


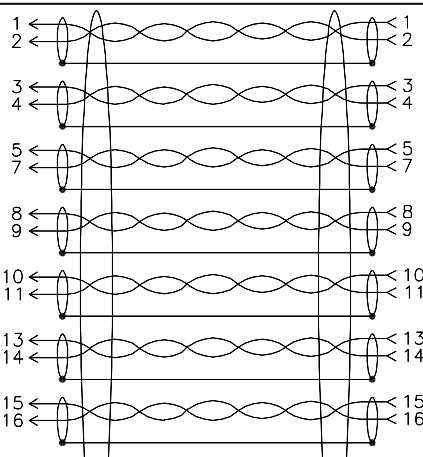
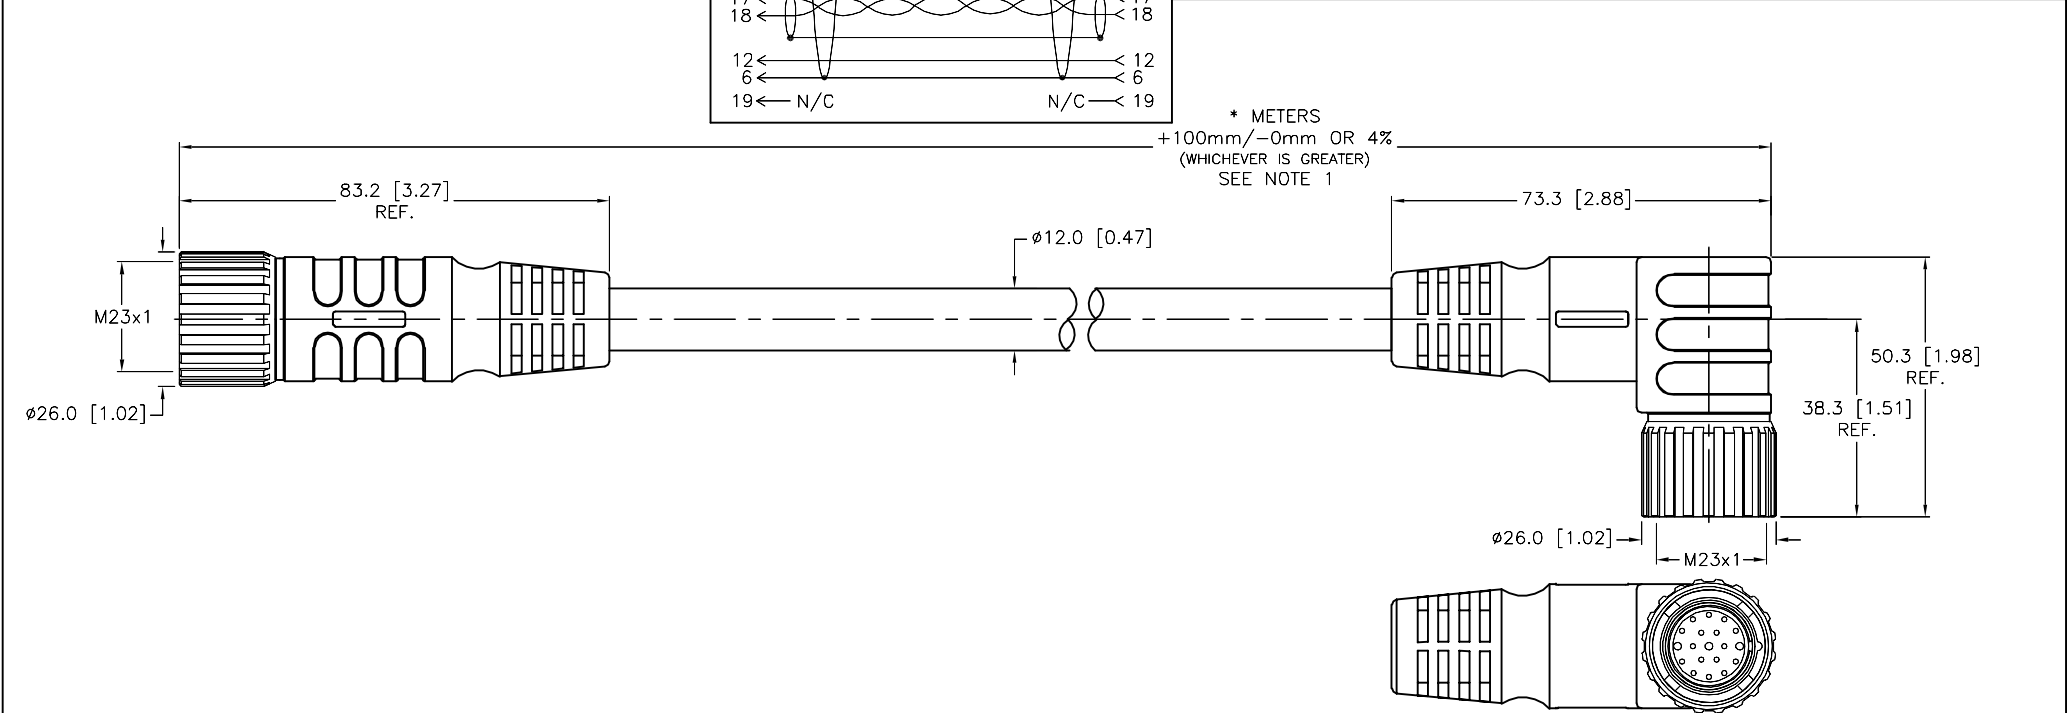


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = WHT/BLK 2 = BLK/WHT 3 = WHT/GRN 4 = GRN/WHT 5 = WHT/RED 6 = DRAIN 7 = RED/WHT 8 = WHT/ORG 9 = ORG/WHT 10 = WHT/BLU 11 = BLU/WHT 12 = GRN/YEL 13 = WHT/BRN 14 = BRN/WHT 15 = WHT/YEL 16 = YEL/WHT 17 = WHT/VLT 18 = VLT/WHT 19 = N/C	 1 = WHT/BLK 2 = BLK/WHT 3 = WHT/GRN 4 = GRN/WHT 5 = WHT/RED 6 = DRAIN 7 = RED/WHT 8 = WHT/ORG 9 = ORG/WHT 10 = WHT/BLU 11 = BLU/WHT 12 = GRN/YEL 13 = WHT/BRN 14 = BRN/WHT 15 = WHT/YEL 16 = YEL/WHT 17 = WHT/VLT 18 = VLT/WHT 19 = N/C		CONTACT CARRIER MATERIAL	NYLON or PBT
			MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	2.0 A
			RATED VOLTAGE [V]	150 V
			OUTER JACKET MATERIAL/COLOR	PVC/PLUM
			CONDUCTOR INSULATION MATERIAL	PVC
			CONDUCTORS	16x22 AWG, 1x18 AWG GROUND
			DRAIN/SHIELD	9x22 AWG DRAINS/ALUMINUM FOIL SHIELDED
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	IEC IP67
			CONDUCTOR ARRANGEMENT	8 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN
			CABLE RATINGS	UL: ITC/PLTC/AWM, 105°C, 300 V CSA: CMG/AWM, 105°C, 300 V



NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS					DRFT RDS APVD		DATE 07/15/05 SCALE 1=1.5		DESCRIPTION P-CSMV CKWMV 19-959-*		IDENTIFICATION NO.	
FINISH SEE SPECIFICATIONS					UNIT OF MEASUREMENT MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		REV F		FILE: 777011514	
F UPDATE RATED CURRENT REV DESCRIPTION					NF 04/19/19 69449 BY DATE ECO NO.		CONTACT TURCK FOR MORE INFORMATION		SHEET 1 OF 1		777011514	