


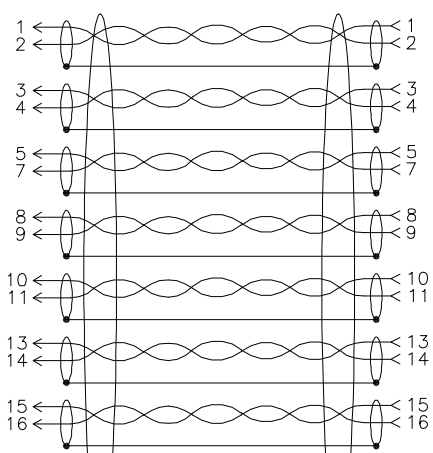


MALE END VIEW		FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = WHT/BLK 2 = BLK/WHT 3 = WHT/GRN 4 = GRN/WHT 5 = WHT/RED 6 = DRAIN 7 = RED/WHT 8 = WHT/ORG 9 = ORG/WHT 10 = WHT/BLU 11 = BLU/WHT 12 = GRN/YEL 13 = WHT/BRN 14 = BRN/WHT 15 = WHT/YEL 16 = YEL/WHT 17 = WHT/VLT 18 = VLT/WHT 19 = N/C  M23 connector		  M23 connector		CONTACT CARRIER MATERIAL	NYLON or PBT
				MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
				RATED CURRENT [A]	2.0 A
				RATED VOLTAGE [V]	150 V
				OUTER JACKET MATERIAL/COLOR	PVC/PLUM
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	16x22 AWG, 1x18 AWG GROUND
				DRAIN/SHIELD	9x22 AWG DRAINS/ALUMINUM FOIL SHIELDED
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS IEC IP67
				CONDUCTOR ARRANGEMENT	8 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN
				CABLE RATINGS	UL: ITC/PLTC/AWM, 105C, 300V CSA: CMG/AWM, 105C, 300V

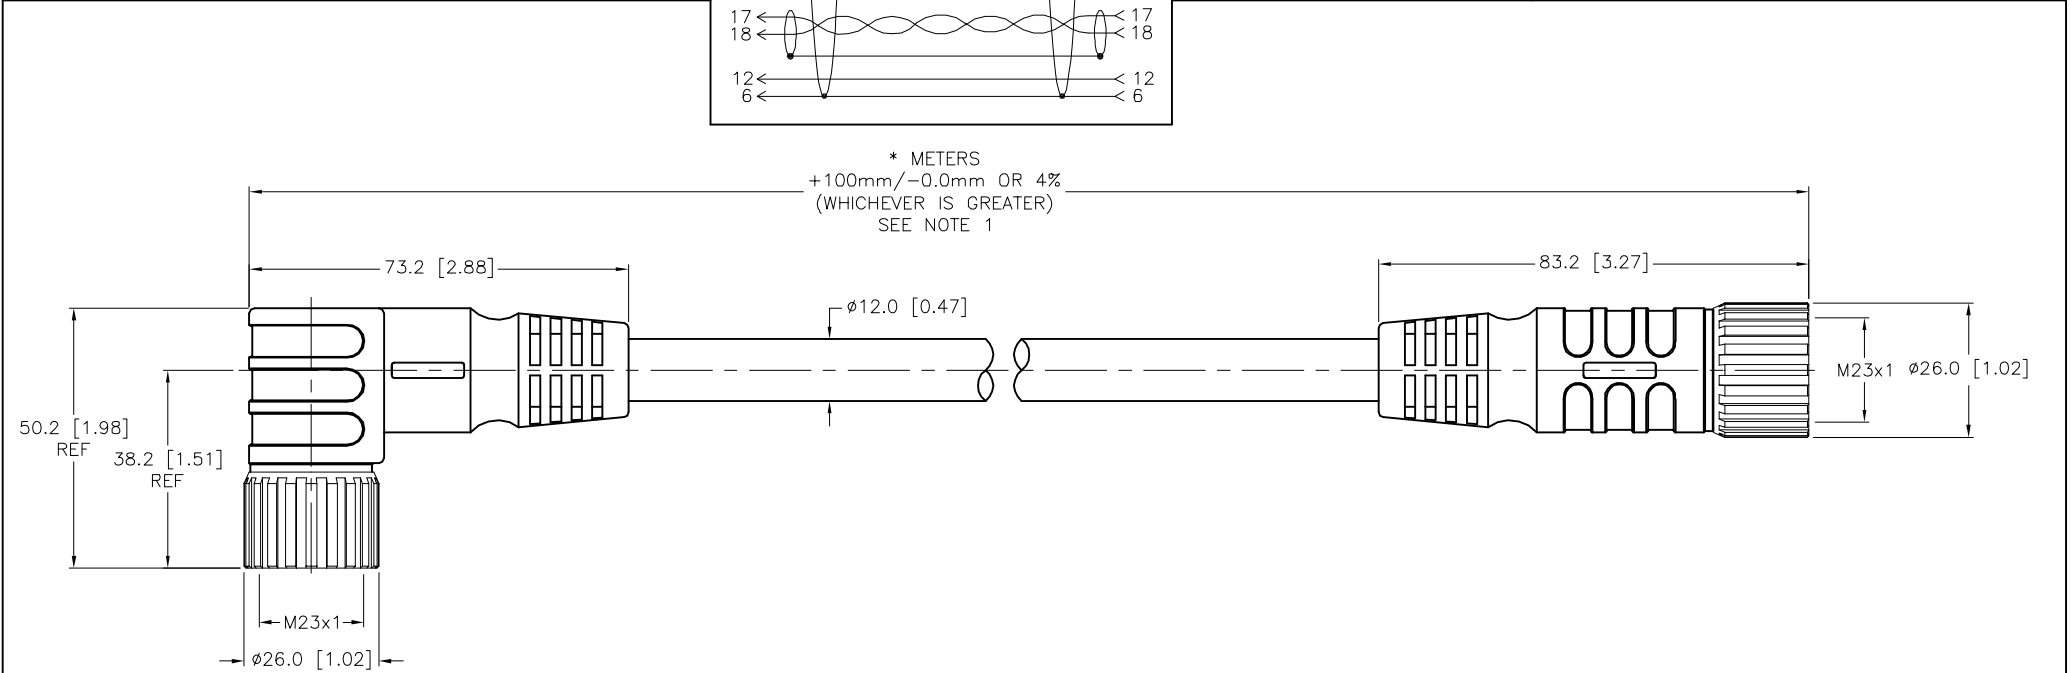

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

TURCK

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

RELATED DOCUMENTS

1.
2.
3.
4.

MATERIAL

SEE SPECIFICAITONS

FINISH

SEE SPECIFICAITONS

3RD ANGLE PROJECTION

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RWC DATE 03/29/06

APVD SCALE 1=1.5

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

DESCRIPTION

P-CSWMV CKMV 19-959-*

IDENTIFICATION NO.

REV

F

F	UPDATE RATED CURRENT	NF	04/19/19	69449
REV	DESCRIPTION	BY	DATE	ECO. NO.

FILE: 777011515

SHEET 1 OF 1