


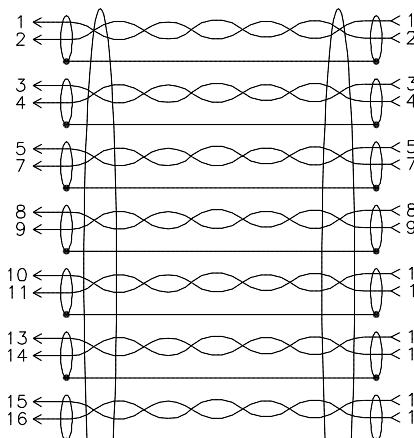



MALE END VIEW		FEMALE END VIEW		WIRING DIAGRAM		SPECIFICATIONS																													
 1 = WHT/BLK 2 = BLK/WHT 3 = WHT/GRN 4 = GRN/WHT 5 = WHT/RED 6 = DRAIN 7 = RED/WHT 8 = WHT/ORG 9 = ORG/WHT 10 = WHT/BLU 11 = BLU/WHT 12 = GRN/YEL 13 = WHT/BRN 14 = BRN/WHT 15 = WHT/YEL 16 = YEL/WHT 17 = WHT/VLT 18 = VLT/WHT 19 = N/C		 1 = WHT/BLK 2 = BLK/WHT 3 = WHT/GRN 4 = GRN/WHT 5 = WHT/RED 6 = DRAIN 7 = RED/WHT 8 = WHT/ORG 9 = ORG/WHT 10 = WHT/BLU 11 = BLU/WHT 12 = GRN/YEL 13 = WHT/BRN 14 = BRN/WHT 15 = WHT/YEL 16 = YEL/WHT 17 = WHT/VLT 18 = VLT/WHT 19 = N/C				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON or PBT</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/FINISH</td><td>316 STAINLESS STEEL/PASSIVATED</td></tr><tr><td>RATED CURRENT [A]</td><td>9.0 A (PIN 12), 2.0 A (ALL OTHERS)</td></tr><tr><td>RATED VOLTAGE [V]</td><td>150 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/BLUE</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>CONDUCTORS</td><td>16x22 AWG, 1x18 AWG GROUND</td></tr><tr><td>DRAIN/SHIELD</td><td>9x22 AWG DRAINS/ALUMINUM FOIL SHIELDED</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>IEC IP67</td></tr><tr><td>CONDUCTOR ARRANGEMENT</td><td>8 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN</td></tr><tr><td>CABLE RATINGS</td><td>UL: ITC/PLTC/AWM, 105°C, 300 V CSA: CMG/AWM, 105°C, 300 V</td></tr></table>		CONTACT CARRIER MATERIAL	NYLON or PBT	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/FINISH	316 STAINLESS STEEL/PASSIVATED	RATED CURRENT [A]	9.0 A (PIN 12), 2.0 A (ALL OTHERS)	RATED VOLTAGE [V]	150 V	OUTER JACKET MATERIAL/COLOR	PVC/BLUE	CONDUCTOR INSULATION MATERIAL	PVC	CONDUCTORS	16x22 AWG, 1x18 AWG GROUND	DRAIN/SHIELD	9x22 AWG DRAINS/ALUMINUM FOIL SHIELDED	TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	IEC IP67	CONDUCTOR ARRANGEMENT	8 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN	CABLE RATINGS	UL: ITC/PLTC/AWM, 105°C, 300 V CSA: CMG/AWM, 105°C, 300 V
CONTACT CARRIER MATERIAL	NYLON or PBT																																		
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK																																		
CONTACT MATERIAL/PLATING	BRASS/GOLD																																		
COUPLING NUT MATERIAL/FINISH	316 STAINLESS STEEL/PASSIVATED																																		
RATED CURRENT [A]	9.0 A (PIN 12), 2.0 A (ALL OTHERS)																																		
RATED VOLTAGE [V]	150 V																																		
OUTER JACKET MATERIAL/COLOR	PVC/BLUE																																		
CONDUCTOR INSULATION MATERIAL	PVC																																		
CONDUCTORS	16x22 AWG, 1x18 AWG GROUND																																		
DRAIN/SHIELD	9x22 AWG DRAINS/ALUMINUM FOIL SHIELDED																																		
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)																																		
PROTECTION CLASS	IEC IP67																																		
CONDUCTOR ARRANGEMENT	8 SHIELDED TWISTED PAIR W/DRAIN, 1 GND, 1 DRAIN																																		
CABLE RATINGS	UL: ITC/PLTC/AWM, 105°C, 300 V CSA: CMG/AWM, 105°C, 300 V																																		

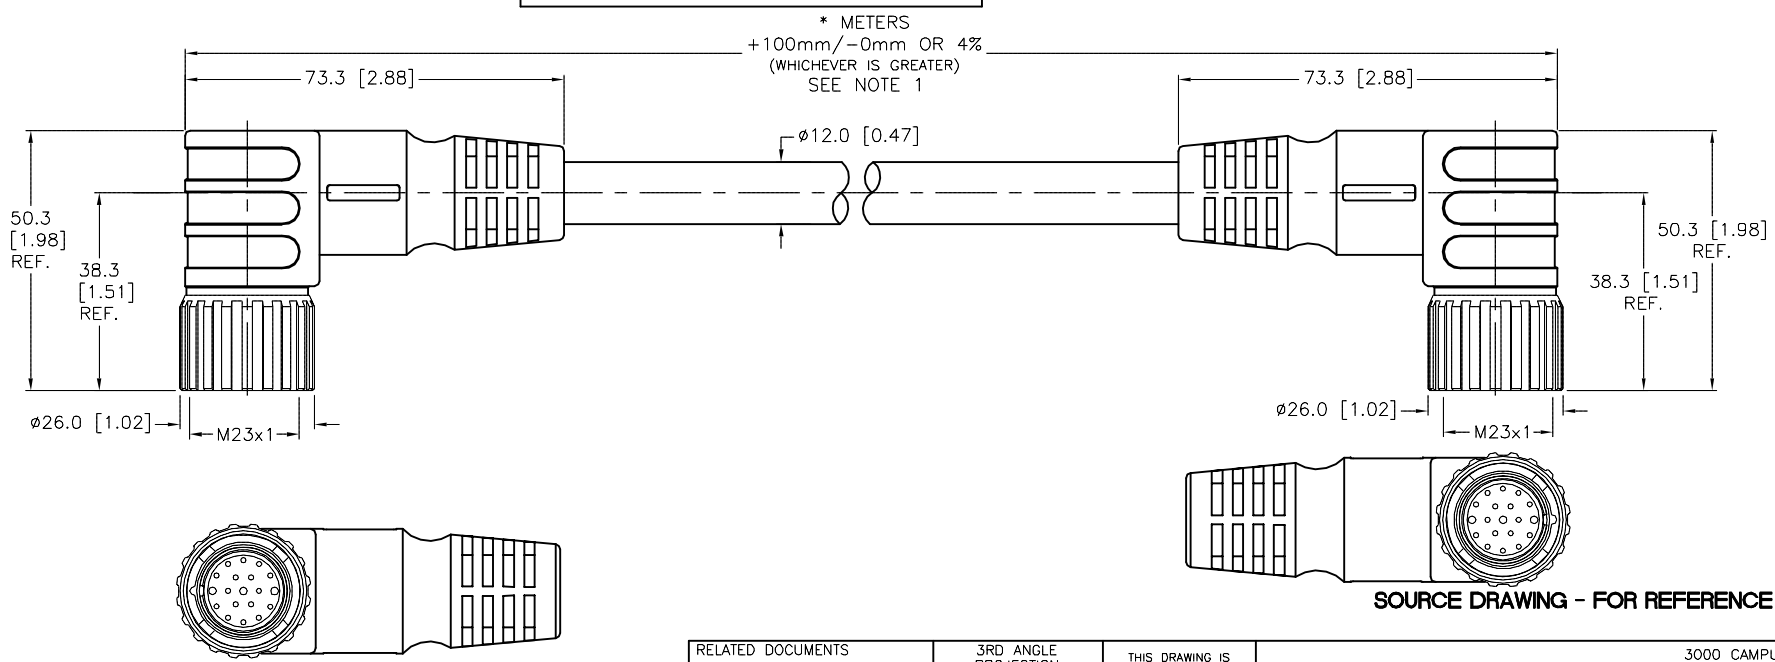

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

A	DRAWING RELEASE	RDS	07/28/20	
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT RDS	DATE 04/25/05	DESCRIPTION P-CSWMV CKWMV 19-977-*
FINISH SEE SPECIFICATIONS	APVD T.S.		SCALE 1=1.5		
		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	
		DO NOT SCALE THIS DRAWING		REV A	
				FILE: 777011552	
				SHEET 1 OF 1	