


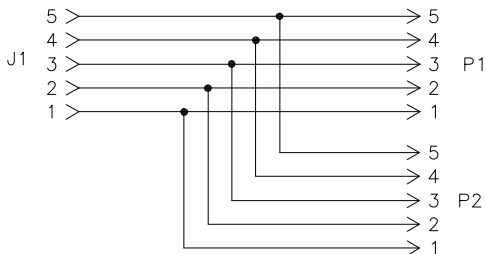


FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL	TPU
   			MOLDED HEAD MATERIAL/COLOR	TPU/BLE-GRAY
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	250 V
			OUTER JACKET MATERIAL/COLOR	PVC/GRAY
			CONDUCTOR INSULATION MATERIAL	FOAMED HDPE (DATA), PVC (POWER)
			NUMBER OF CONDUCTORS [AWG]	4x22 AWG, 22 AWG DRAIN
			SHIELDING	FOIL (PAIRS), FOIL (OVERALL)
			TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

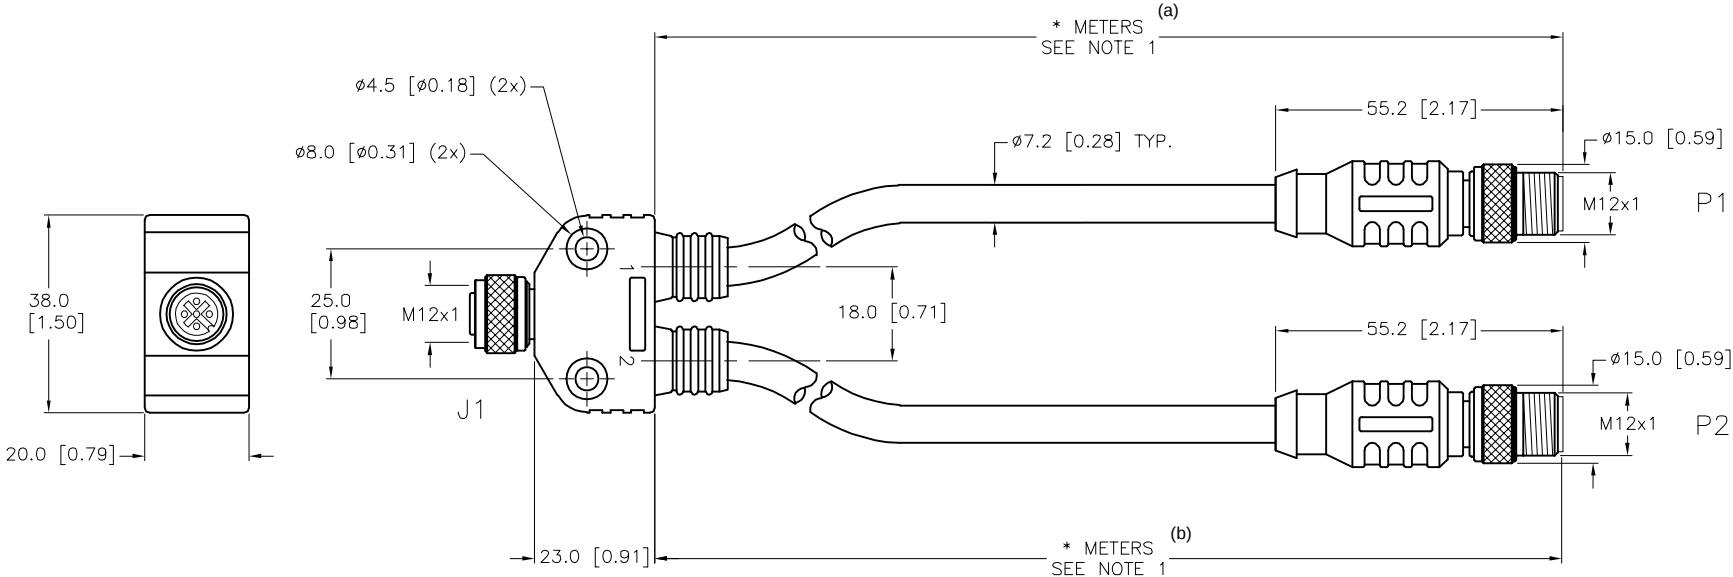


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							TURCK			
MATERIAL					DRFT RDS		DATE 07/18/05		DESCRIPTION	
FINISH					APVD T.V.		SCALE 1=1.5		(a) (b) VB2-FKM/2RSC 572-*M-*M	
							UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	
									REV D	
D DRAWING PROCESSED AS PART OF ECO 33971					CBM 04/06/11		33971			
REV DESCRIPTION					BY DATE		ECO NO.		DO NOT SCALE THIS DRAWING	
									FILE: 777011682	
									SHEET 1 OF 1	