







MALE END VIEW	FEMALE END VIEW	MOUNTING HOLE	SPECIFICATIONS	
 1 = WHITE/ORANGE (+TX) 2 = WHITE/GREEN (+RX) 3 = ORANGE (-TX) 4 = GREEN (-RX)	 1 = WHITE/ORANGE (+TX) 2 = WHITE/GREEN (+RX) 3 = ORANGE (-TX) 4 = GREEN (-RX)		CONTACT CARRIER MATERIAL	TPU
 Ethernet			MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	250 V
			OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL
			CONDUCTOR INSULATION MATERIAL	HDPE
			NUMBER OF CONDUCTORS [AWG]	2UTPx24 AWG, STRANDED
			SHIELDING	ALUM./POLYESTER FOIL AND TINNED COPPER BRAID
			TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
			PROTECTION CLASS	IP67
			MAX. PANEL THICKNESS	5.5mm [0.216"]

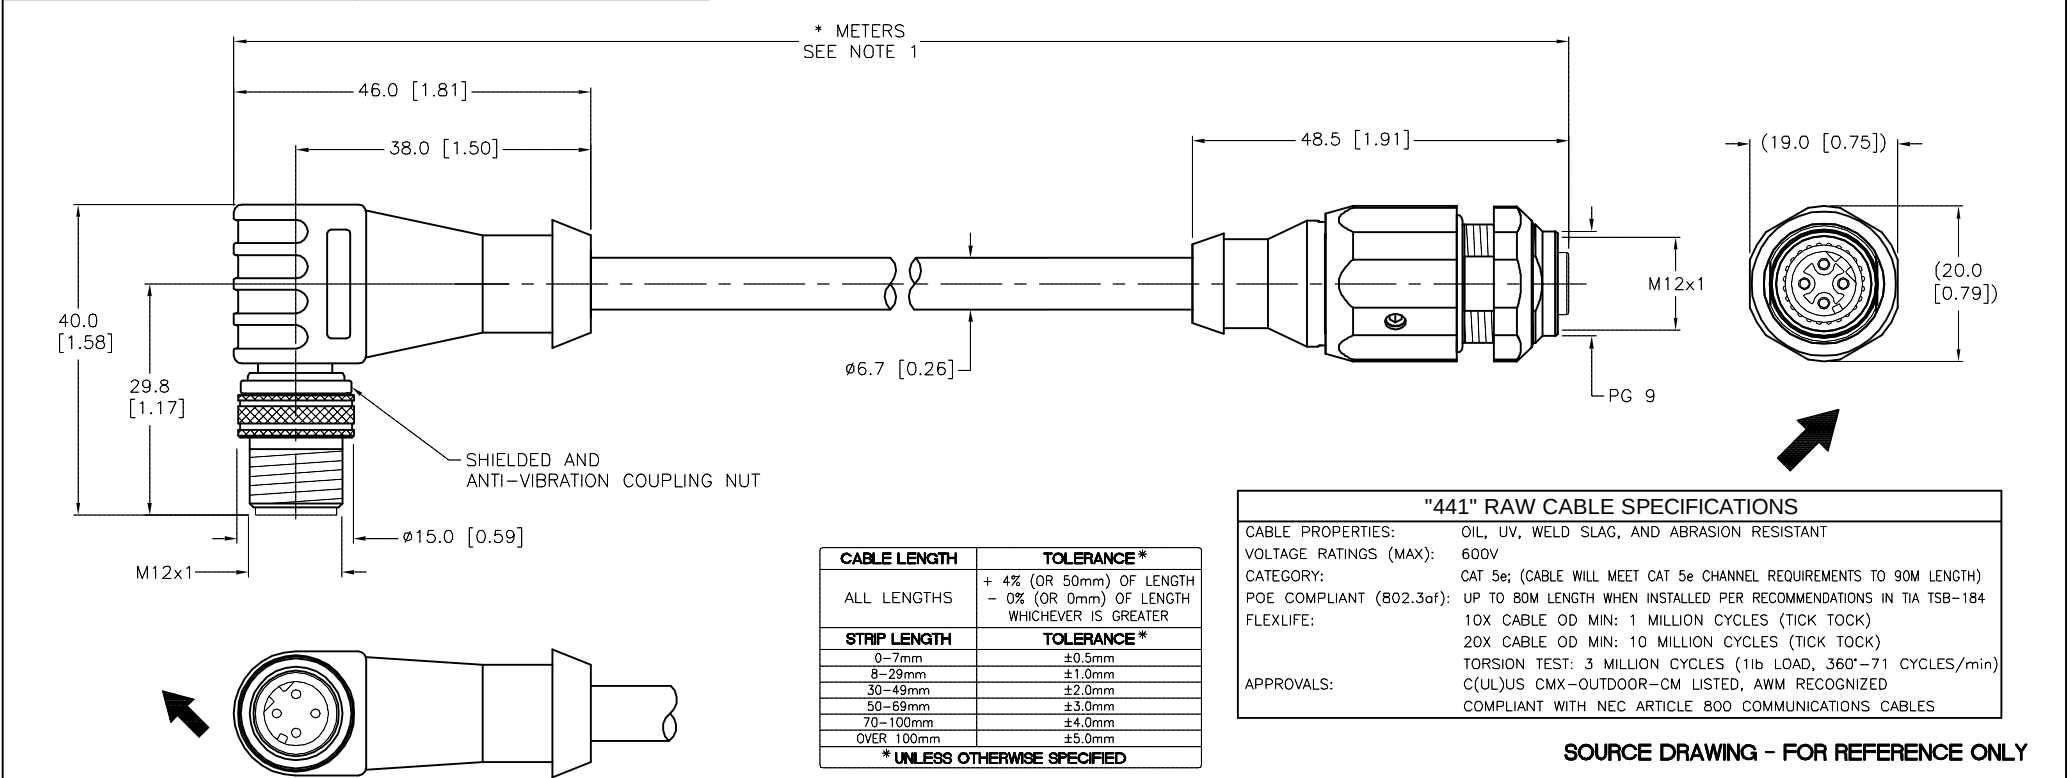

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

— DESIGNATES PRIMARY KEYWAY DESIGNATION

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.  — DESIGNATES PRIMARY KEYWAY DESIGNATION					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. 		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT RDS		DATE 07/19/05		DESCRIPTION WSSD FKSD 441-*M	
					FINISH				APVD		SCALE 1=1.0			
						UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV K				
						MILLIMETER [INCH]								
								DO NOT SCALE THIS DRAWING		FILE: 777011683				
										SHEET 1 OF 1				