


SPECIFICATIONS					
CONTACT CARRIER MATERIAL/COLOR	POLYCARBONATE/CLEAR				
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK				
CONTACT MATERIAL/PLATING	BRONZE/GOLD				
RATED CURRENT [A]	1.5 A				
RATED VOLTAGE [V]	42 V				
OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL				
CONDUCTOR INSULATION MATERIAL	HDPE				
NUMBER OF CONDUCTORS [AWG]	2UTPx24 AWG, STRANDED				
SHIELDING	ALUM./POLY. FOIL & T-C BRAIDED				
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)				
PROTECTION CLASS	IEC IP20				

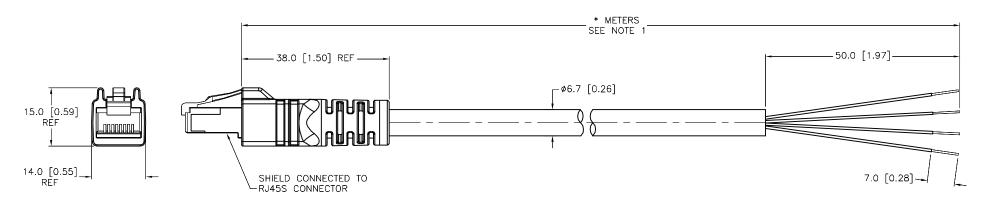

CABLE LENGTH	TOLERANCE*			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNILESS OTHERWISE SPECIFIED				

"441" RAW CABLE SPECIFICATIONS

CABLE PROPERTIES: OIL, UV, WELD SLAG, AND ABRASION RESISTANT

VOLTAGE RATINGS (MAX): 600V

CAT 5e; (CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 90M LENGTH)

POE COMPLIANT (802.3af): UP TO 80M LENGTH WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184

FLEXLIFE: 10X CABLE OD MIN: 1 MILLION CYCLES (TICK TOCK)

20X CABLE OD MIN: 10 MILLION CYCLES (TICK TOCK)

TORSION TEST: 3 MILLION CYCLES (11b LOAD, 360'-71 CYCLES/min)

APPROVALS: C(UL)US CMX-OUTDOOR-CM LISTED, AWM RECOGNIZED

COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES

SOURCE DRAWING - FOR REFERENCE ONLY

	RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	CONFIDE PROPEI INC. DOCUM WRITTEN	DRAWING IS ENTIAL AND THE RTY OF TURCK USE OF THIS MENT WITHOUT PERMISSION IS ROHIBITED.				(763) (763)	LIS, MN -544- 553-7	1 55441 7769 300 708 fax
	MATERIAL		DRFT	RDS	DATE 09/09/05	DESCRIPTION	DIAEC	441-*M		
		ALL DIMENSIONS DISPLAYED ON THIS	APVD		SCALE 1=1.0		KJ455	44 - " VI		
FINISH		DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT							
	FINISH		MILLIMETER [INCH]		IDENTIFICATION NO).			REV	
			D	O NOT SCALE	THIS DRAWING	FILE: 7770117	32		SHEET	1 OF

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

UPDATE CABLE DIAMETER KMY 11/14/14 47778

EV DESCRIPTION BY DATE ECO NO.