


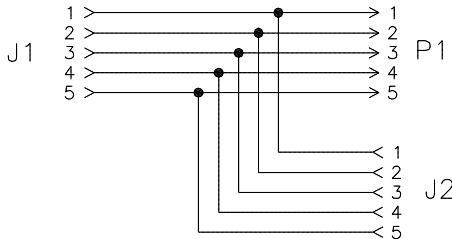




FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																									
 1 = BARE (SHIELD) 2 = RED (+ VOLTAGE) 3 = BLACK (- VOLTAGE) 4 = WHITE (CAN_H) 5 = BLUE (CAN_L)	 1 = BARE (SHIELD) 2 = RED (+ VOLTAGE) 3 = BLACK (- VOLTAGE) 4 = WHITE (CAN_H) 5 = BLUE (CAN_L)		<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLUE-GRAY</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 VAC</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>HDPE (DATA), PVC (POWER)</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x22 AWG, 22 AWG DRAIN</td></tr><tr><td>SHIELDING</td><td>FOIL (PAIRS), FOIL (OVERALL)</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +80°C (-40°F to +176°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP 67</td></tr></table>	CONTACT CARRIER MATERIAL	TPU	MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 VAC	OUTER JACKET MATERIAL/COLOR	PVC/GRAY	CONDUCTOR INSULATION MATERIAL	HDPE (DATA), PVC (POWER)	NUMBER OF CONDUCTORS [AWG]	4x22 AWG, 22 AWG DRAIN	SHIELDING	FOIL (PAIRS), FOIL (OVERALL)	TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP 67	
CONTACT CARRIER MATERIAL	TPU																											
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY																											
CONTACT MATERIAL/PLATING	BRASS/GOLD																											
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																											
RATED CURRENT [A]	4.0 A																											
RATED VOLTAGE [V]	250 VAC																											
OUTER JACKET MATERIAL/COLOR	PVC/GRAY																											
CONDUCTOR INSULATION MATERIAL	HDPE (DATA), PVC (POWER)																											
NUMBER OF CONDUCTORS [AWG]	4x22 AWG, 22 AWG DRAIN																											
SHIELDING	FOIL (PAIRS), FOIL (OVERALL)																											
TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)																											
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP 67																											
																												

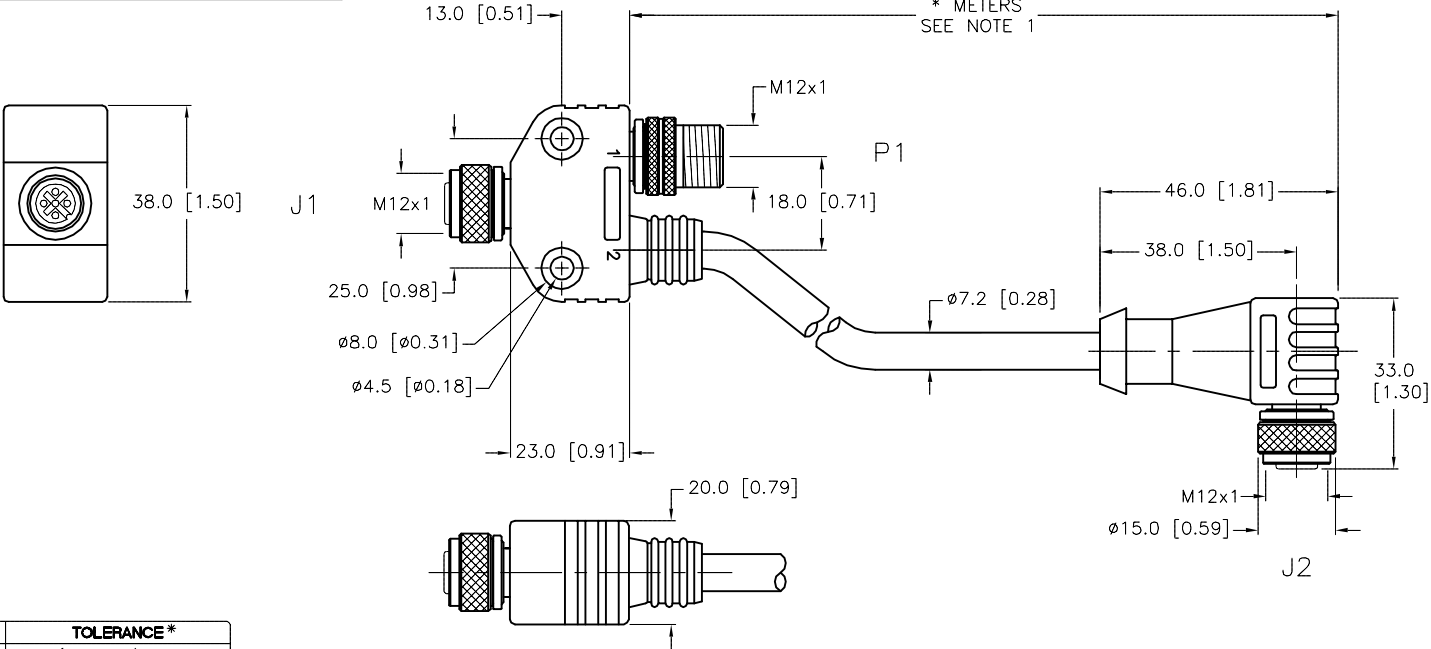


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

D	UPDATED CONTACT CARRIER SPECS PER ECO	TV	03/10/16	53627
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.		TURCK INC <i>High Technology Sensors and Automation Controls</i>			
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE 01/26/06	DESCRIPTION VB2-FKM/FSM/WKC 572-*M
		APVD		SCALE 1 = 1.5	
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.
		DO NOT SCALE THIS DRAWING			
			CONTACT TURCK FOR MORE INFORMATION		
	FILE: 777011875			SHEET 1 OF 1	