






RJ45 END VIEW	FEMALE END VIEW	TYPICAL PANEL CUTOUT	SPECIFICATIONS																																	
<div><p>12345678</p><p>1 = WHITE/ORANGE (+TX) 2 = ORANGE (-TX) 3 = WHITE/GREEN (+RX) 4 = N/C 5 = N/C 6 = GREEN (-RX) 7 = N/C 8 = N/C</p><p>Ethernet</p></div>	<div><p>1 = WHITE/ORANGE (+TX) 2 = WHITE/GREEN (+RX) 3 = ORANGE (-TX) 4 = GREEN (-RX)</p><p>Ethernet</p></div>	<div><p>(FOR SHOULDER WASHER)</p><p>ø18.0 [ø0.71]</p></div>	<table><tr><td>CONTACT CARRIER MATERIAL (P1)</td><td>POLYCARBONATE</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR (P1)</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING (P1)</td><td>BRONZE/GOLD</td></tr><tr><td>CONTACT CARRIER MATERIAL/COLOR (J1)</td><td>TPU/BLACK</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR (J1)</td><td>TPU/BLUE-GRAY</td></tr><tr><td>CONTACT MATERIAL/PLATING (J1)</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING (J1)</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>1.5 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>42 V</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>TPE/TEAL</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>HDPE</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>2UTPx24 AWG, STRANDED</td></tr><tr><td>SHIELDING</td><td>ALUM.-POLYESTER FOIL & T-C BRAIDED</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +80°C (-40°F to +176°F)</td></tr><tr><td>PROTECTION CLASS</td><td>IP67 (RJ45/IP20)</td></tr><tr><td>MAX. PANEL THICKNESS (J1)</td><td>4.0mm [0.157"] (C1220)</td></tr></table>	CONTACT CARRIER MATERIAL (P1)	POLYCARBONATE	MOLDED HEAD MATERIAL/COLOR (P1)	TPU/BLACK	CONTACT MATERIAL/PLATING (P1)	BRONZE/GOLD	CONTACT CARRIER MATERIAL/COLOR (J1)	TPU/BLACK	MOLDED HEAD MATERIAL/COLOR (J1)	TPU/BLUE-GRAY	CONTACT MATERIAL/PLATING (J1)	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING (J1)	BRASS/NICKEL	RATED CURRENT [A]	1.5 A	RATED VOLTAGE [V]	42 V	OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL	CONDUCTOR INSULATION MATERIAL	HDPE	NUMBER OF CONDUCTORS [AWG]	2UTPx24 AWG, STRANDED	SHIELDING	ALUM.-POLYESTER FOIL & T-C BRAIDED	TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)	PROTECTION CLASS	IP67 (RJ45/IP20)	MAX. PANEL THICKNESS (J1)	4.0mm [0.157"] (C1220)	
CONTACT CARRIER MATERIAL (P1)	POLYCARBONATE																																			
MOLDED HEAD MATERIAL/COLOR (P1)	TPU/BLACK																																			
CONTACT MATERIAL/PLATING (P1)	BRONZE/GOLD																																			
CONTACT CARRIER MATERIAL/COLOR (J1)	TPU/BLACK																																			
MOLDED HEAD MATERIAL/COLOR (J1)	TPU/BLUE-GRAY																																			
CONTACT MATERIAL/PLATING (J1)	BRASS/GOLD																																			
COUPLING NUT MATERIAL/PLATING (J1)	BRASS/NICKEL																																			
RATED CURRENT [A]	1.5 A																																			
RATED VOLTAGE [V]	42 V																																			
OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL																																			
CONDUCTOR INSULATION MATERIAL	HDPE																																			
NUMBER OF CONDUCTORS [AWG]	2UTPx24 AWG, STRANDED																																			
SHIELDING	ALUM.-POLYESTER FOIL & T-C BRAIDED																																			
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)																																			
PROTECTION CLASS	IP67 (RJ45/IP20)																																			
MAX. PANEL THICKNESS (J1)	4.0mm [0.157"] (C1220)																																			

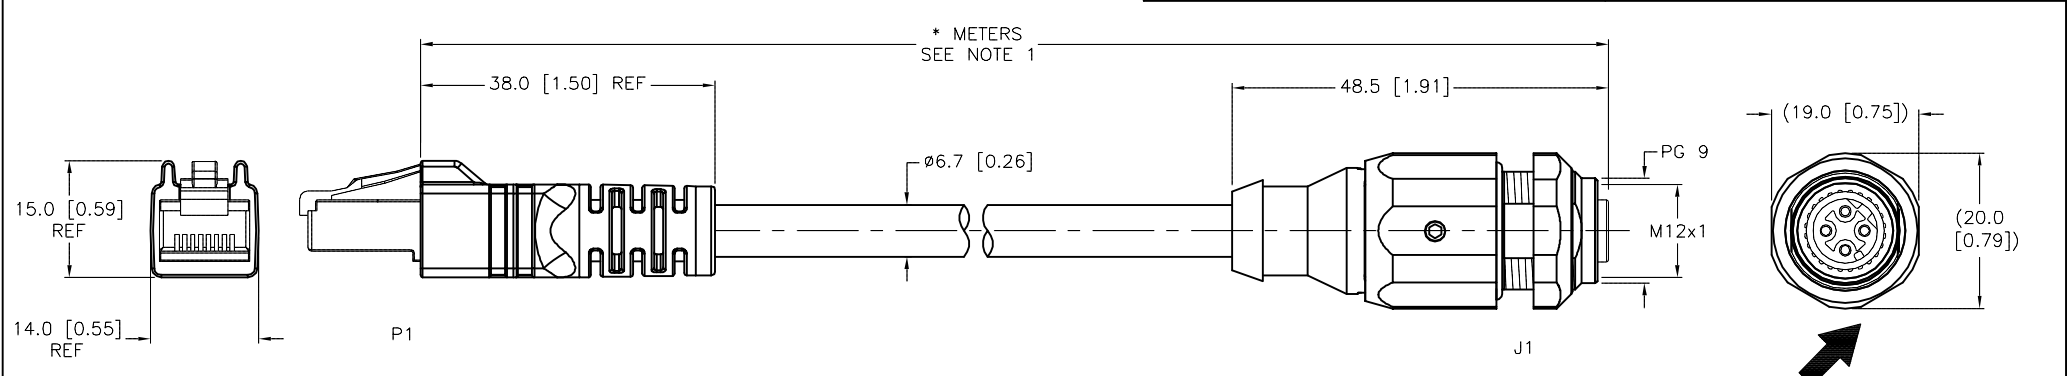

CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

*UNLESS OTHERWISE SPECIFIED

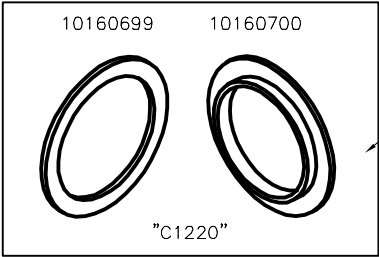

SEE NOTE 3

"441" RAW CABLE SPECIFICATIONS	
CABLE PROPERTIES:	OIL, UV, WELD SLAG, AND ABRASION RESISTANT
VOLTAGE RATINGS (MAX):	600V
CATEGORY:	CAT 5e; (CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 90M LENGTH)
POE COMPLIANT (802.3af):	UP TO 80M LENGTH WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184
FLEXLIFE:	10X CABLE OD MIN: 1 MILLION CYCLES (TICK TOCK) 20X CABLE OD MIN: 10 MILLION CYCLES (TICK TOCK) TORSION TEST: 3 MILLION CYCLES (1lb LOAD, 360°-71 CYCLES/min)
APPROVALS:	C(UL)US CMX-OUTDOOR-CM LISTED, AWM RECOGNIZED COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/C1195" DESIGNATES PERFORMANCE TESTING USING A FLUKE CABLE ANALYZER. TEST RESULT INCLUDED IN PACKAGING.

3. "/C1220" DESIGNATES ISOLATION BUSHING AND WASHER INCLUDED WITH FKSDDED END. PART NUMBERS ARE: 10160700, 10160699.

L	UPDATE CABLE DIAMETER	KMY	11/14/14	47778
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS

1.
2.
3.
4.


MATERIAL

FINISH

ALL DIMENSIONS
DISPLAYED ON THIS
DRAWING ARE FOR
REFERENCE ONLY

CONTACT TURCK
FOR MORE
INFORMATION


PROJECTION



THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us



DATE 03/21/06

SCALE 1=1.0

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DESCRIPTION
RJ45 FKSDDED 441-*M/C1195/C1220

IDENTIFICATION NO.

REV
L

FILE: 777011916

SHEET 1 OF 1