



Technical drawing of a cable assembly. The drawing shows a cable with two connectors. The left connector is labeled J1 and has a diameter of $\phi 26.0$ [1.02] and a length of 50.5 [1.99]. The right connector is labeled P1 and has a diameter of $\phi 15.0$ [0.59] and a length of 48.5 [1.91]. The cable has a diameter of $\phi 6.7$ [0.27]. The total length of the cable is indicated as * METERS SEE NOTE 1. The drawing also shows a cross-section of the cable with a central conductor and a shield. The shield is labeled ANTI-VIBRATION DETENT. The drawing includes a table with dimensions and tolerances.

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	± 0.5 mm

SOURCE DRAWING - FOR REFERENCE ONLY

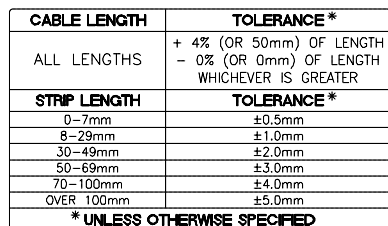

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	RWC	DATE	11/02/05	DESCRIPTION RKM 40-*M-RSC 4.4T		
SEE SPECIFICATIONS		APVD		SCALE	1=1.0			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING	IDENTIFICATION NO.				REV D	
SEE SPECIFICATIONS	FILE: 777012168							