




MALE END VIEW		FEMALE END VIEW	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL/COLOR	NYLON or PBT/GRAY
 M23 connector		 M23 connector	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
1 = BROWN 2 = N/C 3 = BLUE 4 = WHITE 5 = GREEN 6 = YELLOW 7 = GRAY 8 = PINK 9 = RED 10 = BLACK 11 = VIOLET 12 = GREEN/YELLOW			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	6.0 A
			RATED VOLTAGE [V]	300 V
			OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
			CONDUCTOR INSULATION MATERIAL	PVC
			CONDUCTORS	11x18 AWG
			DRAIN/SHIELD	20 AWG/ALUMINUM-POLYESTER FOIL
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS IEC IP67
			CABLE RATINGS	UL: ITC/PLTC/AWM, 105°C, 300 V CSA: CMG/AWM, 105°C, 300 V

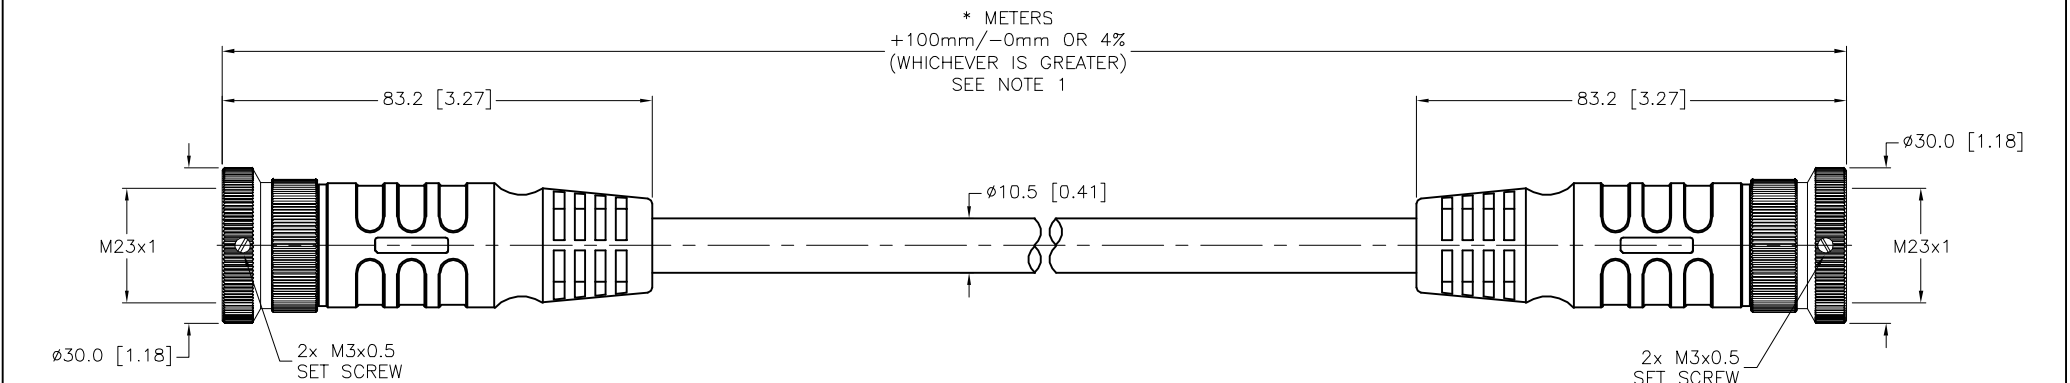

NOTES:		SOURCE DRAWING - FOR REFERENCE ONLY	
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.		RELATED DOCUMENTS 3RD ANGLE PROJECTION THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us TURCK	
MATERIAL		DRFT	ER
SEE SPECIFICATIONS		APVD	J.S.
FINISH		DATE 08/28/18	
SEE SPECIFICATIONS		SCALE 1=1.5	
		UNIT OF MEASUREMENT	
		MILLIMETER [INCH]	
		DO NOT SCALE THIS DRAWING	
		DESCRIPTION	
		P-CSMT CKMT 12-088-*	
		IDENTIFICATION NO.	
		REV	
		A	
A DRAWING RELEASE		ER 08/31/18	
REV DESCRIPTION		BY DATE ECO NO.	
		FILE: 777012298	
		SHEET 1 OF 1	