



MALE END VIEW(P1-P2)



- 1 = BLUE
2 = BROWN
3 = GREY
4 = GREEN/YELLOW

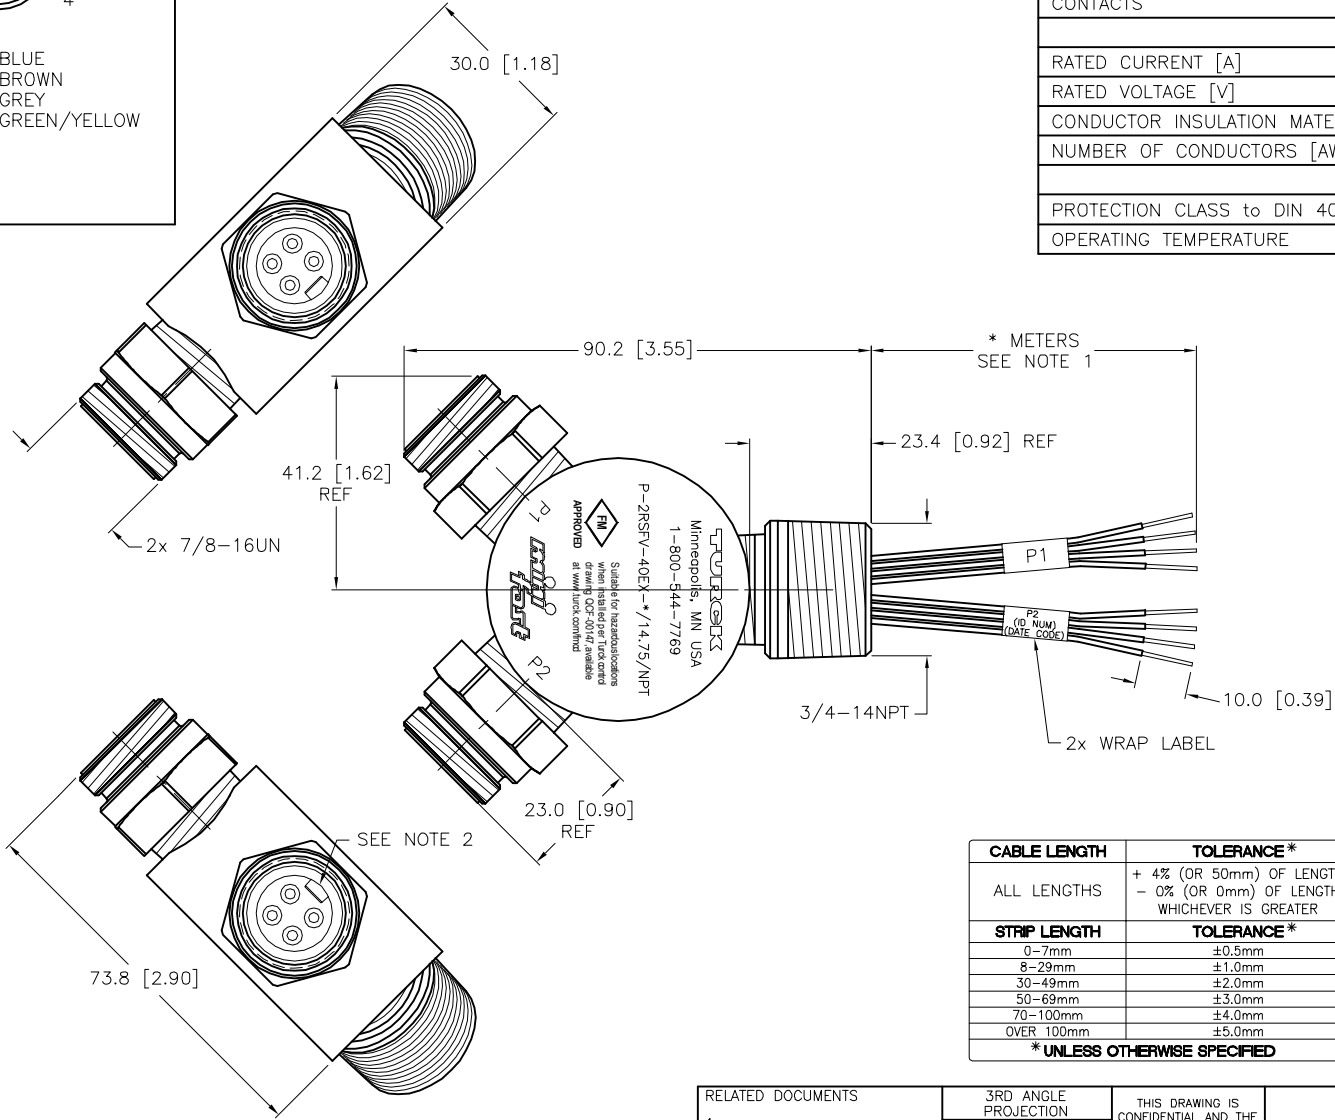

SPECIFICATIONS

MATERIAL


HOUSING/FINISH	316 STAINLESS STEEL/PASSIVATED
RECEPTACLE HOUSING/FINISH	316 STAINLESS STEEL/PASSIVATED
CONTACT CARRIERS/COLOR	TPU/BLACK
CONTACTS	BRASS/GOLD

ELECTRICAL DATA

RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	8x18 AWG

MECHANICAL DATA

PROTECTION CLASS to DIN 40050	NEMA 1,3,4,4X,6P,12 & IECIP67,IP68,IP69,IP69K
OPERATING TEMPERATURE	-40°C to +105°C (-40°F to +221°F)

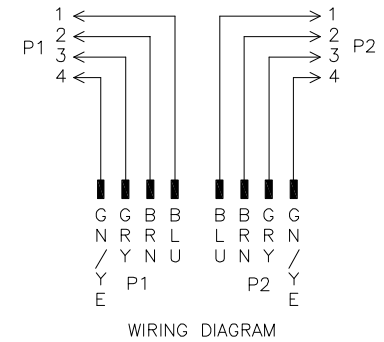

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

*** UNLESS OTHERWISE SPECIFIED**

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. KEYWAY WILL BE AT ANY POSITION.

F	UPDATE PROTECTION CLASS	CBM	04/13/21	76628
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS


- 1.
- 2.
- 3.
- 4.

[illegible]

CONCLUSIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE
PROJECTION

ALL DIMENSIONS
DISPLAYED ON THIS
DRAWING ARE FOR
REFERENCE ONLY

CONTACT TURCK
FOR MORE
INFORMATION

THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

DRFT	TH
APVD	

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

DRFT	TH
APVD	

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

TURCK

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

6	DESCRIPTION
	P-2RSFV-40EX-*/14.75/NPT

IDENTIFICATION NO.

REV
F

FILE: 777012327

SHEET 1 OF 1