



MALE END VIEW



1 = BROWN	14 = WHITE
2 = WHITE/GREY	15 = BLUE
3 = BLUE/GREY	16 = BLACK/GREY
4 = BROWN/GREY	17 = BROWN/ORANGE
5 = BLACK/YELLOW	18 = WHITE/ORANGE
6 = WHITE/YELLOW	19 = BLACK/ORANGE
7 = BLUE/YELLOW	20 = BLACK/GREEN
8 = BROWN/YELLOW	21 = WHITE/GREEN
9 = BLACK/RED	22 = BLUE/GREEN
10 = WHITE/RED	23 = BROWN/GREEN
11 = BLUE/RED	24 = BLUE/ORANGE
12 = BROWN/RED	25 = GREEN/YELLOW
13 = BLACK	26 = N/C

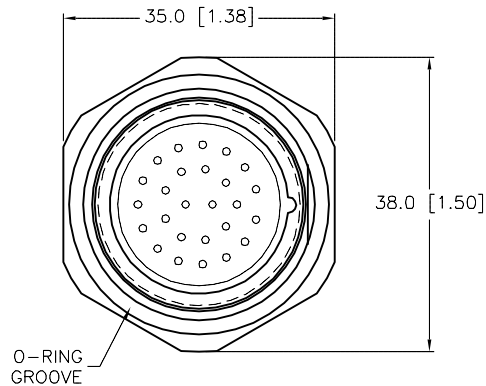


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:


1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
RECEPTACLE HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	150 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	25x22 AWG
TEMPERATURE	-30°C TO +105°C (-22°F TO +221°F)
PROTECTION CLASS	IEC IP67
MOUNTING HOLE	ø30.0mm [1.18"]

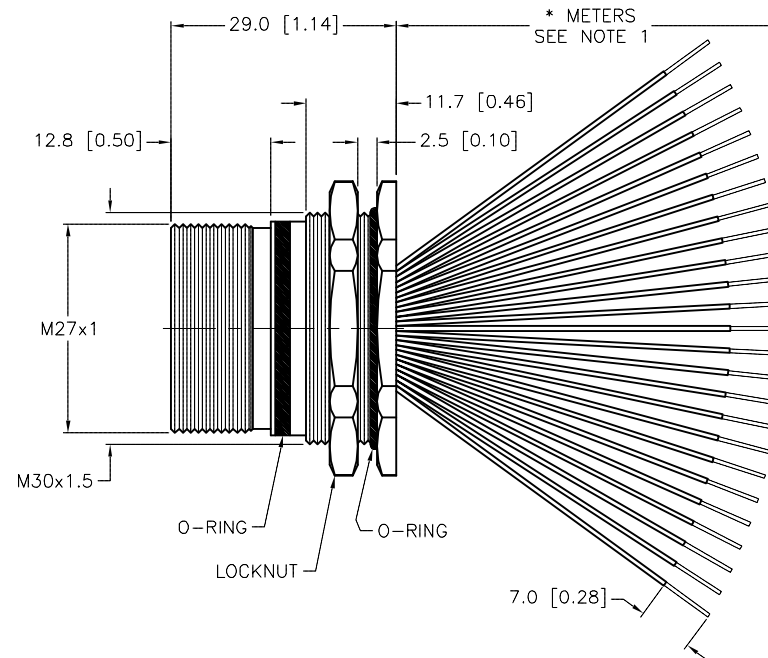

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK inc High Technology Sensors and Automation Controls		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RWC	DATE	02/10/06	DESCRIPTION DSFD 26-25-*		
		APVD		SCALE	1=1.0			
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.			REV D
SEE SPECIFICATIONS								
				FILE: 777012386			SHEET 1 OF 1	