






FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = BROWN 2 = N/C 3 = BLUE 4 = BLACK 	 1 = N/C 2 = BLACK 3 = BLUE 4 = BROWN 		CONTACT CARRIER MATERIAL	TPU OR NYLON
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	250 V
			OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	3x22 AWG
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

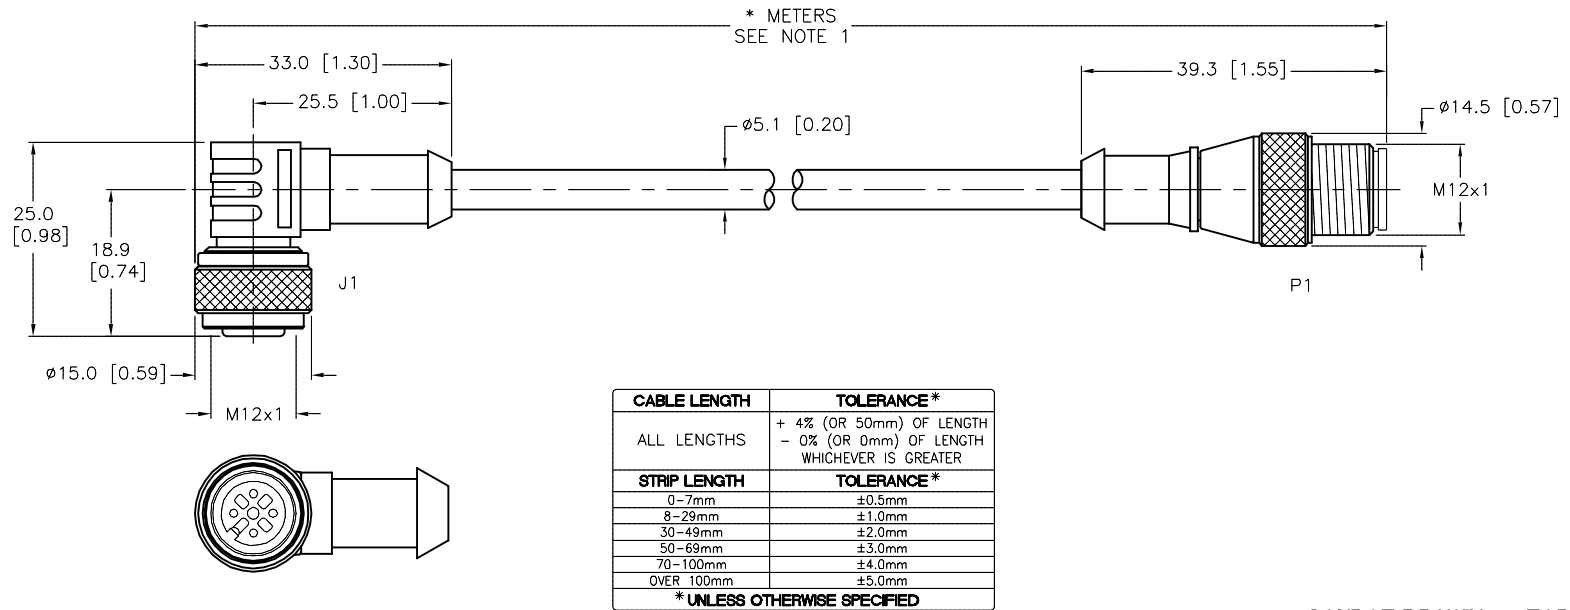

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/S760" DESIGNATES BLACK CABLE.
3. "/CS11019" DESIGNATES CUSTOM WIRING.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							
MATERIAL		DRFT RWC		DATE 02/13/06		DESCRIPTION	
SEE SPECIFICATIONS		APVD		SCALE 1=1.0		WK 4.4T-*--RS 4.4T/S760/CS11019	
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV D	
SEE SPECIFICATIONS							
		DO NOT SCALE THIS DRAWING		FILE: 777012389		SHEET 1 OF 1	

D	UPDATE CABLE SPECIFICATIONS	KMY	05/06/14	44655
REV	DESCRIPTION	BY	DATE	ECO NO.