


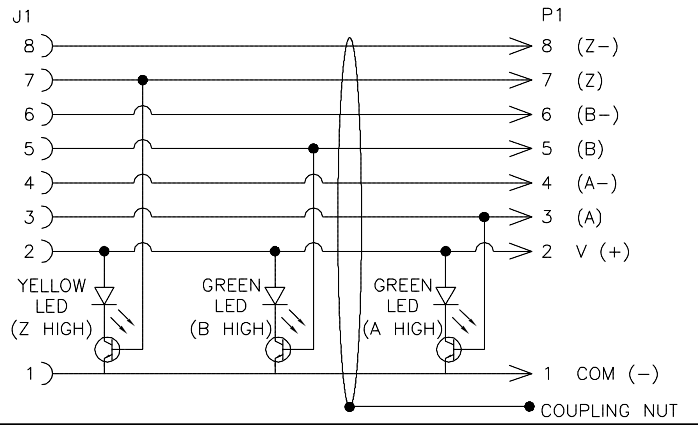



FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
		CONTACT CARRIER MATERIAL	TPU
MALE END VIEW		MOLDED HEAD MATERIAL/COLOR (J1,P1)	TPU/CLEAR (J1) YELLOW (P1)
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	2.0 A
		RATED VOLTAGE [V]	30 VDC
		SUPPLY VOLTAGE RANGE	5-30 VDC
		LED INDICATION THRESHOLD VOLTAGE	1.7 VDC
		LED CURRENT	3.0 mA
		OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	8x24 AWG
		DRAIN/SHIELD	26 AWG DRAIN/FOIL AND BRAIDED SHIELD
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +105°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

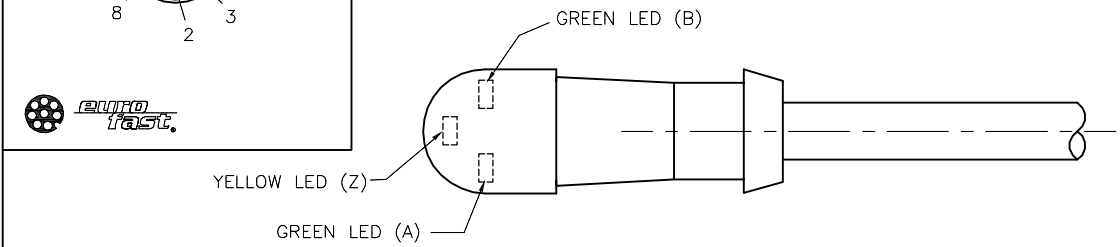


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

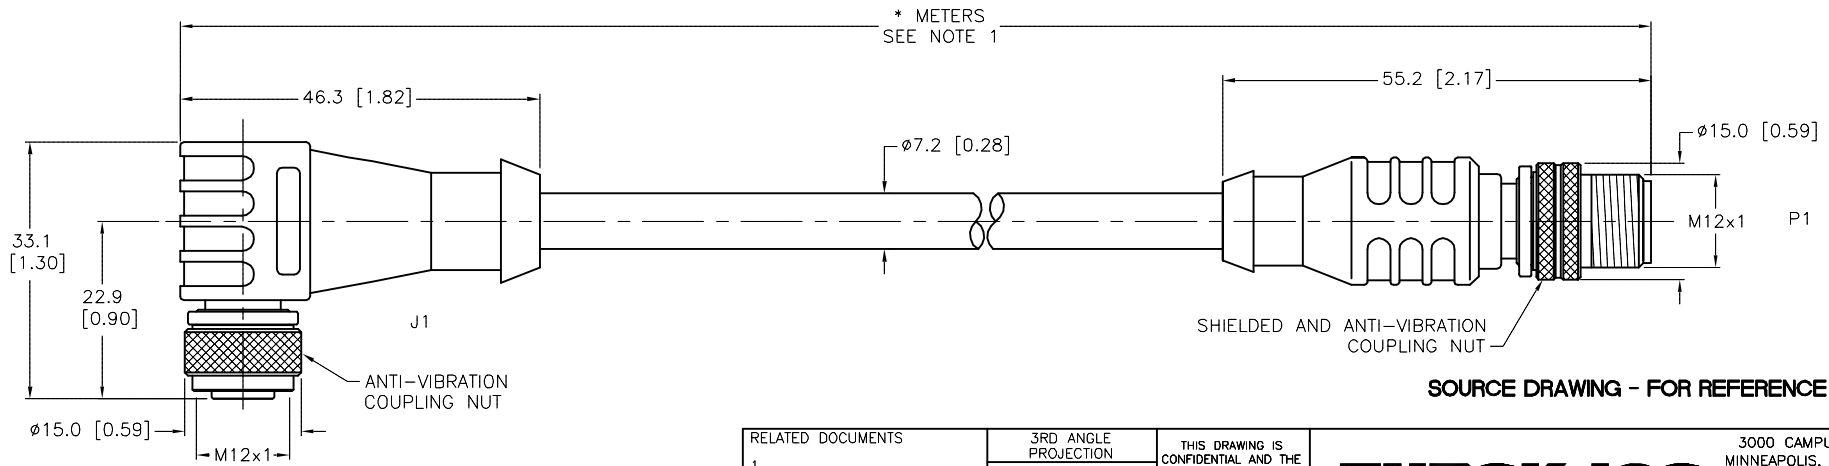

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:
1."*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK inc <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com		
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT PJ	DATE 03/17/06	DESCRIPTION E-WKC 8T-PX3-930-* -RSS 8T	
FINISH		APVD	SCALE 1=1.0	IDENTIFICATION NO.	
		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		REV D	
		FILE: 777012426		SHEET 1 OF 1	