
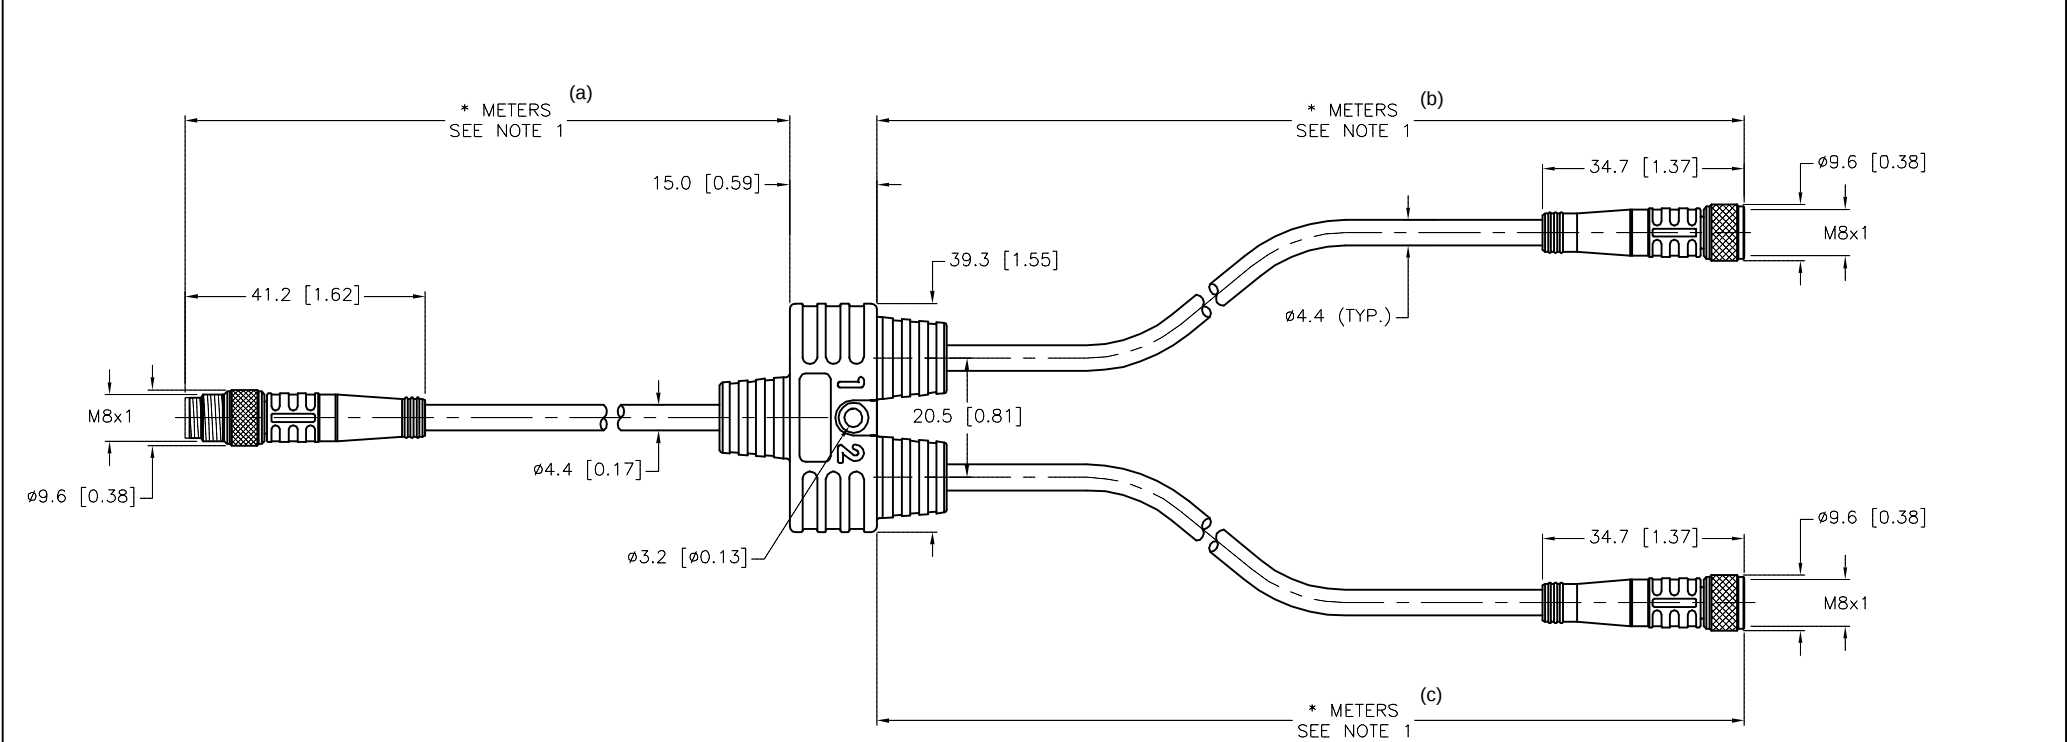


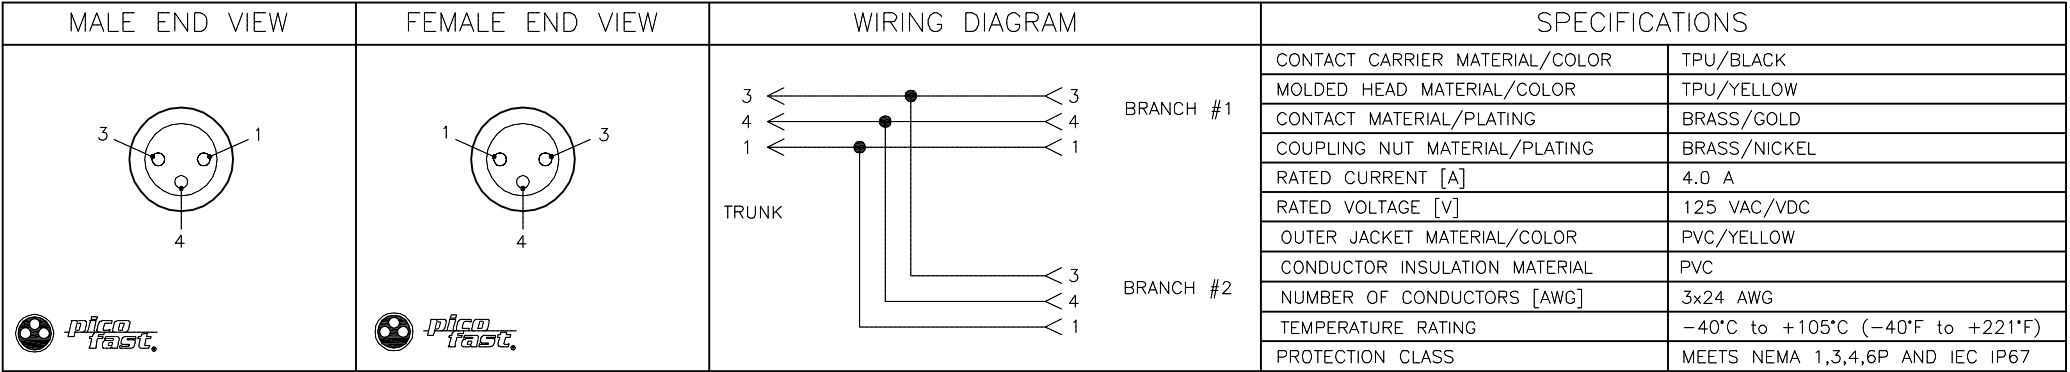

CABLE LENGTH		TOLERANCE *	
ALL LENGTHS		+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	
STRIP LENGTH		TOLERANCE *	
0-7mm		±0.5mm	
8-29mm		±1.0mm	
30-49mm		±2.0mm	
50-69mm		±3.0mm	
70-100mm		±4.0mm	
OVER 100mm		±5.0mm	
* UNLESS OTHERWISE SPECIFIED			

NOTES:

1. "M" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S651" DESIGNATES PARALLEL WIRING.


E	UPDATE MALE COUPLING NUT	RDS	05/13/13	40191
REV	DESCRIPTION	BY	DATE	ECO NO.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

1. 2. 3. 4.

3RD ANGLE PROJECTION



THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RDS

APVD

DATE 06/19/06

SCALE 1=1.3

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

TURCK INC
High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

DESCRIPTION

YBZ2-PSG3M-*/2PKG3M-*/*/S651

(a) (b) (c)

IDENTIFICATION NO.

REV

E

FILE: 777012765

SHEET 1 OF 1