
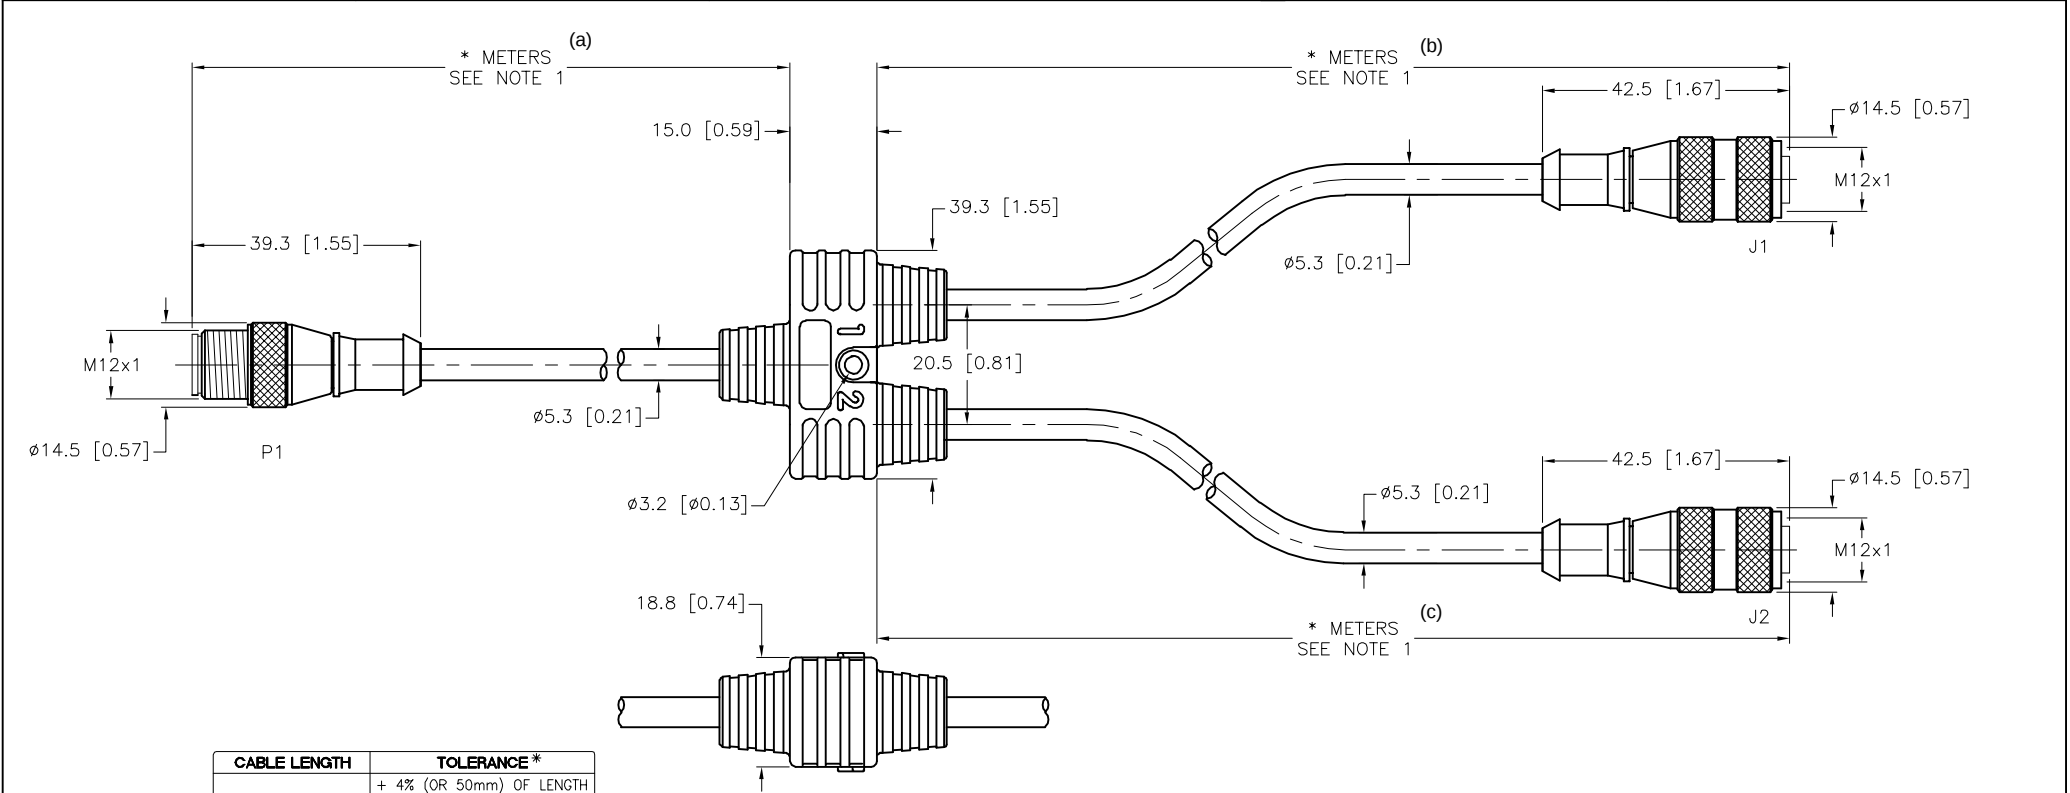


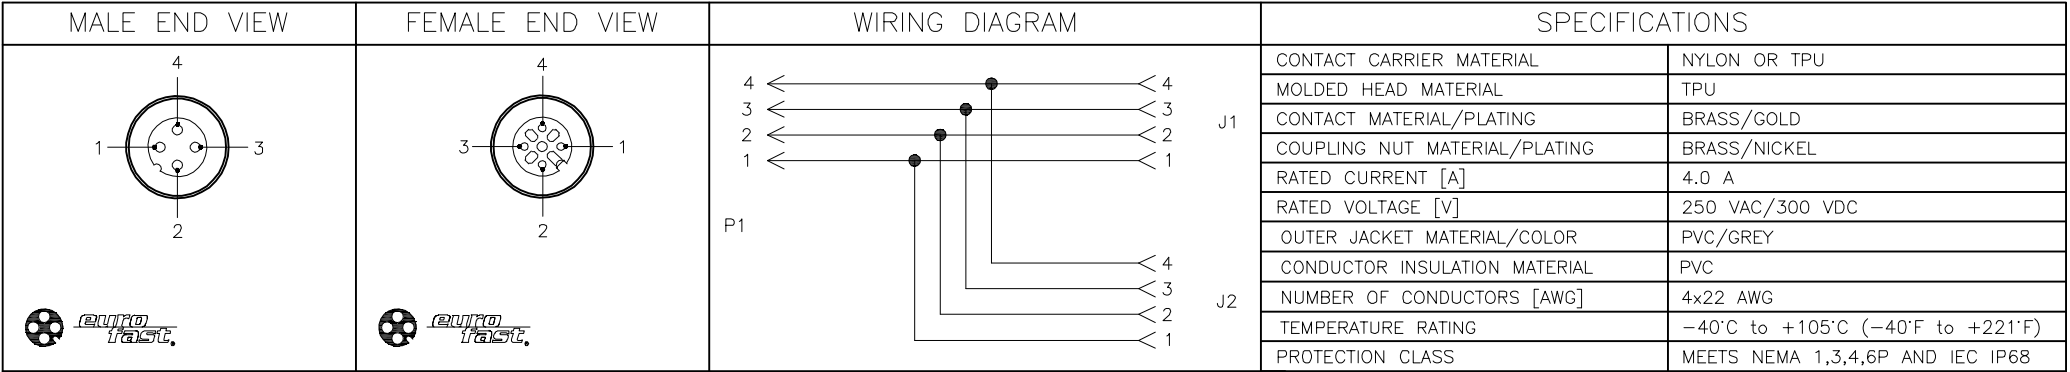

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S651" DESIGNATES PARALLEL WIRING.

F	UPDATE CABLE DIAMETER	KMY	04/10/12	37143
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
1.			
2.			
3.			
4.			
MATERIAL	SEE SPECIFICATIONS	DRFT RDS	DATE 06/19/06
FINISH	SEE SPECIFICATIONS	APVD	SCALE 1=1.3
		UNIT OF MEASUREMENT MILLIMETER [INCH]	
		DO NOT SCALE THIS DRAWING	
		DESCRIPTION YBZ2-RS4.4T-*/2RK4.4T-*/S651	
		IDENTIFICATION NO.	
		REV F	
		FILE: 777012773	
		SHEET 1 OF 1	