





SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	CuZn/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	35.0 A
RATED VOLTAGE [V]	600 V
CONDUCTOR INSULATION MATERIAL	PVC
NUMBERS OF CONDUCTORS [AWG]	4x8 AWG
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	IEC IP67
APPROVALS AND CERTIFICATIONS	UL 2237

MALE END VIEW	PANEL CUTOUT (TYPICAL)
 <p>GROUND CONNECTED TO HOUSING</p> <p>V = WHITE U = BLACK W = RED ⊕ = GREEN/YELLOW</p>	 <p>30.0 [1.18]</p> <p>30.0 [1.18]</p> <p>32.0±0.1 [Ø1.26±0.004]</p> <p>(4x) Ø4.2 [Ø0.17]</p>

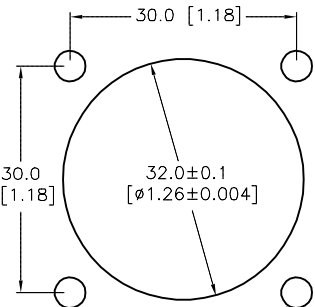

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

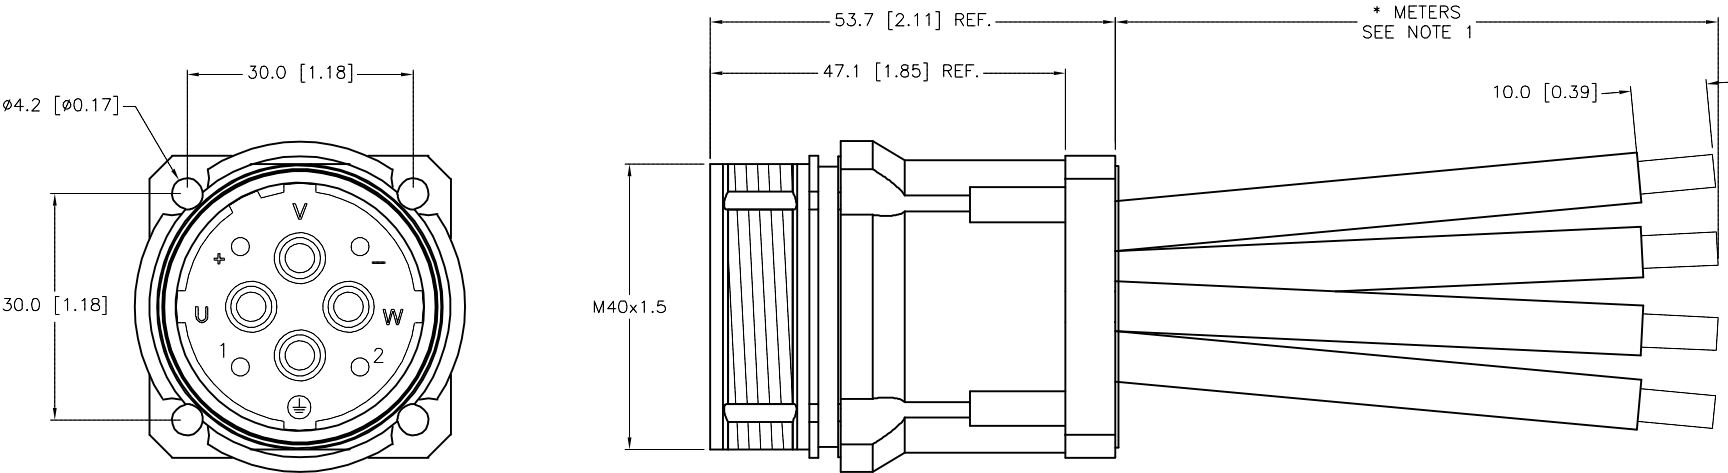


CAUTION:

RISK OF ELECTRICAL SHOCK

DO NOT DISCONNECT UNDER LOAD

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:				RELATED DOCUMENTS				3RD ANGLE PROJECTION				THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				TURCK				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. "*" INDICATES WIRE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.				1. 2. 3. 4.								DRFT				DATE 09/26/06				DESCRIPTION			
				MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY				PJ				SCALE 1=1.0				HSFF 4800-*			
				FINISH				CONTACT TURCK FOR MORE INFORMATION				UNIT OF MEASUREMENT				MILLIMETER [INCH]				IDENTIFICATION NO.			
												DO NOT SCALE THIS DRAWING								REV			
																				L			
																				FILE: 777013921			
																				SHEET 1 OF 1			