


CDECII				
SPECIFICATIONS				
CONTACT CARRIER MATERIAL	NYLON			
CONTACT MATERIAL/PLATING	CuZn/GOLD			
HOUSING MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	35.0 A			
RATED VOLTAGE [V]	600 V			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBERS OF CONDUCTORS [AWG]	4x8 AWG			
TEMPERATURE RATING	-40° C to $+105^{\circ}$ C (-40° F to $+221^{\circ}$ F)			
PROTECTION CLASS	IEC IP67			
APPROVALS AND CERITIFICATIONS	UL 2237			

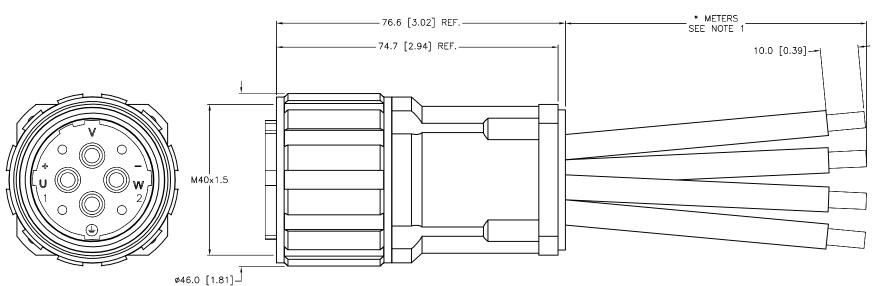

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGT - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE*			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* LINESS OTHERWISE SPECIFIED				

NOTES:

1. "*" INDICATES WIRE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

М	UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO	TV	09/18/17	62031
REV	DESCRIPTION	BY	DATE	ECO NO.

CAUTION: RISK OF ELECTRICAL SHOCK

DO NOT DISCONNECT UNDER LOAD

RELATED DOCUMENTS 3RD ANGLE PROJECTION 3000 CAMPUS DRIVE THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK MINNEAPOLIS, MN 55441 1-800-544-7769 INC. USE OF THIS DOCUMENT WITHOUT (763) 553-7300 3. (763) 553-0708 fax WRITTEN PERMISSION PROHIBITED. www.turck.us MATERIAL DATE 09/27/06 DESCRIPTION PLJ HKFMF 4800-* ALL DIMENSIONS APVD SCALE 1 = 1.0 DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY SEE SPECIFICATIONS UNIT OF MEASUREMENT IDENTIFICATION NO. REV FINISH MILLIMETER [INCH] CONTACT TURCK FOR MORE SEE SPECIFICATIONS INFORMATION FILE: 777013922 SHEET 1 OF 1 DO NOT SCALE THIS DRAWING

SOURCE DRAWING - FOR REFERENCE ONLY