

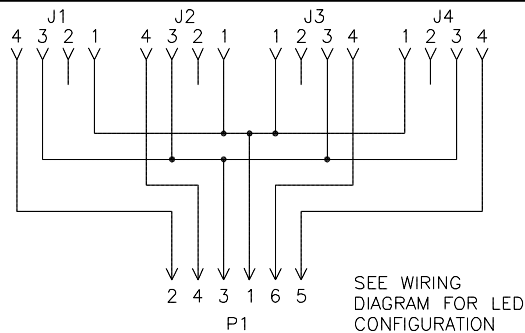







SPECIFICATIONS



CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW (P1), CLEAR (J1-J4)
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/FINISH	BRASS/NICKEL
RATED CURRENT [A]	2.0 A LOAD CURRENT/8 mA MAX. OP. (CURRENT AT 30 VDC SUPPLY VOLTAGE)
RATED VOLTAGE [V]	10-30 V
OUTER JACKET MATERIAL/COLOR	PVC/GREY (P1), YELLOW (J1-J4)
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTOR [AWG]	6x24 AWG (P1), 3x24 AWG (J1-J4)
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67


WIRING DIAGRAM FOR J1-J4

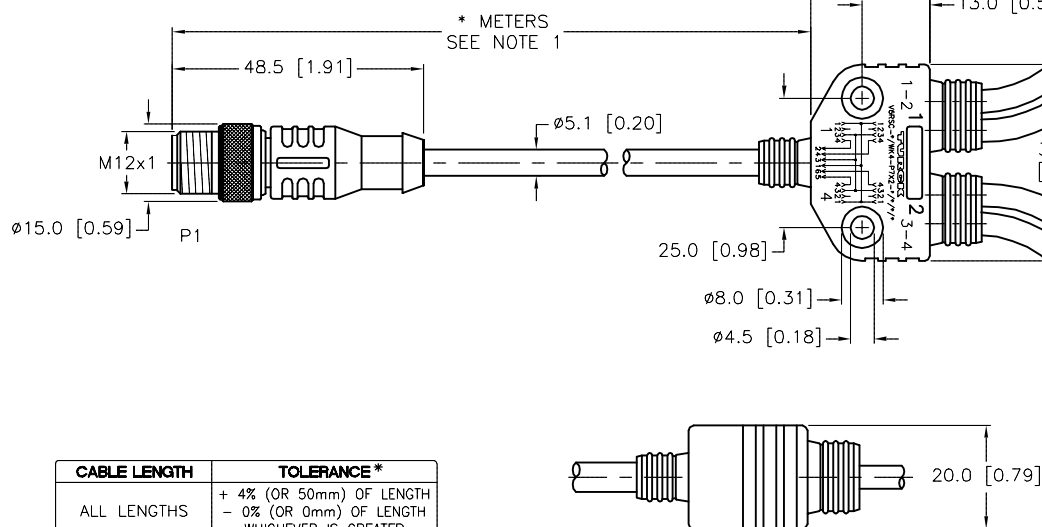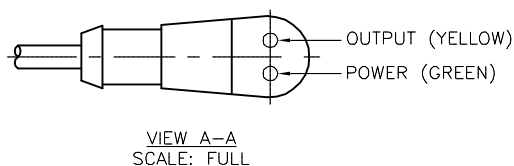


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

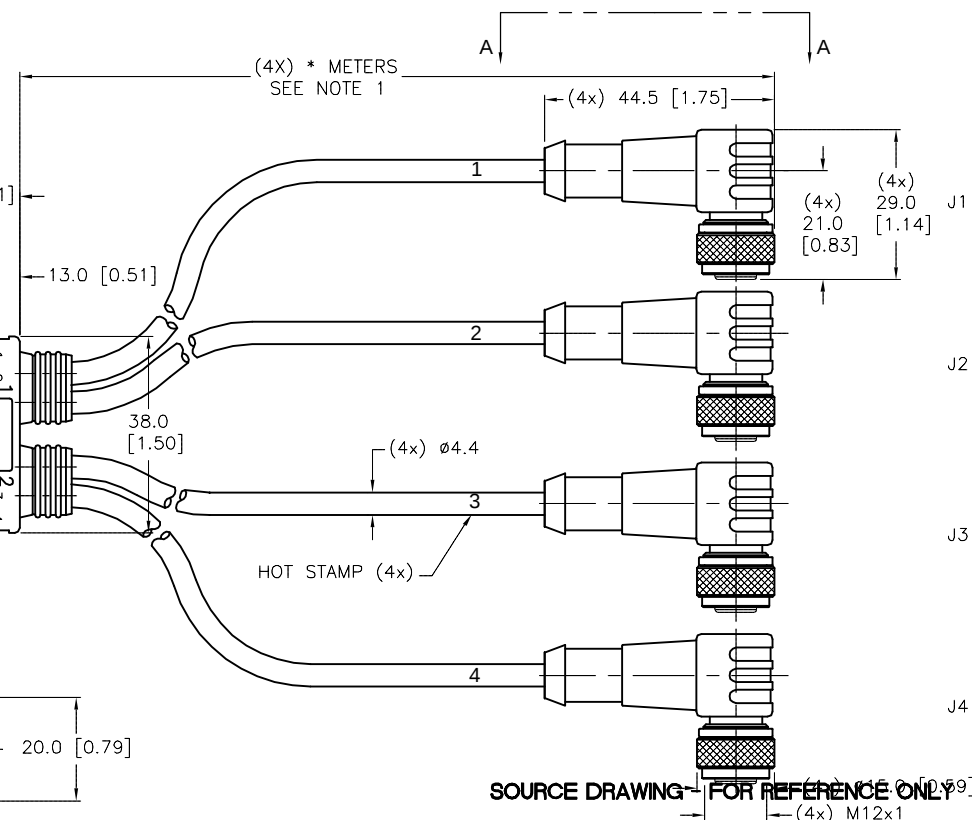

RELATED DOCUMENTS		3RD ANGLE PROJECTION				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							
MATERIAL		DRFT RWC		DATE 07/12/06		DESCRIPTION V6RSC-*/WK 4-P7X2-*/**/*	
SEE SPECIFICATIONS		APVD		SCALE 1=1.5			
FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. REV E	
SEE SPECIFICATIONS							
				FILE: 777013978		SHEET 1 OF 1	

E	UPDATE CABLE COLOR DESIGNATIONS	RDS	07/24/12	39470
REV	DESCRIPTION	BY	DATE	ECO NO.