


SPECIFICATIONS		
CONTACT CARRIER MATERIAL	NYLON OR TPU	
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY	
CONTACT MATERIAL/PLATING	BRASS/GOLD	
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	
RATED CURRENT [A]	4.0 A	
RATED VOLTAGE [V]	250 V	
OUTER CABLE JACKET MATERIAL/COLOR	TPU/GRAY	
CONDUCTOR INSULATION MATERIAL	PVC	
NUMBER OF CONDUCTORS [AWG]	5x22 AWG	
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)	
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K	

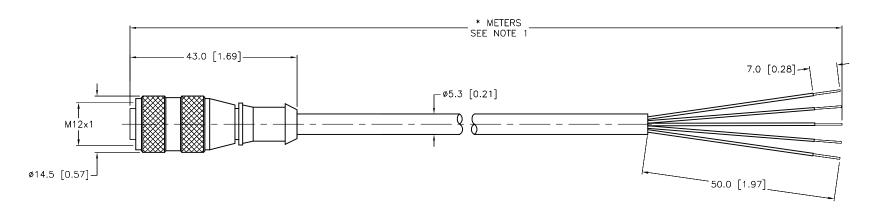

RELATED DOCUMENTS

2.

3. 4.

CABLE LENGTH	TOLERANCE*			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE*			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

## SOURCE DRAWING - FOR REFERENCE ONLY

## NOTES:

REV DESCRIPTION

- 1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. "/S90" DESIGNATES POLYURETHANE (TPU) CABLE JACKET.

UPDATE TEMPERATURE SPECIFICATION

		MATERIAL		
			SEE	SPECIFICATIONS
		FIN	ISH	
07/29/15	50958		SEE	SPECIFICATIONS
DATE	ECO NO.			

	<b>⊕</b> □	
ERIAL		
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	
SH		

3RD ANGLE PROJECTION

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

## turck iac

MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 High Technology Sensors and Automation Controls (763) 553-0708 fax turck.com

DATE 06/29/09 RDS SCALE 1=1.0 APVD UNIT OF MEASUREMENT

IDENTIFICATION NO.

MILLIMETER [ INCH ]

DO NOT SCALE THIS DRAWING

WAKW 4.5T-\*/S90

3000 CAMPUS DRIVE

REV

SHEET 1 OF 1

FILE: 777014015