




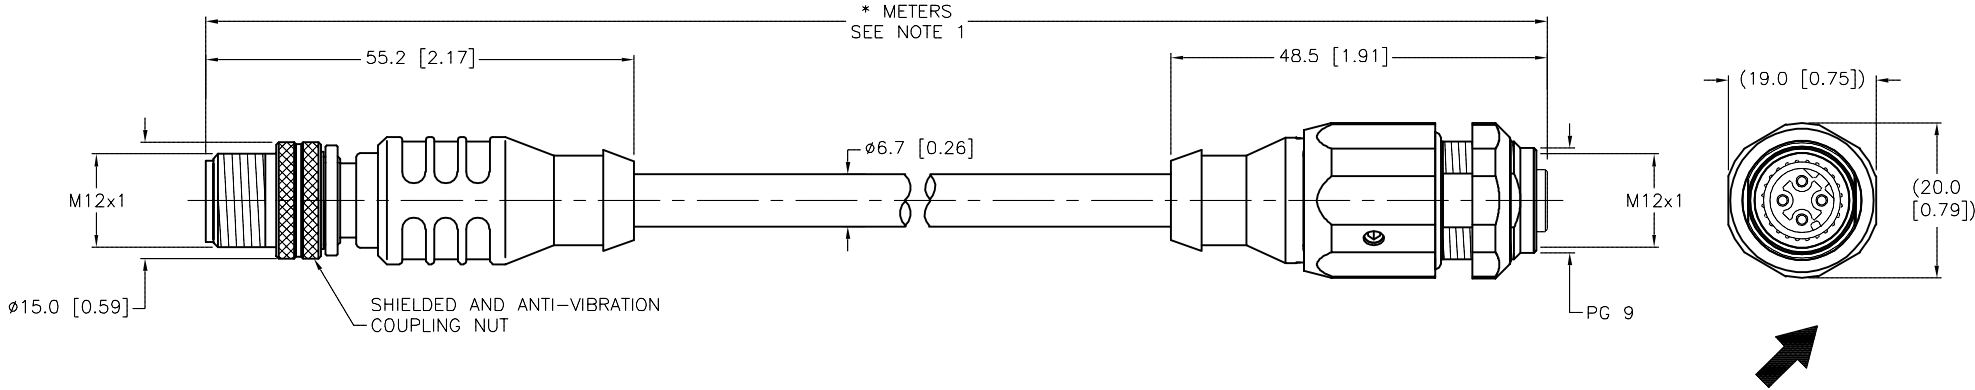



MALE END VIEW	FEMALE END VIEW	MOUNTING HOLE	SPECIFICATIONS																											
 1 = WHITE/ORANGE (+TX) 2 = WHITE/GREEN (+RX) 3 = ORANGE (-TX) 4 = GREEN (-RX) 	 1 = WHITE/ORANGE (+TX) 2 = WHITE/GREEN (+RX) 3 = ORANGE (-TX) 4 = GREEN (-RX) 		<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLUE-GRAY</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>240 V</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>TPE/TEAL</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>HDPE</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>2UTP×24 AWG, STRANDED CAT 5e</td></tr><tr><td>SHIELD</td><td>ALUM./POLYESTER FOIL AND TINNED COPPER BRAID</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +80°C (-40°F to +176°F)</td></tr><tr><td>PROTECTION CLASS</td><td>IP67</td></tr><tr><td>MAX. PANEL THICKNESS</td><td>5.5mm [0.216"]</td></tr></table>	CONTACT CARRIER MATERIAL	TPU	MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	240 V	OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL	CONDUCTOR INSULATION MATERIAL	HDPE	NUMBER OF CONDUCTORS [AWG]	2UTP×24 AWG, STRANDED CAT 5e	SHIELD	ALUM./POLYESTER FOIL AND TINNED COPPER BRAID	TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)	PROTECTION CLASS	IP67	MAX. PANEL THICKNESS	5.5mm [0.216"]	
CONTACT CARRIER MATERIAL	TPU																													
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY																													
CONTACT MATERIAL/PLATING	BRASS/GOLD																													
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																													
RATED CURRENT [A]	4.0 A																													
RATED VOLTAGE [V]	240 V																													
OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL																													
CONDUCTOR INSULATION MATERIAL	HDPE																													
NUMBER OF CONDUCTORS [AWG]	2UTP×24 AWG, STRANDED CAT 5e																													
SHIELD	ALUM./POLYESTER FOIL AND TINNED COPPER BRAID																													
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)																													
PROTECTION CLASS	IP67																													
MAX. PANEL THICKNESS	5.5mm [0.216"]																													

																			
<table><tr><th colspan="2">"441" RAW CABLE SPECIFICATIONS</th></tr><tr><td>CABLE PROPERTIES:</td><td>OIL, UV, WELD SLAG, AND ABRASION RESISTANT</td></tr><tr><td>VOLTAGE RATINGS (MAX):</td><td>600V</td></tr><tr><td>CATEGORY:</td><td>CAT 5e; (CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 90M LENGTH)</td></tr><tr><td>POE COMPLIANT (802.3af):</td><td>UP TO 80M LENGTH WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184</td></tr><tr><td>FLEXLIFE:</td><td>10X CABLE OD MIN: 1 MILLION CYCLES (TICK TOCK) 20X CABLE OD MIN: 10 MILLION CYCLES (TICK TOCK) TORSION TEST: 3 MILLION CYCLES (1lb LOAD, 360°-71 CYCLES/min)</td></tr><tr><td>APPROVALS:</td><td>C(UL)US CMX-OUTDOOR-CM LISTED, AWM RECOGNIZED COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES</td></tr></table>		"441" RAW CABLE SPECIFICATIONS		CABLE PROPERTIES:	OIL, UV, WELD SLAG, AND ABRASION RESISTANT	VOLTAGE RATINGS (MAX):	600V	CATEGORY:	CAT 5e; (CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 90M LENGTH)	POE COMPLIANT (802.3af):	UP TO 80M LENGTH WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184	FLEXLIFE:	10X CABLE OD MIN: 1 MILLION CYCLES (TICK TOCK) 20X CABLE OD MIN: 10 MILLION CYCLES (TICK TOCK) TORSION TEST: 3 MILLION CYCLES (1lb LOAD, 360°-71 CYCLES/min)	APPROVALS:	C(UL)US CMX-OUTDOOR-CM LISTED, AWM RECOGNIZED COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES				
"441" RAW CABLE SPECIFICATIONS																			
CABLE PROPERTIES:	OIL, UV, WELD SLAG, AND ABRASION RESISTANT																		
VOLTAGE RATINGS (MAX):	600V																		
CATEGORY:	CAT 5e; (CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 90M LENGTH)																		
POE COMPLIANT (802.3af):	UP TO 80M LENGTH WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184																		
FLEXLIFE:	10X CABLE OD MIN: 1 MILLION CYCLES (TICK TOCK) 20X CABLE OD MIN: 10 MILLION CYCLES (TICK TOCK) TORSION TEST: 3 MILLION CYCLES (1lb LOAD, 360°-71 CYCLES/min)																		
APPROVALS:	C(UL)US CMX-OUTDOOR-CM LISTED, AWM RECOGNIZED COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES																		
<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr></table> * UNLESS OTHERWISE SPECIFIED		CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm
CABLE LENGTH	TOLERANCE*																		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																		
STRIP LENGTH	TOLERANCE*																		
0-7mm	±0.5mm																		
8-29mm	±1.0mm																		
30-49mm	±2.0mm																		
50-69mm	±3.0mm																		
70-100mm	±4.0mm																		
OVER 100mm	±5.0mm																		
NOTES: 1. "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS																			
<table><tr><td>J</td><td>UPDATE CABLE DIAMETER</td><td>KMY</td><td>11/14/14</td><td>47778</td></tr><tr><td>REV</td><td>DESCRIPTION</td><td>BY</td><td>DATE</td><td>ECO NO.</td></tr></table>		J	UPDATE CABLE DIAMETER	KMY	11/14/14	47778	REV	DESCRIPTION	BY	DATE	ECO NO.								
J	UPDATE CABLE DIAMETER	KMY	11/14/14	47778															
REV	DESCRIPTION	BY	DATE	ECO NO.															

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT RDS		DATE 06/29/06	
MATERIAL				APVD		SCALE 1=1.0	
FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT		DESCRIPTION	
				MILLIMETER [INCH]		RSSD FKSD 441-*M	
		CONTACT TURCK FOR MORE INFORMATION				IDENTIFICATION NO.	
						REV	
				DO NOT SCALE THIS DRAWING		FILE: 777014063	
						SHEET 1 OF 1	