






FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GREY</p>	 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GREY</p>	CONTACT CARRIER MATERIAL	NYLON OR TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER CABLE JACKET MATERIAL/COLOR	TPU/GRAY
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	5x22 AWG
		TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68




SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

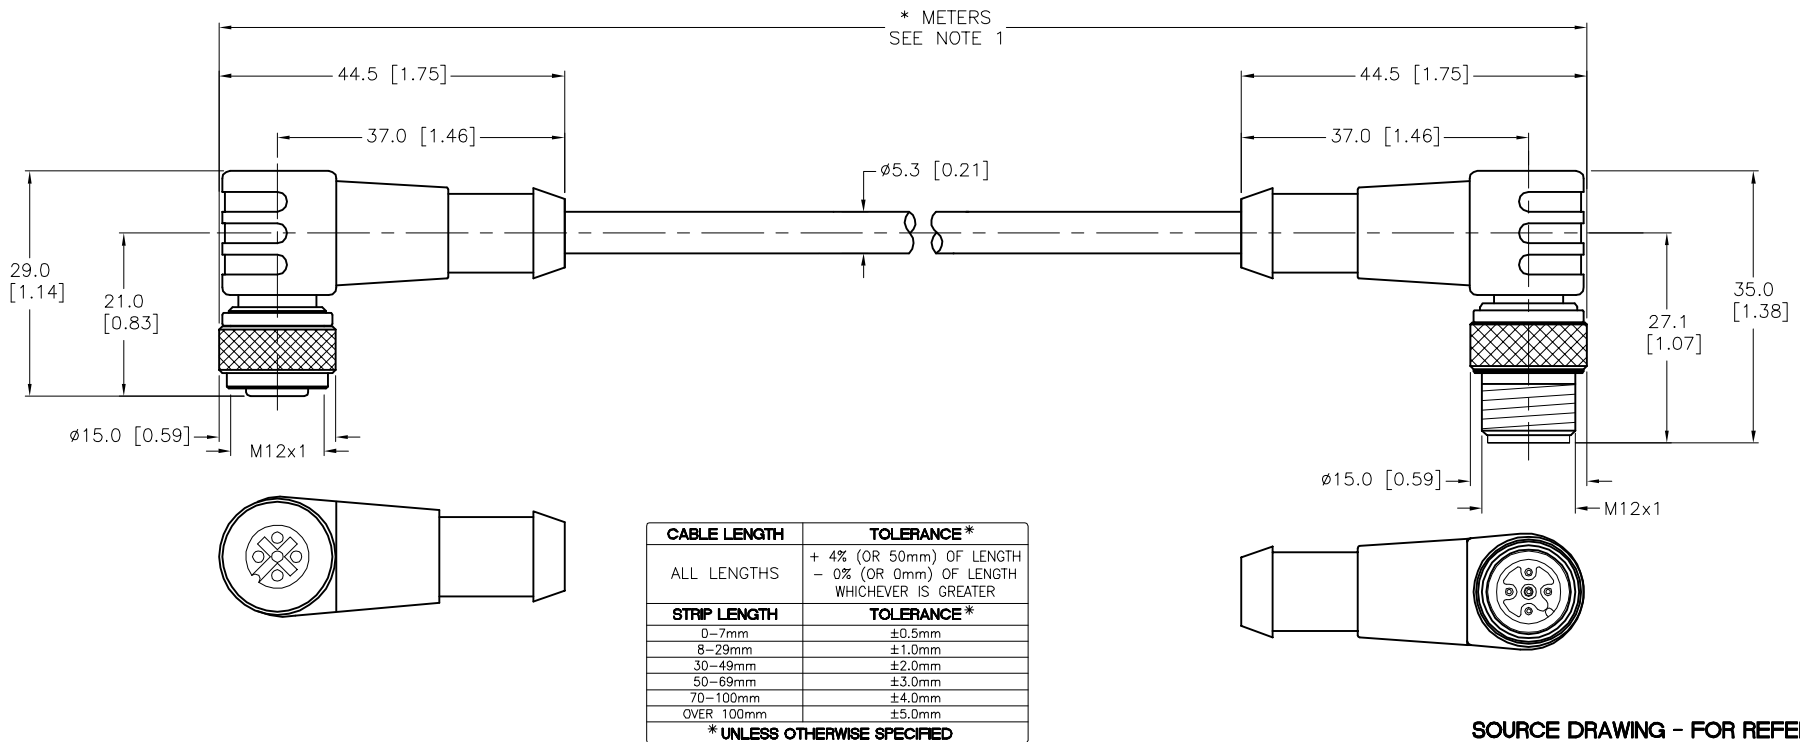- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE JACKET.
- "/S849" DESIGNATES 22 AWG CONDUCTORS.

H	UPDATED CONTACT CARRIER AND COUPLING NUT PER ECO	TV	04/21/16	54352
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.				DRFT RDS		DATE 08/14/06	
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.0	
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
FINISH		DO NOT SCALE THIS DRAWING		MILLIMETER [INCH]		WKC 4.5T-*--WSC 4.5T/S90/S849	
SEE SPECIFICATIONS						IDENTIFICATION NO.	
						REV	
						H	
						FILE: 777014104	
						SHEET 1 OF 1	