





FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = DRAIN		 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = DRAIN		CONTACT CARRIER MATERIAL	NYLON OR TPU
				MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	4.0 A
				RATED VOLTAGE [V]	250 V
				OUTER JACKET MATERIAL/COLOR	PVC/GRAY
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTORS [AWG]	4x22 AWG
				DRAIN/SHIELD	24 AWG DRAIN/ALUMI.-POLYESTER FOIL
				TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68

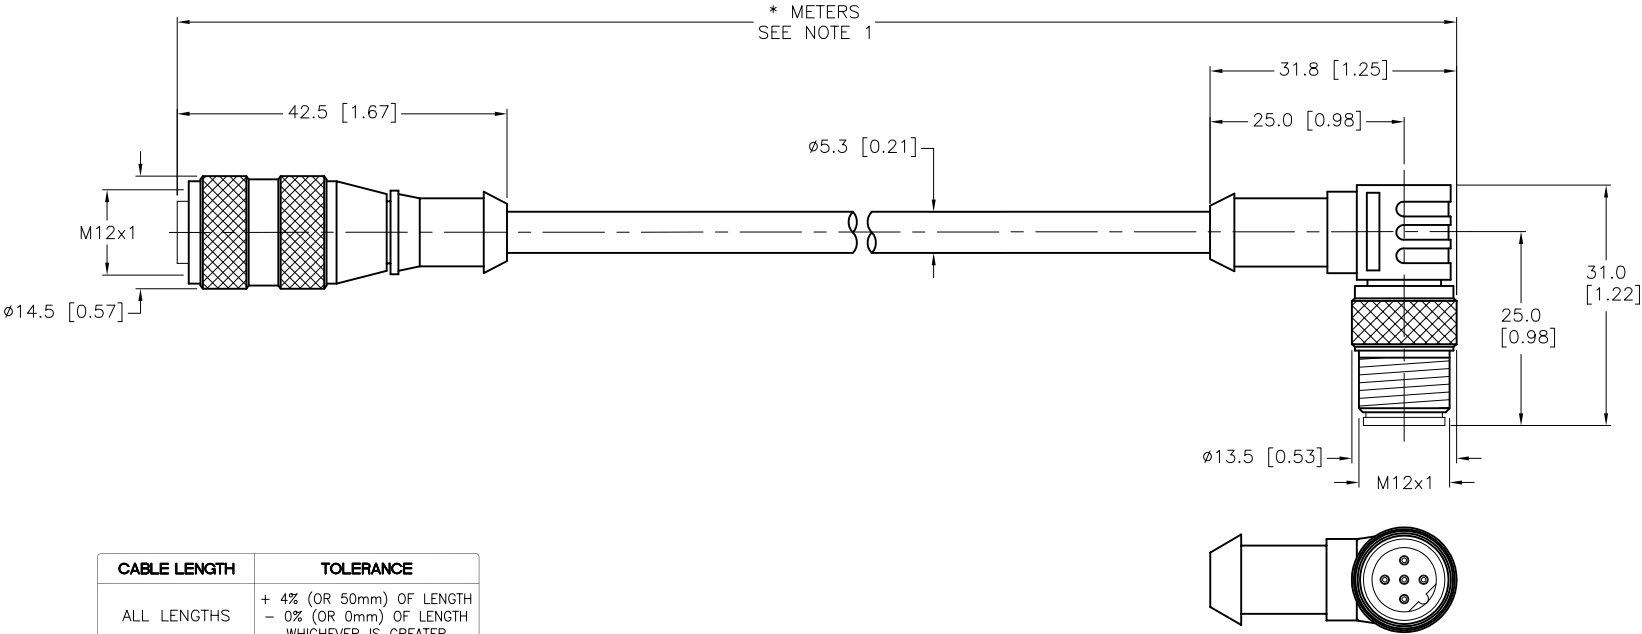

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

- NOTES:
- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 - "/S653" DESIGNATES CABLE WITH FOIL SHIELD AND DRAIN. DRAIN IS CONNECTED TO A PIN AT THE CONNECTORS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.					3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
MATERIAL SEE SPECIFICATIONS					DRFT MJM APVD		DATE 12/22/06 SCALE 1=1.0		DESCRIPTION WAKW 4.5T-*--WWASW 4.5T/S653	
FINISH SEE SPECIFICATIONS					UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV G	
G UPDATE CABLE DIAMETER REV DESCRIPTION					KMY 04/16/12 37153 BY DATE ECO NO.		DO NOT SCALE THIS DRAWING		FILE: 777014314 SHEET 1 OF 1	