



MALE END VIEW




- | | |
|------------------|-------------------|
| 1 = BROWN | 15 = BLUE |
| 2 = WHITE/GREY | 16 = BLACK/GREY |
| 3 = BLUE/GREY | 17 = BROWN/ORANGE |
| 4 = BROWN/GREY | 18 = WHITE/ORANGE |
| 5 = BLACK/YELLOW | 19 = BLACK/ORANGE |
| 6 = WHITE/YELLOW | 20 = BLACK/GREEN |
| 7 = BLUE/YELLOW | 21 = WHITE/GREEN |
| 8 = BROWN/YELLOW | 22 = BLUE/GREEN |
| 9 = BLACK/RED | 23 = BROWN/GREEN |
| 10 = WHITE/RED | 24 = BLUE/ORANGE |
| 11 = BLUE/RED | 25 = GREEN/YELLOW |
| 12 = BROWN/RED | 26 = N/C |
| 13 = BLACK | |
| 14 = WHITE | |
- DRAIN/SHIELD

FEMALE END VIEW



SPECIFICATIONS


CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
CONNECTOR HOUSING MATERIAL/PLATING	BRASS/NICKEL
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	25x22 AWG
DRAIN/SHIELD	22 AWG/ALUM.-POLYESTER FOIL
PROTECTION CLASS	IEC IP67
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)

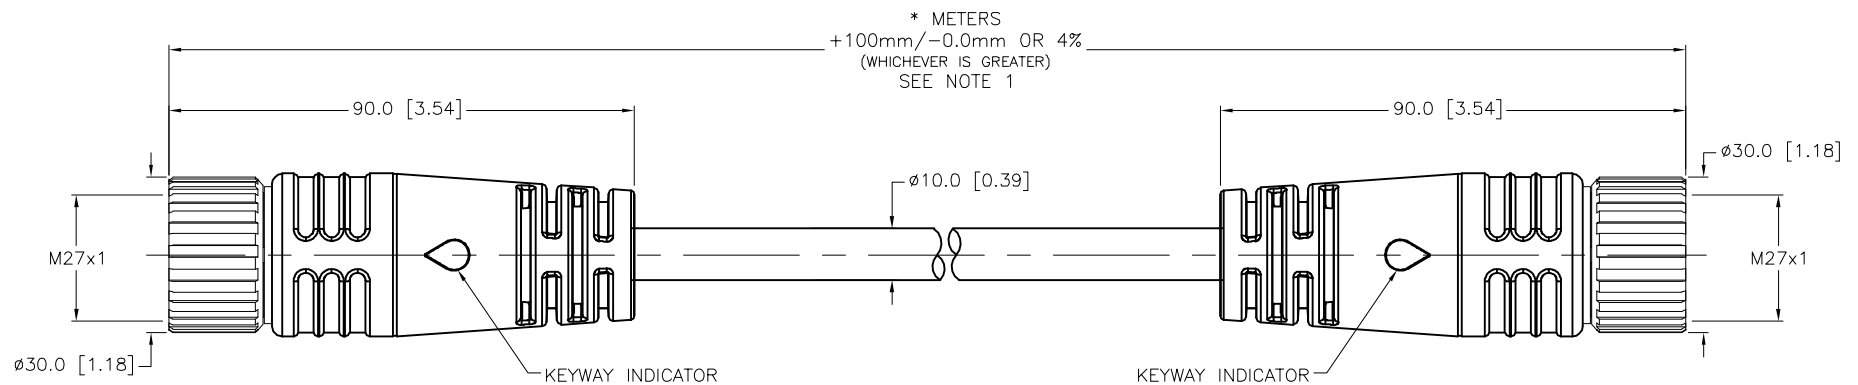

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1."*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div>	<div><div>TURCK</div><div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div></div>		
					
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT PJ	DATE 01/26/07	DESCRIPTION DSM DKM 26-631-*	
FINISH SEE SPECIFICATIONS		APVD	SCALE 1=1.5		
		UNIT OF MEASUREMENT MILLIMETER [INCH]	IDENTIFICATION NO.		REV D
		DO NOT SCALE THIS DRAWING	FILE: 777014877		SHEET 1 OF 1

D	UPDATE RATED CURRENT SPECIFICATIONS	KMY	12/26/13	44390
REV	DESCRIPTION	BY	DATE	ECO NO.