


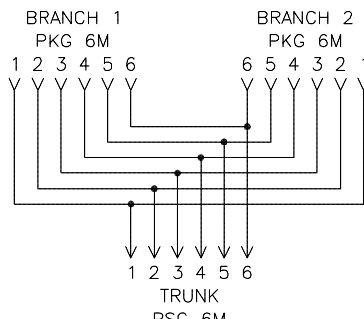


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS			
			CONTACT CARRIER MATERIAL/COLOR	TPU		
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW		
			CONTACT MATERIAL/PLATING	BRASS/GOLD		
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL		
			RATED CURRENT [A]	2.0 A		
			RATED VOLTAGE [V]	125 V		
			OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW		
			CONDUCTOR INSULATION MATERIAL	PVC		
			NUMBER OF CONDUCTORS [AWG]	6x26 AWG		
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)		
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67		

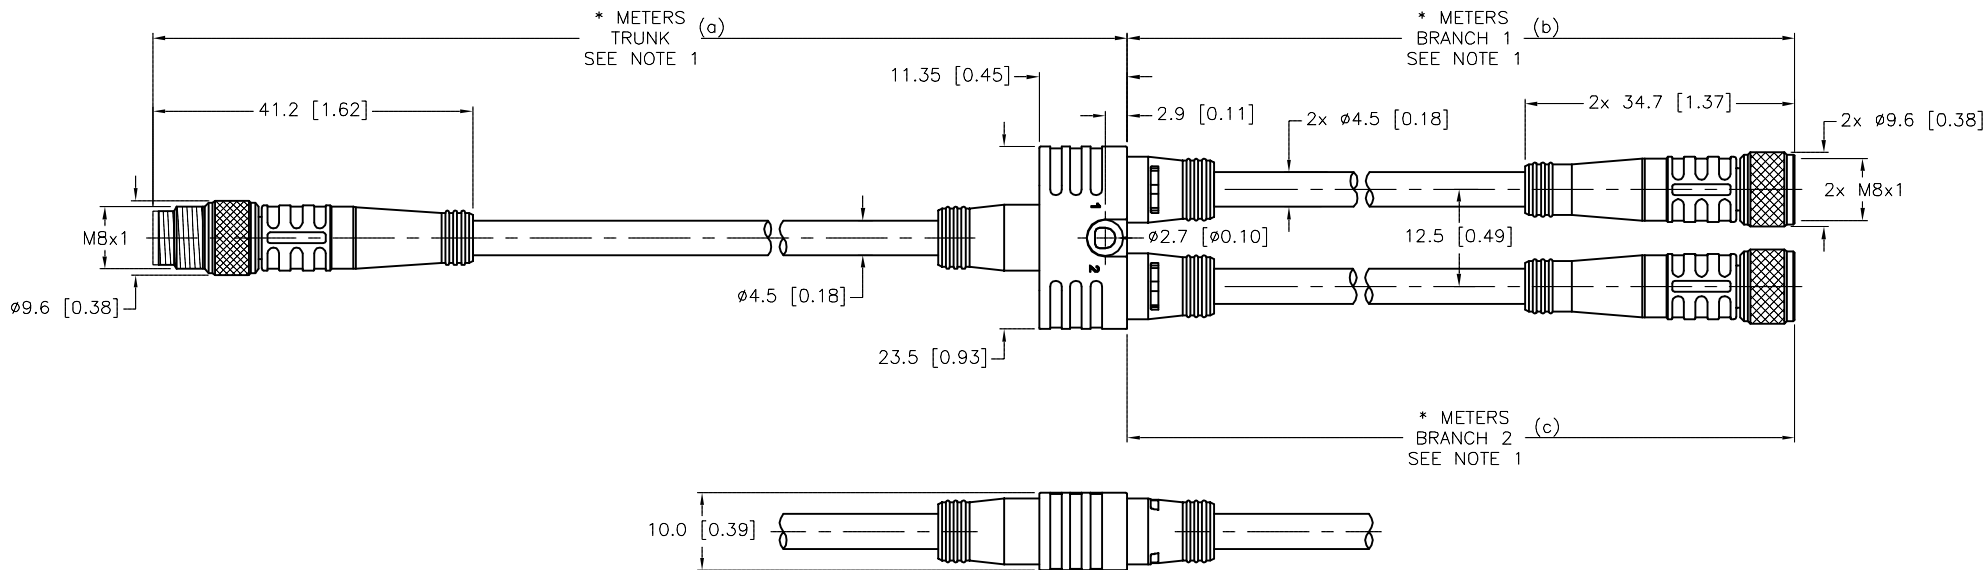


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S651" DESIGNATES PARALLEL WIRED VB2 OR JUNCTION BOX.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK INC <i>High Technology Sensors and Automation Controls</i>		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RWC	DATE	11/22/06			DESCRIPTION YP2-PSG6M-*/2PKG6M-*/*/S651 (a) (b)(c)
FINISH SEE SPECIFICATIONS		APVD		SCALE	1 = 1.0			
			UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.		
	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING			FILE: 777014956			SHEET 1 OF 1

F	UPDATE TO TPU CONTACT CARRIER	RDS	06/01/15	49046
REV	DESCRIPTION	BY	DATE	ECO NO.