


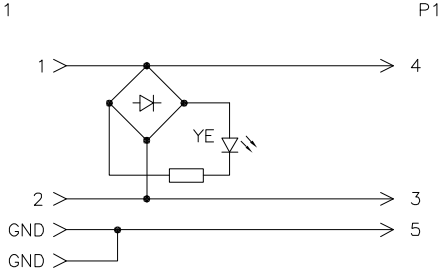



VALVE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS																							
 1 = BLACK #1 2 = BLACK #2 GND = GREEN/YELLOW	 1 = N/C 2 = N/C 3 = BLACK #2 4 = BLACK #1 5 = GREEN/YELLOW 		<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/TRANSLUCENT BLACK (J1), TPU/YELLOW (P1)</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/SILVER (J1), BRASS/GOLD (P1)</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL (P1)</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>24-48 VAC/VDC</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPU/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMER OF CONDUCTORS [AWG]</td><td>3x18 AWG</td></tr><tr><td>OPERATING TEMPERATURE</td><td>-40°C to 105°C (-40°F to 221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>	CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK (J1), TPU/YELLOW (P1)	CONTACT MATERIAL/PLATING	BRASS/SILVER (J1), BRASS/GOLD (P1)	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (P1)	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	24-48 VAC/VDC	OUTER JACKET MATERIAL/COLOR	TPU/GRAY	CONDUCTOR INSULATION MATERIAL	PVC	NUMER OF CONDUCTORS [AWG]	3x18 AWG	OPERATING TEMPERATURE	-40°C to 105°C (-40°F to 221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67	
CONTACT CARRIER MATERIAL	NYLON OR TPU																									
MOLDED HEAD MATERIAL/COLOR	TPU/TRANSLUCENT BLACK (J1), TPU/YELLOW (P1)																									
CONTACT MATERIAL/PLATING	BRASS/SILVER (J1), BRASS/GOLD (P1)																									
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL (P1)																									
RATED CURRENT [A]	4.0 A																									
RATED VOLTAGE [V]	24-48 VAC/VDC																									
OUTER JACKET MATERIAL/COLOR	TPU/GRAY																									
CONDUCTOR INSULATION MATERIAL	PVC																									
NUMER OF CONDUCTORS [AWG]	3x18 AWG																									
OPERATING TEMPERATURE	-40°C to 105°C (-40°F to 221°F)																									
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																									

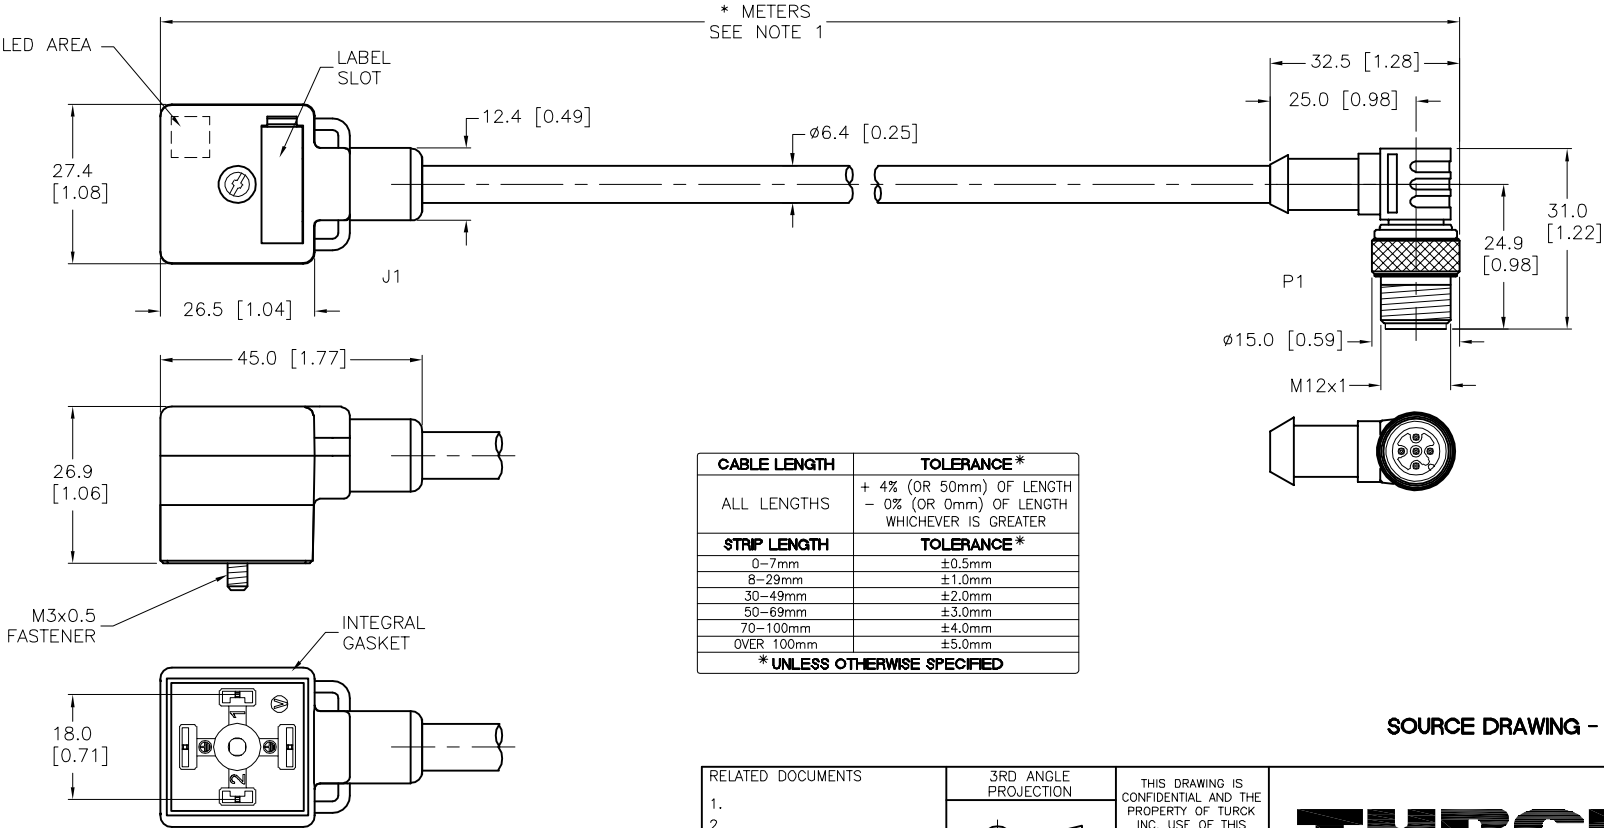

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.						DRFT KMY APVD A.A.		TURCK	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DATE 02/04/13		DESCRIPTION	
SEE SPECIFICATIONS				CONTACT TURCK FOR MORE INFORMATION		SCALE 1=1.3		VAS 22-B669-*M-WS 5.3T	
FINISH				UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
SEE SPECIFICATIONS				MILLIMETER [INCH]		FILE: 777015234		B	
DO NOT SCALE THIS DRAWING						SHEET 1 OF 1			

B	UPDATE COUPLING NUT	RDS	04/20/18	56903
REV	DESCRIPTION	BY	DATE	ECO NO.