




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS																							
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 	 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON OR TPU</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER CABLE JACKET MATERIAL/COLOR</td><td>PVC/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x22 AWG</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>MEETS NEMA 1,3,4,6P AND IEC IP67</td></tr></table>		CONTACT CARRIER MATERIAL	NYLON OR TPU	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	4x22 AWG	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
CONTACT CARRIER MATERIAL	NYLON OR TPU																								
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW																								
CONTACT MATERIAL/PLATING	BRASS/GOLD																								
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																								
RATED CURRENT [A]	4.0 A																								
RATED VOLTAGE [V]	250 V																								
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY																								
CONDUCTOR INSULATION MATERIAL	PVC																								
NUMBER OF CONDUCTORS [AWG]	4x22 AWG																								
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																								
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67																								

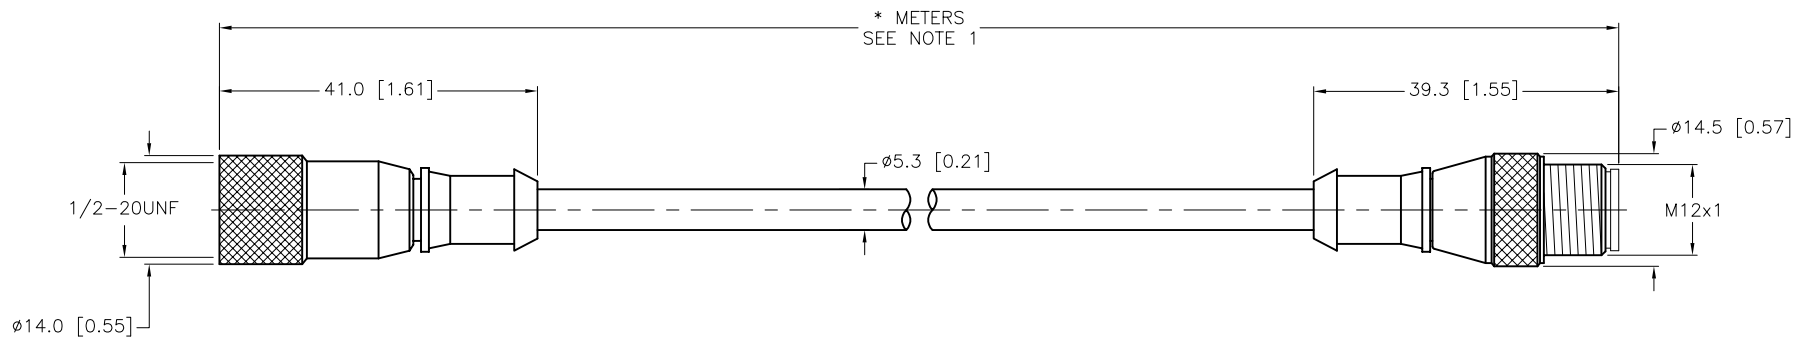

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

					70–100mm OVER 100mm		±4.0mm ±5.0mm														
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					RELATED DOCUMENTS		3RD ANGLE PROJECTION				THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com								
					1. 2. 3. 4.																
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		RWC		DATE		04/08/09		DESCRIPTION KB 4T-*—RS 4.4T				
					SEE SPECIFICATIONS				APVD				SCALE		1=1.0						
					FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV D								
					SEE SPECIFICATIONS																
D	UPDATE CABLE DIAMETER			KMY	03/29/12	37143															
REV	DESCRIPTION			BY	DATE	ECO NO.															
										DO NOT SCALE THIS DRAWING				FILE: 777015539				SHEET 1 OF 1			