




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 1 = RED/BLACK 2 = RED/WHITE 3 = RED 4 = GREEN/YELLOW 	 1 = RED/BLACK 2 = RED/WHITE 3 = RED 4 = GREEN/YELLOW 	CONTACT CARRIER MATERIAL	NYLON
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	4x22 AWG
		SHIELD	BRAIDED COPPER SHIELD
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K

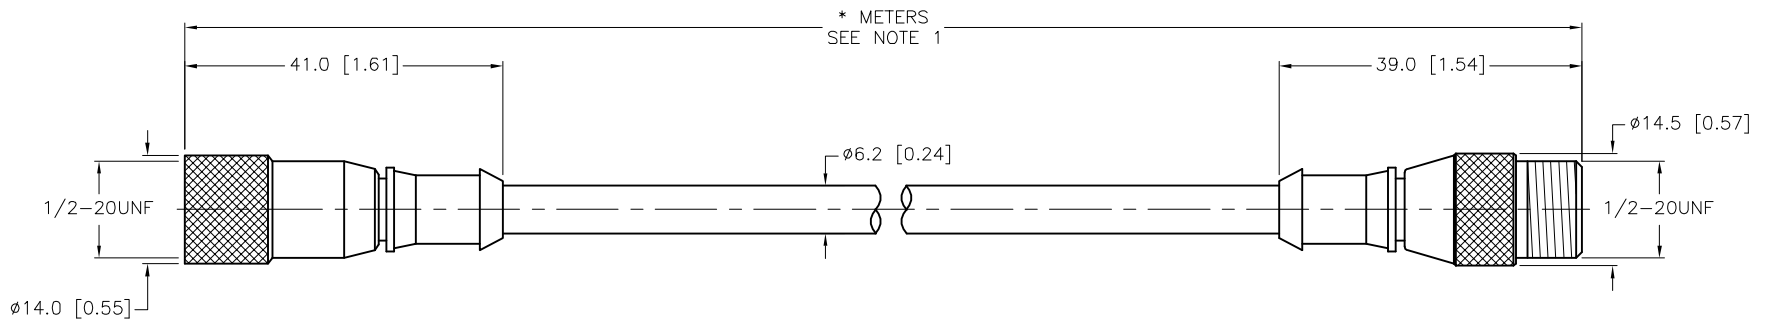


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S105" DESIGNATES PVC JACKET WITH BRAIDED SHIELD.

SOURCE DRAWING - FOR REFERENCE ONLY

E	UPDATE CONDUCTOR COLORS	NF	12/20/17	60915
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
1.						
2.						
3.						
4.						
MATERIAL		DRFT		DATE	DESCRIPTION KB 4T-*--SB 4T/S105	
		DJW		09/27/07		
		APVD		SCALE		
FINISH				1=1.0	IDENTIFICATION NO.	
						REV E
		UNIT OF MEASUREMENT				
		MILLIMETER [INCH]				
		DO NOT SCALE THIS DRAWING		FILE: 777015543		
				SHEET 1 OF 1		