




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS																									
																													
1 = RED/BLACK 2 = RED/WHITE 3 = RED 4 = GREEN/YELLOW		1 = RED/BLACK 2 = RED/WHITE 3 = RED 4 = GREEN/YELLOW																											
																													
				<table><tr><td>CONTACT CARRIER MATERIAL</td><td>NYLON</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/YELLOW</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/YELLOW</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>PVC</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>4x22 AWG</td></tr><tr><td>SHIELD</td><td>TINNED-COPPER BRAIDED</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +105°C (-40°F to +221°F)</td></tr><tr><td>PROTECTION CLASS</td><td>NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K</td></tr></table>		CONTACT CARRIER MATERIAL	NYLON	MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER JACKET MATERIAL/COLOR	PVC/YELLOW	CONDUCTOR INSULATION MATERIAL	PVC	NUMBER OF CONDUCTORS [AWG]	4x22 AWG	SHIELD	TINNED-COPPER BRAIDED	TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)	PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K
CONTACT CARRIER MATERIAL	NYLON																												
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW																												
CONTACT MATERIAL/PLATING	BRASS/GOLD																												
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																												
RATED CURRENT [A]	4.0 A																												
RATED VOLTAGE [V]	250 V																												
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW																												
CONDUCTOR INSULATION MATERIAL	PVC																												
NUMBER OF CONDUCTORS [AWG]	4x22 AWG																												
SHIELD	TINNED-COPPER BRAIDED																												
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)																												
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K																												

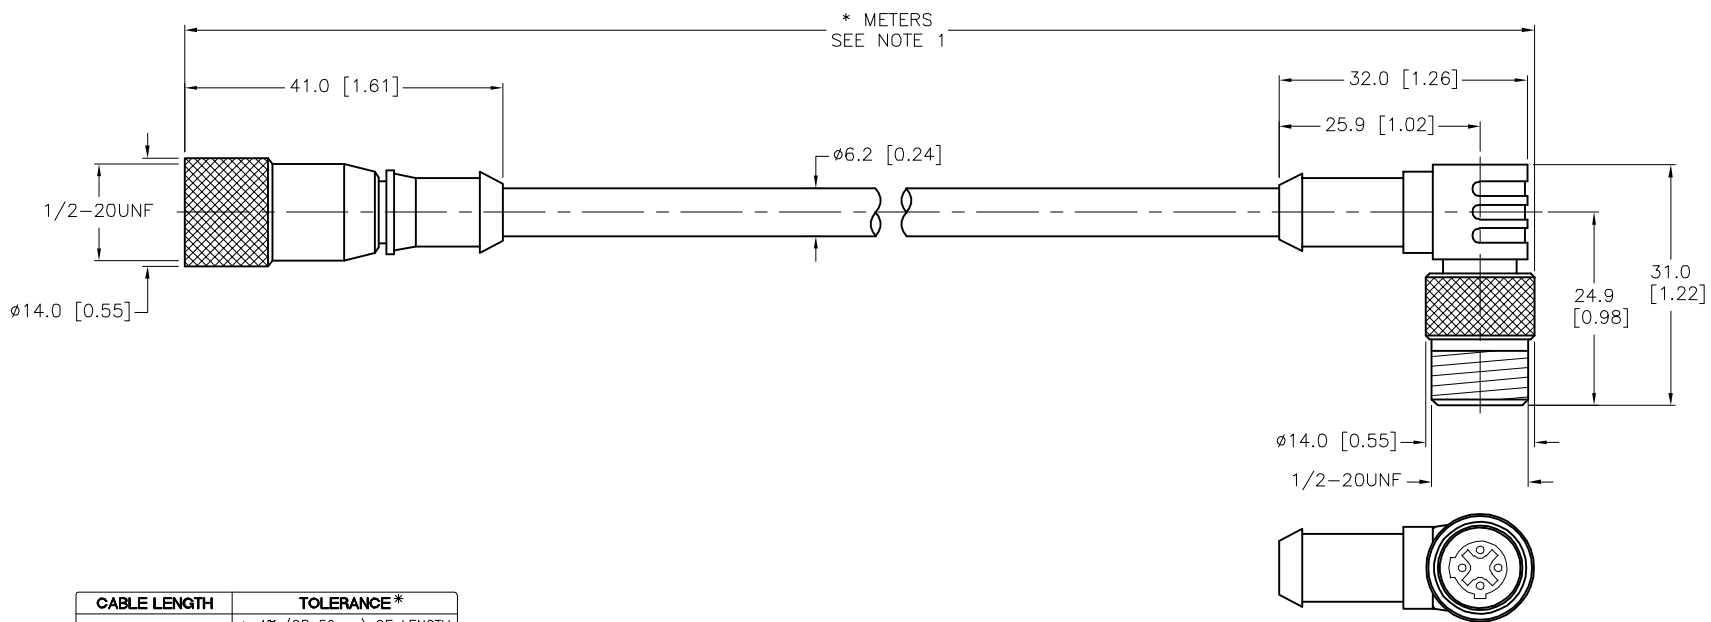


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

NOTES:

- "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S105 DESIGNATES PVC JACKET WITH BRAIDED SHIELD.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. 2. 3. 4.									
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		DATE		DESCRIPTION	
				DJW		09/28/07			
		CONTACT TURCK FOR MORE INFORMATION		APVD		SCALE		KB 4T-*--WSB 4T/S105	
						1=1.0			
FINISH				UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV	
				MILLIMETER [INCH]				E	
				DO NOT SCALE THIS DRAWING		FILE: 777015552		SHEET 1 OF 1	