



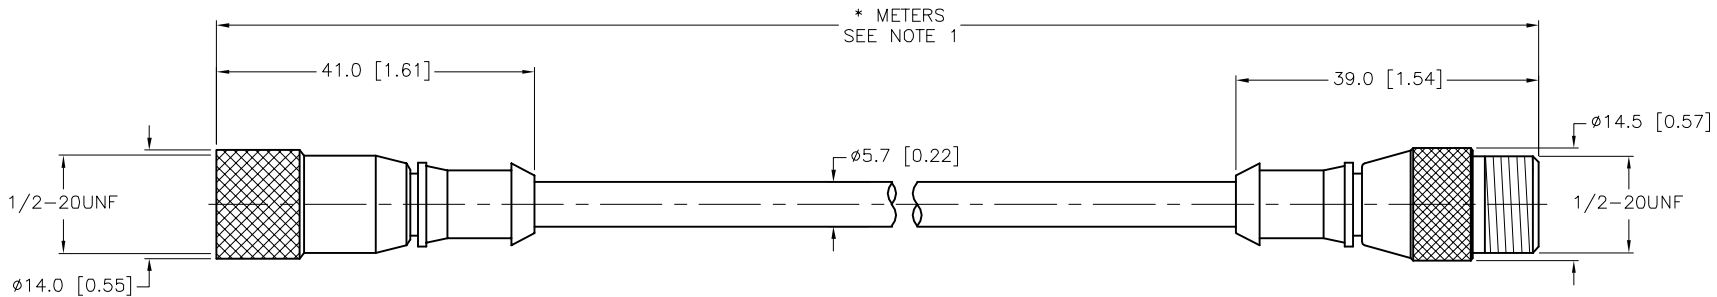


FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 <p> 1 = RED/WHITE  2 = RED  3 = GREEN/YELLOW  4 = RED/YELLOW  5 = RED/BLACK </p> 	 <p> 1 = RED/WHITE  2 = RED  3 = GREEN/YELLOW  4 = RED/YELLOW  5 = RED/BLACK </p> 	CONTACT CARRIER MATERIAL MOLDED HEAD MATERIAL/COLOR CONTACT MATERIAL/PLATING COUPLING NUT MATERIAL/FINISH RATED CURRENT [A] RATED VOLTAGE [V] OUTER JACKET MATERIAL/COLOR CONDUCTOR INSULATION MATERIAL NUMBER OF CONDUCTORS [AWG] TEMPERATURE RATING PROTECTION CLASS	NYLON TPU/YELLOW BRASS/GOLD STAINLESS STEEL/PASSIVATED 4.0 A 250 V PVC/YELLOW PVC 5x22 AWG -40°C to +105°C (-40°F to +221°F) NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K



CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
*UNLESS OTHERWISE SPECIFIED	

#### NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

70-100mm		±4.0mm
OVER 100mm		±5.0mm
* UNLESS OTHERWISE SPECIFIED		

NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

D	UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO	TV	09/11/17	60913
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
		1.	2.			3.	4.	
MATERIAL		DRFT	DJW	DATE	10/03/07	DESCRIPTION  KBV 5T-*--SBV 5T		
SEE SPECIFICATIONS		APVD		SCALE	1=1.0			
FINISH		UNIT OF MEASUREMENT  MILLIMETER [ INCH ]				IDENTIFICATION NO.		REV  D
SEE SPECIFICATIONS		CONTACT TURCK FOR MORE INFORMATION				FILE: 777015587		SHEET 1 OF 1
		DO NOT SCALE THIS DRAWING						