


SPECIFICATIONS				
CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
HOUSING MATERIAL/PLATING	BRASS/NICKEL			
O-RING MATERIAL	FKM/FPM			
RATED CURRENT [A]	4.0 A			
RATED VOLTAGE [V]	125 VAC/VDC			
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	3x24 AWG			
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67			

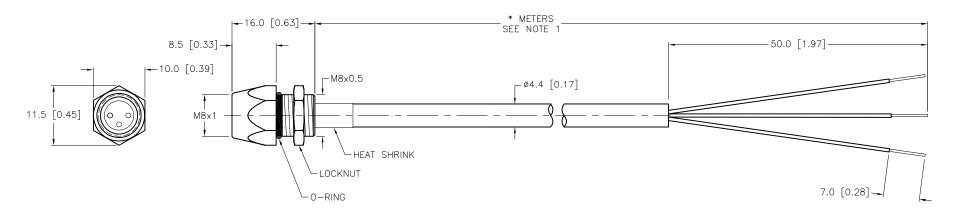

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

NOTES:

- 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- 2. $\ensuremath{^{\prime\prime}}\xspace/\text{STS}$ Designates receptable assembled with standard cordset PVC cable.

					ľ
В	UPDATED SEALING RING MATERIAL PER ECO	TV	08/11/16	56141	ĺ
REV	DESCRIPTION	BY	DATE	ECO NO.	

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	_	IRCK 1- (7 (7	O CAMPUS APOLIS, MN 800-544- 63) 553-7 63) 553-0 www.turck.	N 55441 7769 7300)708 fax
MATERIAL	ALL DIMENSIONS	DRFT CK	DATE 06/24/11 SCALE 1=.8	DESCRIPTION MFKS 3-*/S7	17	
SEE SPECIFICATIONS	DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME		IDENTIFICATION NO.		REV
FINISH	CONTACT TURCK FOR MORE	MILLIMETE	ER [INCH]	IDENTIFICATION NO.		В
SEE SPECIFICATIONS	INFORMATION	DO NOT SCALE THIS DRAWING		FILE: 777015593	SHEET	1 OF 1