

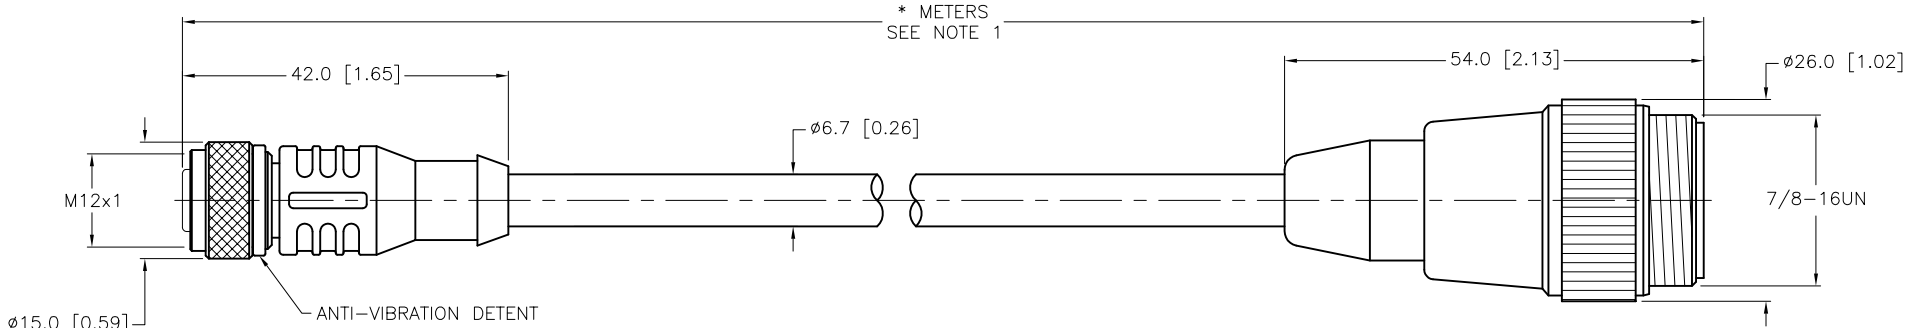



FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK</p>	 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK</p>	CONTACT CARRIER MATERIAL	NYLON OR TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	4x18 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

		<div> <div> <div>CABLE LENGTH</div> <div>TOLERANCE</div> </div> <div> <div>ALL LENGTHS</div> <div>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</div> </div> <div> <div>STRIP LENGTH</div> <div>TOLERANCE</div> </div> <div> <div>0-7mm</div> <div>±0.5mm</div> </div> <div> <div>8-29mm</div> <div>±1.0mm</div> </div> <div> <div>30-49mm</div> <div>±2.0mm</div> </div> <div> <div>50-69mm</div> <div>±3.0mm</div> </div> <div> <div>70-100mm</div> <div>±4.0mm</div> </div> <div> <div>OVER 100mm</div> <div>±5.0mm</div> </div> </div>		<div> <div>RELATED DOCUMENTS</div> <div> <div>1.</div> <div>2.</div> <div>3.</div> <div>4.</div> </div> <div>MATERIAL</div> <div>SEE SPECIFICATIONS</div> <div>FINISH</div> <div>SEE SPECIFICATIONS</div> </div> <div> <div>3RD ANGLE PROJECTION</div> <div>  </div> <div>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</div> <div>CONTACT TURCK FOR MORE INFORMATION</div> </div> <div> <div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div>DRFT</div> <div>RWC</div> <div>DATE</div> <div>05/15/07</div> <div>APVD</div> <div>SCALE</div> <div>1=1.0</div> <div>UNIT OF MEASUREMENT</div> <div>MILLIMETER [ INCH ]</div> <div>DO NOT SCALE THIS DRAWING</div> </div> <div> <div> <div> <div>3000 CAMPUS DRIVE</div> <div>MINNEAPOLIS, MN 55441</div> <div>1-800-544-7769</div> <div>(763) 553-7300</div> <div>(763) 553-0708 fax</div> <div>turck.com</div> </div> <div> <div>TURCK INC</div> <div>High Technology Sensors and Automation Controls</div> </div> </div> <div> <div>DESCRIPTION</div> <div>RKC 4.4T-*--RSM 40</div> <div>IDENTIFICATION NO.</div> <div>777015706</div> <div>REV</div> <div>D</div> </div> </div> <div> <div> <div>D</div> <div>UPDATE CABLE DIAMETER</div> <div>RDS</div> <div>05/07/12</div> <div>37149</div> </div> <div> <div>REV</div> <div>DESCRIPTION</div> <div>BY</div> <div>DATE</div> <div>ECO NO.</div> </div> </div>	
--	--	--	--	--	--

NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.