



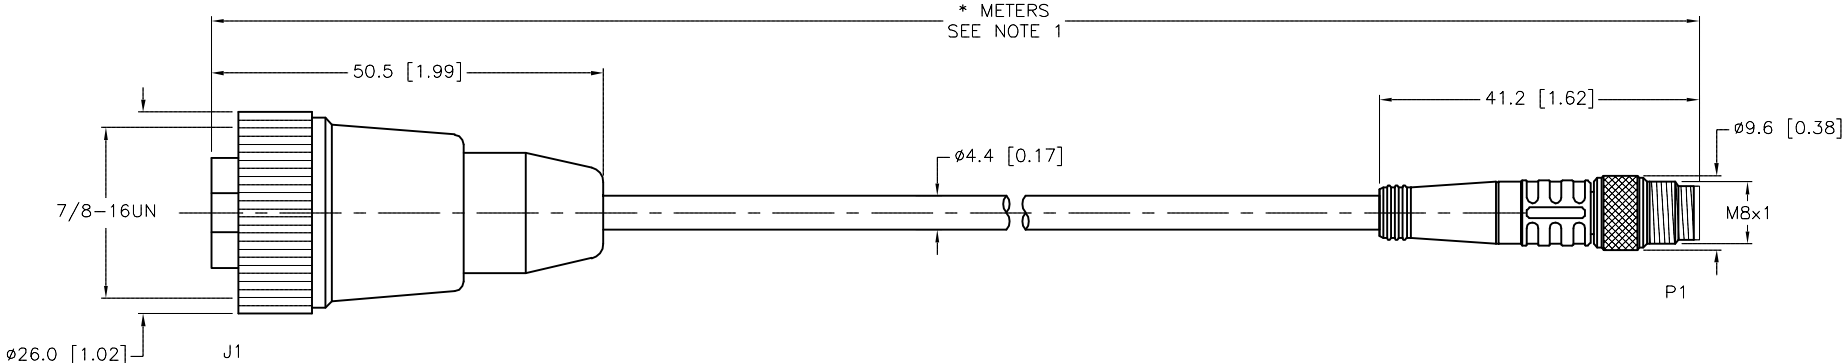



FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK</p> 	 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK</p> 	<p>J1 P1</p> <p>1 >—————> 1 2 >—————> 2 3 >—————> 3 4 >—————> 4</p>	CONTACT CARRIER MATERIAL	TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	2.0 A
			RATED VOLTAGE [V]	125 VAC/VDC
			OUTER CABLE JACKET MATERIAL/COLOR	PVC/YELLOW
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	4x26 AWG
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

																						
<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr></table> <p>* UNLESS OTHERWISE SPECIFIED</p>		CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm			
CABLE LENGTH	TOLERANCE*																					
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																					
STRIP LENGTH	TOLERANCE*																					
0-7mm	±0.5mm																					
8-29mm	±1.0mm																					
30-49mm	±2.0mm																					
50-69mm	±3.0mm																					
70-100mm	±4.0mm																					
OVER 100mm	±5.0mm																					
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.																						
<div><div><div>RELATED DOCUMENTS</div><div><div>1.</div><div>2.</div><div>3.</div><div>4.</div></div></div><div><div>3RD ANGLE PROJECTION</div><div></div></div><div><div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div><div><div>DRFT</div><div>RDS</div></div><div><div>DATE</div><div>06/19/17</div></div></div><div><div>MATERIAL</div><div>SEE SPECIFICATIONS</div></div><div><div>FINISH</div><div>SEE SPECIFICATIONS</div></div><div><div>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</div><div>CONTACT TURCK FOR MORE INFORMATION</div></div><div><div>UNIT OF MEASUREMENT</div><div>MILLIMETER [INCH]</div></div><div><div>DO NOT SCALE THIS DRAWING</div></div><div><div>DESCRIPTION</div><div>RKM 40-* -PSG 4M</div></div><div><div>IDENTIFICATION NO.</div><div>777015729</div></div><div><div>REV</div><div>A</div></div><div><div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div></div></div>																						
A	DRAWING RELEASE	NF	06/23/17																			
REV	DESCRIPTION	BY	DATE	ECO NO.																		