


SPECIFICATIONS						
CONTACT CARRIER MATERIAL	TPU OR NYLON					
MOLDED MATERIAL/COLOR	TPU/YELLOW					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL					
RATED CURRENT [A]	4.0 A					
RATED VOLTAGE [V]	250 V					
OUTER JACKET MATERIAL/COLOR	PVC/GRAY					
CONDUCTOR INSULATION MATERIAL	PVC					
NUMBER OF CONDUCTORS [AWG]	5x22					
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)					
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67					

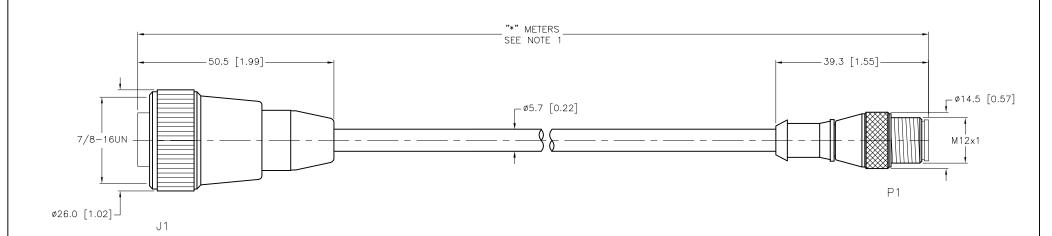

RELATED DOCUMENTS

2.

3.

CABLE LENGTH	TOLERANCE *						
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER						
STRIP LENGTH	TOLERANCE *						
0-7mm	±0.5mm						
8-29mm	±1.0mm						
30-49mm	±2.0mm						
50-69mm	±3.0mm						
70-100mm	±4.0mm						
OVER 100mm	±5.0mm						
* UNLESS OTHERWISE SPECIFIED							

NOTES:

DRAWING RELEASE DESCRIPTION

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

LENGTH IN METERS. CONTACT TURCK TO ORDER											
ELNOTT IN METERS. SONTAGE TORON TO SUBER		MATERIAL			RDS	DATE 02/21/11	DESCRIPTION	4 5T			
		SEE SPECIFICATIONS	DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK	APVD		SCALE 1=1.0		RKM 50-*-RS	+.01		
				UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.			REV	
		FINISH					1021111110111011			Δ	
RD	S 02/21/11		SEE SPECIFICATIONS	FOR MORE INFORMATION							/_\
BY	DATE	ECO NO.			DO	NOT SCALE	THIS DRAWING	FILE: 77701	5740	SHEET	1 OF 1

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS

DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

SOURCE DRAWING - FOR REFERENCE ONLY

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769

(763) 553-7300

(763) 553-0708 fax www.turck.us