


SPECIFICATIONS			
CONTACT CARRIER MATERIAL	NYLON		
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW		
CONTACT MATERIAL/PLATING	BRASS/GOLD		
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED		
RATED CURRENT [A]	4.0 A		
RATED VOLTAGE [V]	250 V		
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW		
CONDUCTOR INSULATION MATERIAL	PVC		
NUMBER OF CONDUCTORS [AWG]	4×22 AWG		
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)		
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP67, IP68, IP69K		

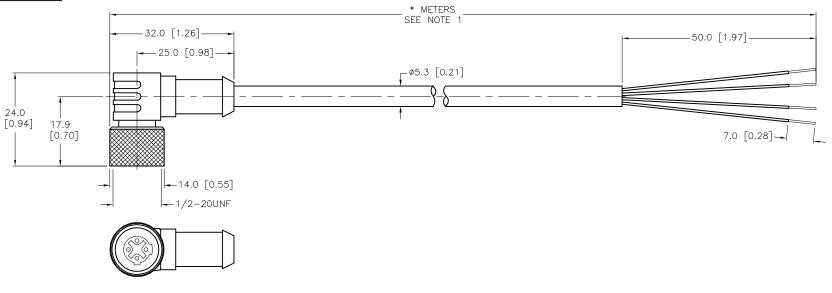

CABLE LENGTH	TOLERANCE*			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE*			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

TV 08/18/17

DATE

60844

ECO NO.

NOTES:

REV DESCRIPTION

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

UPDATED GRN CONDUCTOR TO GRN/YEL PER ECO

3. 4.		WR
MATERIAL		DF
SEE SPECIFCATIONS	ALL DIMENSIONS DISPLAYED ON THIS	ΑP
	DRAWING ARE FOR REFERENCE ONLY	
FINISH	CONTACT TURCK	
SEE SPECIFICATIONS	FOR MORE INFORMATION	

RELATED DOCUMENTS

3RD ANGLE PROJECTION

THIS DRAWING IS CONFIDENTIAL AND THE

3000 CAMPUS DRIVE

SOURCE DRAWING - FOR REFERENCE ONLY

	ONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RC	K	(763) (763)	LIS, MN -544-7 553-7	55441 7769 300 708 fax
L	DRFT DJW APVD	DATE 10/15/07 SCALE 1=1.0	DESCRIPTION	WKBV	4T-*		
UNIT OF MEASUREMENT		IDENTIFICATION NO.				REV	
	MILLIMETE	ER [INCH]					Е
l	DO NOT SCALE	THIS DRAWING	FILE: 777015835			SHEET	1 OF 1