


SP	ECIFICATIONS		
CONTACT CARRIER MATERIAL	TPU		
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK		
CONTACT MATERIAL/PLATING	BRASS/GOLD		
COUPLING NUT MATERIAL/PLATING	STAINLESS STEEL/PASSIVATED		
RATED CURRENT [A]	4.0 A		
RATED VOLTAGE [V]	250 V		
OUTER JACKET MATERIAL/COLOR	PVC/BLUE		
CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)		
NUMBER OF CONDUCTORS [AWG]	3x18 AWG		
DRAIN/SHIELD	20 AWG/ALUMINUM-POLYESTER FOIL (PAIR)		
TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)		
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K		
CONDUCTOR ARRANGEMENT	1 SHIELDED TWISTED PAIR, 1 GROUND, 1 DRAIN		
CABLE RATINGS	UL: ITC-ER/PLTC-ER, DIRECT BURIAL, 105C CSA: CIC, 90C, 600V C(UL): 245/1309 MARINE SHIPBOARD & IEEE 1580		

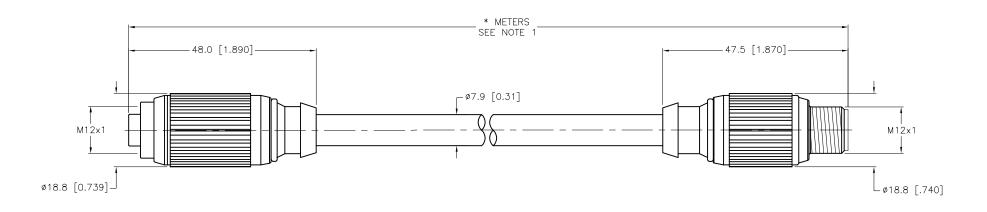

CABLE LENGTH	TOLERANCE *				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER				
STRIP LENGTH	TOLERANCE*				
0-7mm	±0.5mm				
8-29mm	±1.0mm				
30-49mm	±2.0mm				
50-69mm	±3.0mm				
70-100mm	±4.0mm				
OVER 100mm	±5.0mm				
* UNLESS OTHERWISE SPECIFIED					

SOURCE DRAWING - FOR REFERENCE ONLY

	RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		MINNEA 1-8 (76 (76 w	CAMPUS POLIS, MN 00-544- 3) 553-7 3) 553-0 ww.turck.u	I 55441 7769 300 708 fax
	MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS	DRFT MJM APVD	DATE 01/05/07 SCALE 1=1.0	DESCRIPTION P-RKGV 4T-335-*-F	RSGV 4	4T
	SEE SPECIFICATIONS FINISH	DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME		IDENTIFICATION NO.		REV
260	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETE	ER [INCH]			G
			DO NOT SCALE	THIS DRAWING	FILE: 777015875	SHEET	1 OF 1

NOTES:

1. "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

G	UPDATED DRAWING	AS	07/01/24	500000010260
REV	DESCRIPTION	BY	DATE	ECO NO.