



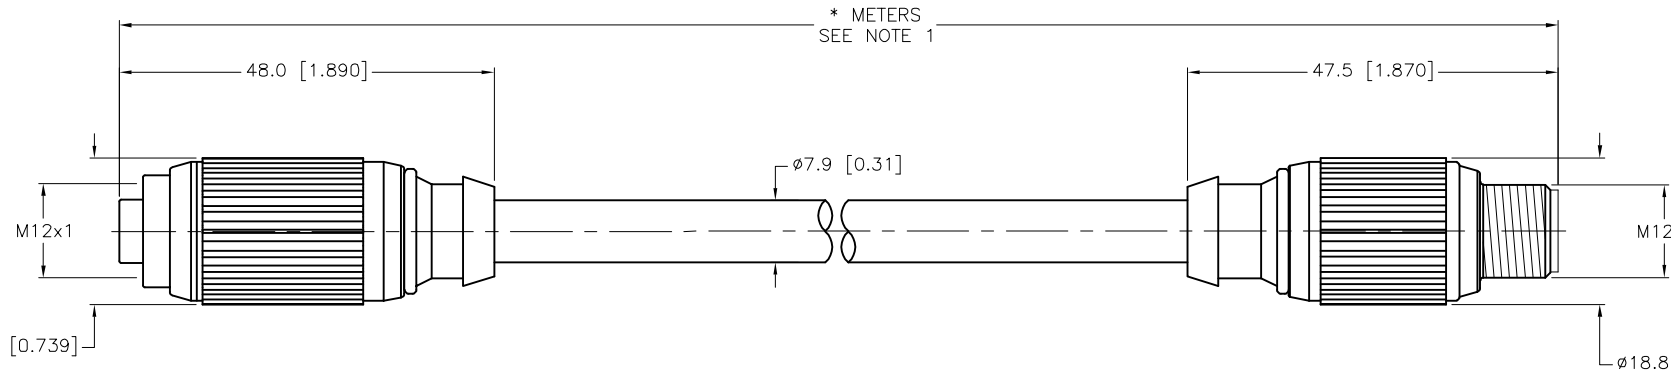



FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 <p>1 = BLUE 2 = BROWN 3 = DRAIN 4 = GREEN/YELLOW</p> 	 <p>1 = BLUE 2 = BROWN 3 = DRAIN 4 = GREEN/YELLOW</p> 	CONTACT CARRIER MATERIAL	TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	STAINLESS STEEL/PASSIVATED
		RATED CURRENT [A]	4.0 A
		RATED VOLTAGE [V]	250 V
		OUTER JACKET MATERIAL/COLOR	PVC/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC/NYLON (NYLON OVERCOAT)
		NUMBER OF CONDUCTORS [AWG]	3x18 AWG
		DRAIN/SHIELD	20 AWG/ALUMINUM-POLYESTER FOIL
		TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K
		CONDUCTOR ARRANGEMENT	1 SHIELDED TWISTED PAIR, 1 GROUND, 1 DRAIN
		CABLE RATINGS	UL: ITC-ER/PLTC-ER, DIRECT BURIAL, 105C CSA: CIC, 90C, 600V C(UL): 245/1309 MARINE SHIPBOARD & IEEE 1580

 <p>* METERS SEE NOTE 1</p>																						
<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr></table> <table><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr></table> <p>* UNLESS OTHERWISE SPECIFIED</p>					CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm
CABLE LENGTH	TOLERANCE*																					
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																					
STRIP LENGTH	TOLERANCE*																					
0-7mm	±0.5mm																					
8-29mm	±1.0mm																					
30-49mm	±2.0mm																					
50-69mm	±3.0mm																					
70-100mm	±4.0mm																					
OVER 100mm	±5.0mm																					
<p>NOTES:</p> <p>1. "*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.</p>																						
G	UPDATE CABLE DIAMETER	KB	04/25/24	80101																		
REV	DESCRIPTION	BY	DATE	ECO NO.																		

RELATED DOCUMENTS

1.
2.
3.
4.

3RD ANGLE PROJECTION



MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

TURCK

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

DRFT MJM

DATE 01/05/07

APVD

SCALE 1=1.0

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

DESCRIPTION

P-RKGV 4T-330-*--RSGV 4T

IDENTIFICATION NO.

REV

G

FILE: 777015881

SHEET 1 OF 1