




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 PAIR 1 < 1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW PAIR 2 < 5 = GRAY 6 = PINK 7 = BLUE 8 = RED 	 PAIR 1 < 1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW PAIR 2 < 5 = GRAY 6 = PINK 7 = BLUE 8 = RED 	CONTACT CARRIER MATERIAL	NYLON or TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	2.0 A
		RATED VOLTAGE [V]	60 VAC/75 VDC
		OUTER CABLE JACKET MATERIAL/COLOR	PVC/BLACK
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	8x24 AWG (4 TWISTED PAIRS)
		DRAIN/SHIELD	24 AWG DRAIN/TINNED-COPPER BRAIDED SHIELD
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS IEC IP67

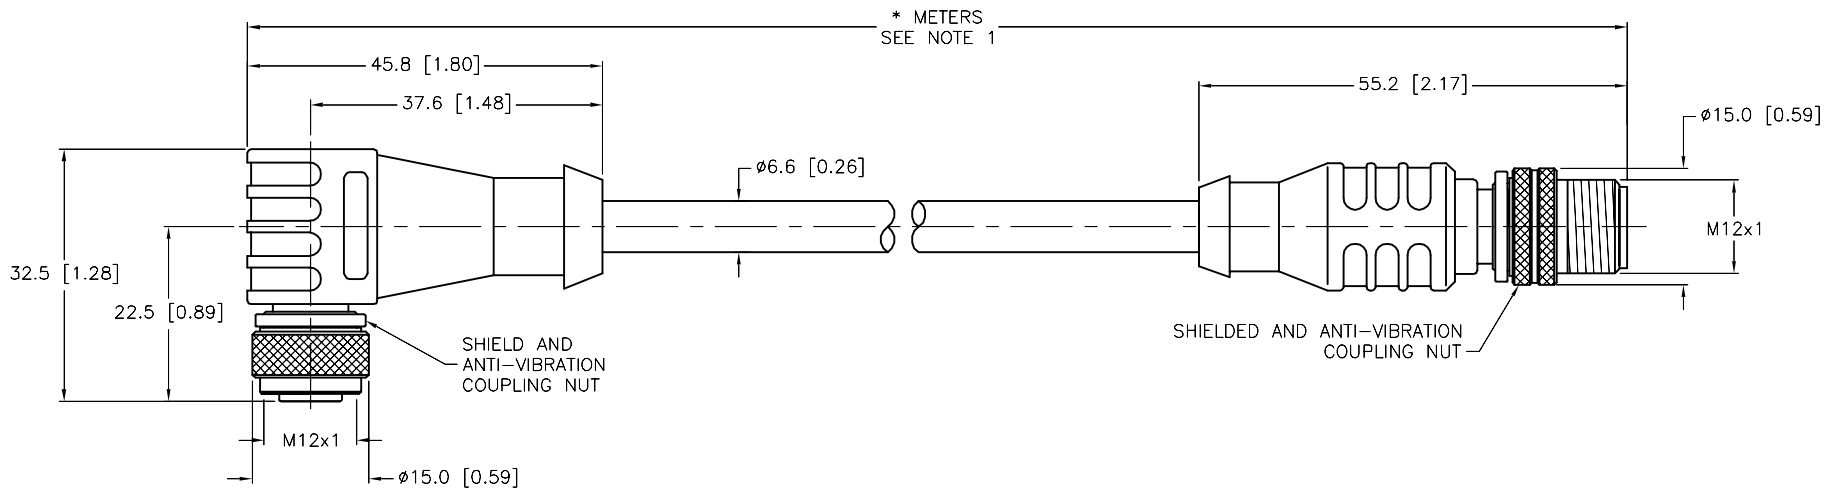


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. COUPLING NUT IS CONNECTED TO SHIELD.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com			
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	RDS	DATE	01/22/07	DESCRIPTION E-WKS 8T-264-*--RSS 8T	
		APVD		SCALE	1=1.0		
FINISH SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING			IDENTIFICATION NO.		REV D
					FILE: 777015934		SHEET 1 OF 1