
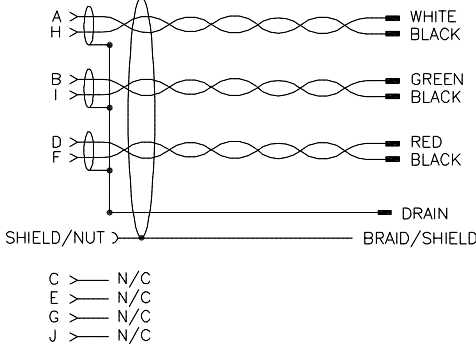
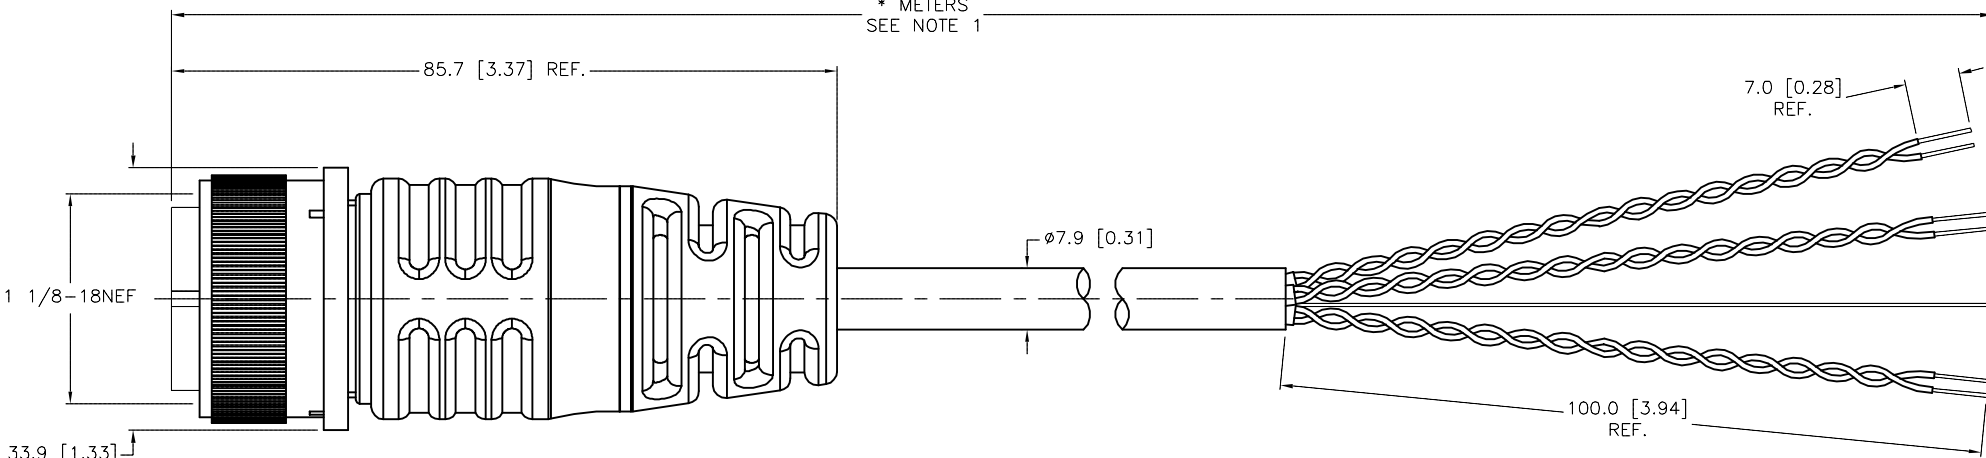


FEMALE END VIEW		WIRING DIAGRAM		SPECIFICATIONS																													
				<table><tr><td>CONTACT CARRIER MATERIAL/COLOR</td><td>NEOPRENE/BLACK</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>COPPER ALLOY/SLIVER</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>ALUMINUM ALLOY/OLIVE DRAB CHROMATE</td></tr><tr><td>MOLD SLEEVE</td><td>BRASS/NICKEL</td></tr><tr><td>RATED CURRENT [A]</td><td>5.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>200 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>PVC/GRAY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>POLYPROPYLENE</td></tr><tr><td>NUMBER OF CONDUCTORS</td><td>6x20 AWG (3x SHIELDED TWISTED PAIR)</td></tr><tr><td>DRAIN</td><td>22 AWG TC COMMON DRAIN</td></tr><tr><td>SHIELD</td><td>FOIL (PAIRS) & 36 AWG TINNED-COPPER BRAID</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +80°C (-40°F to +176°F)</td></tr><tr><td>CONNECTOR TYPE</td><td>MIL-C-5015</td></tr></table>		CONTACT CARRIER MATERIAL/COLOR	NEOPRENE/BLACK	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	COPPER ALLOY/SLIVER	COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE	MOLD SLEEVE	BRASS/NICKEL	RATED CURRENT [A]	5.0 A	RATED VOLTAGE [V]	200 V	OUTER JACKET MATERIAL/COLOR	PVC/GRAY	CONDUCTOR INSULATION MATERIAL	POLYPROPYLENE	NUMBER OF CONDUCTORS	6x20 AWG (3x SHIELDED TWISTED PAIR)	DRAIN	22 AWG TC COMMON DRAIN	SHIELD	FOIL (PAIRS) & 36 AWG TINNED-COPPER BRAID	TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)	CONNECTOR TYPE	MIL-C-5015
CONTACT CARRIER MATERIAL/COLOR	NEOPRENE/BLACK																																
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK																																
CONTACT MATERIAL/PLATING	COPPER ALLOY/SLIVER																																
COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE																																
MOLD SLEEVE	BRASS/NICKEL																																
RATED CURRENT [A]	5.0 A																																
RATED VOLTAGE [V]	200 V																																
OUTER JACKET MATERIAL/COLOR	PVC/GRAY																																
CONDUCTOR INSULATION MATERIAL	POLYPROPYLENE																																
NUMBER OF CONDUCTORS	6x20 AWG (3x SHIELDED TWISTED PAIR)																																
DRAIN	22 AWG TC COMMON DRAIN																																
SHIELD	FOIL (PAIRS) & 36 AWG TINNED-COPPER BRAID																																
TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)																																
CONNECTOR TYPE	MIL-C-5015																																
CONNECTOR TYPE/STYLE/CLASS - MS 3106 E SHELL SIZE - 18 INSERT ARRANGEMENT - 1																																	

		<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr><tr><td colspan="2">* UNLESS OTHERWISE SPECIFIED</td></tr></table>		CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm	* UNLESS OTHERWISE SPECIFIED																														
CABLE LENGTH	TOLERANCE*																																																			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																																																			
STRIP LENGTH	TOLERANCE*																																																			
0-7mm	±0.5mm																																																			
8-29mm	±1.0mm																																																			
30-49mm	±2.0mm																																																			
50-69mm	±3.0mm																																																			
70-100mm	±4.0mm																																																			
OVER 100mm	±5.0mm																																																			
* UNLESS OTHERWISE SPECIFIED																																																				
NOTES: 1. "*" INDICATES LEAD LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.		SOURCE DRAWING - FOR REFERENCE ONLY																																																		
<table><tr><td>RELATED DOCUMENTS</td><td>3RD ANGLE PROJECTION</td><td>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</td><td colspan="2"> TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us </td></tr><tr><td>1.</td><td rowspan="2"></td><td>DRFT</td><td>RDS</td><td>DATE 01/31/07</td></tr><tr><td>2.</td><td>APVD</td><td></td><td>SCALE 1=1.0</td></tr><tr><td>3.</td><td rowspan="8">ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</td><td colspan="2">UNIT OF MEASUREMENT</td><td>DESCRIPTION</td></tr><tr><td>4.</td><td colspan="2">MILLIMETER [INCH]</td><td>E-MK 10-986-*</td></tr><tr><td colspan="2">MATERIAL</td><td colspan="2">SEE SPECIFICATIONS</td></tr><tr><td colspan="2">FINISH</td><td colspan="2">SEE SPECIFICATIONS</td></tr><tr><td colspan="2"></td><td colspan="2">CONTACT TURCK FOR MORE INFORMATION</td></tr><tr><td colspan="2"></td><td colspan="2">DO NOT SCALE THIS DRAWING</td></tr><tr><td colspan="2"></td><td colspan="2"></td></tr><tr><td colspan="2"></td><td colspan="2"></td></tr></table>		RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		1.		DRFT	RDS	DATE 01/31/07	2.	APVD		SCALE 1=1.0	3.	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		DESCRIPTION	4.	MILLIMETER [INCH]		E-MK 10-986-*	MATERIAL		SEE SPECIFICATIONS		FINISH		SEE SPECIFICATIONS				CONTACT TURCK FOR MORE INFORMATION				DO NOT SCALE THIS DRAWING													
RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us																																																	
1.		DRFT	RDS	DATE 01/31/07																																																
2.		APVD		SCALE 1=1.0																																																
3.	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT		DESCRIPTION																																																
4.		MILLIMETER [INCH]		E-MK 10-986-*																																																
MATERIAL		SEE SPECIFICATIONS																																																		
FINISH		SEE SPECIFICATIONS																																																		
		CONTACT TURCK FOR MORE INFORMATION																																																		
		DO NOT SCALE THIS DRAWING																																																		
<table><tr><td>C</td><td>UPDATE CABLE DIA., CURRENT AND COND. INSULATION</td><td>RDS</td><td>12/04/19</td><td>75467</td></tr><tr><td>REV</td><td>DESCRIPTION</td><td>BY</td><td>DATE</td><td>ECO NO.</td></tr></table>		C	UPDATE CABLE DIA., CURRENT AND COND. INSULATION	RDS	12/04/19	75467	REV	DESCRIPTION	BY	DATE	ECO NO.																																									
C	UPDATE CABLE DIA., CURRENT AND COND. INSULATION	RDS	12/04/19	75467																																																
REV	DESCRIPTION	BY	DATE	ECO NO.																																																