


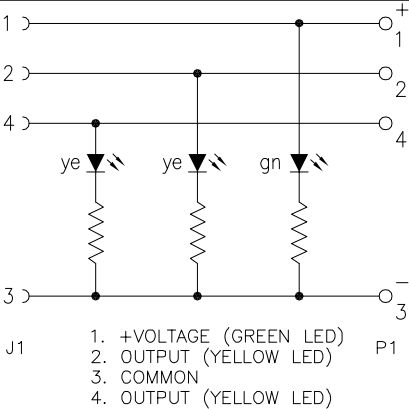


FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	 1. +VOLTAGE (GREEN LED) 2. OUTPUT (YELLOW LED) 3. COMMON 4. OUTPUT (YELLOW LED)	CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/CLEAR (J1)
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW (P1)
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	10-30 V
			OUTER JACKET MATERIAL/COLOR	PVC/GRAY
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	4x22 AWG
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to 221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

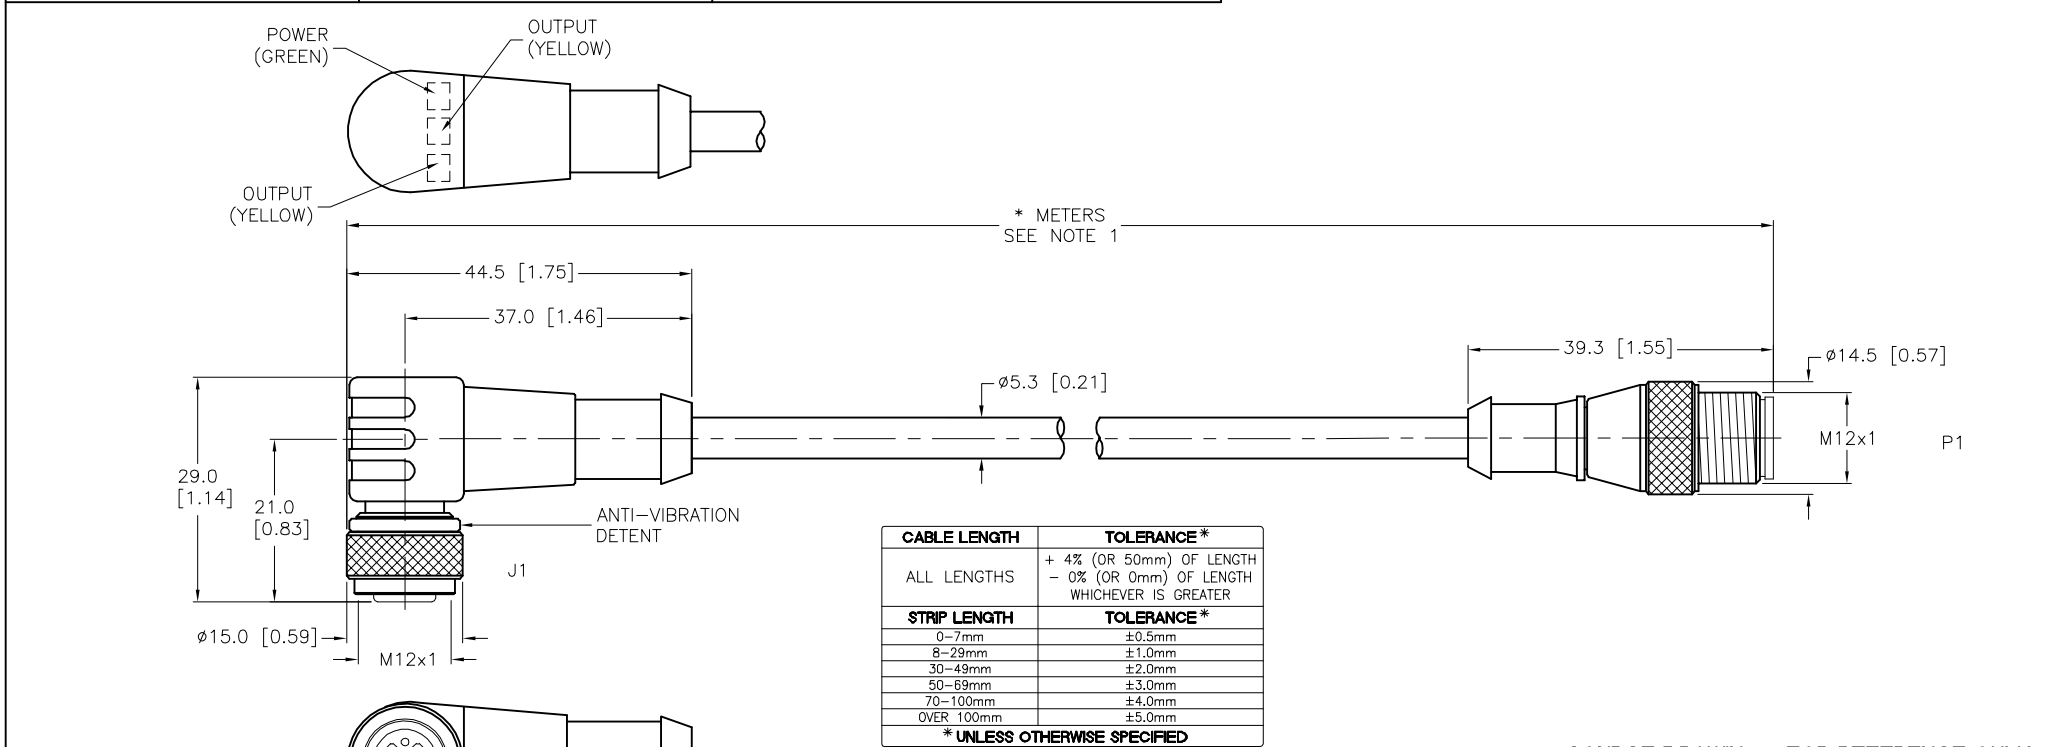

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/SV" DESIGNATES SPECIAL PACKAGING FOR VENDING MACHINES.
- MAX. LENGTH FOR VENDING MACHINE: 3.0 METERS.

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.					DRFT APVD		TR SCALE 1=1.0		DATE 11/21/07	
MATERIAL					UNIT OF MEASUREMENT		DESCRIPTION		WK 4.4T-*P7X3-RS 4.4T/SV	
FINISH					CONTACT TURCK FOR MORE INFORMATION		IDENTIFICATION NO.		REV	
G					DRAWING PROCESSED AS PART OF ECO 37652		KMY		07/23/12	
REV					DESCRIPTION		BY		DATE	
									ECO NO.	
									DO NOT SCALE THIS DRAWING	
									FILE: 777016361	
									SHEET 1 OF 1	