



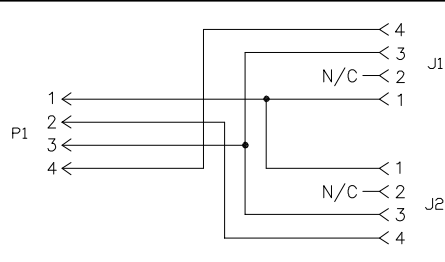


MALE END VIEW		FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
				CONTACT CARRIER MATERIAL	NYLON OR TPU
				MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
				RATED CURRENT [A]	4.0 A
				RATED VOLTAGE [V]	250 V
				OUTER JACKET MATERIAL/COLOR	PVC/GREY
				CONDUCTOR INSULATION MATERIAL	PVC
				NUMBER OF CONDUCTOR [AWG]	3x22 AWG
				TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
				PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

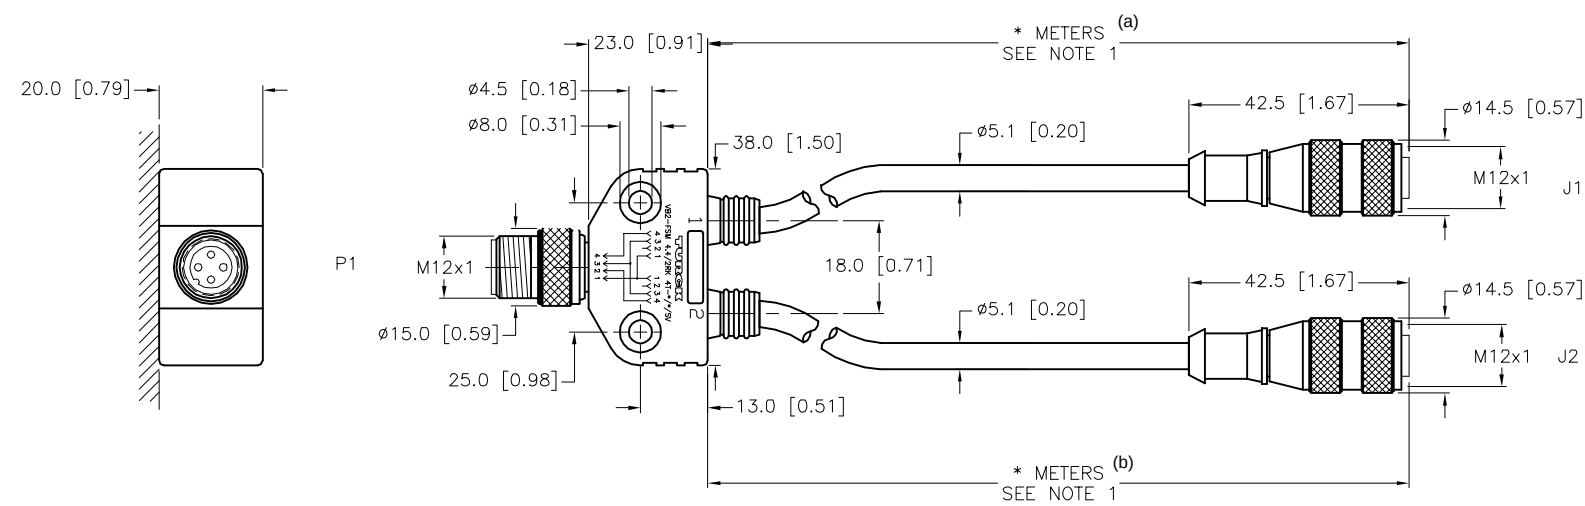

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

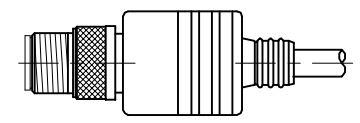

SOURCE DRAWING - FOR REFERENCE ONLY

- NOTES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
 2. "/SV" DESIGNATES VENDING MACHINE PACKAGING.
 3. MAX. LENGTH FOR VENDING MACHINE: 4.0 METERS.

H	UPDATE CLICHE	NF	11/06/18	67398	SEE SPECIFICATIONS	FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING		11
REV	DESCRIPTION	BY	DATE	ECO NO.				FILE: 777016380	SHEET 1 OF 1