

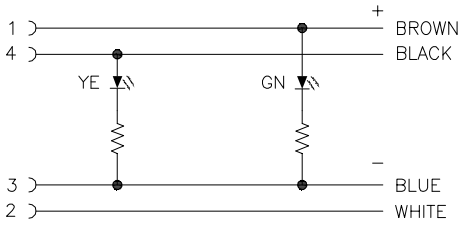


FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 	 1 = + VOLTAGE (GREEN LED) 2 = OUTPUT 3 = COMMON 4 = OUTPUT (YELLOW LED)	CONTACT CARRIER MATERIAL	NYLON OR TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/CLEAR
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	4.0 A LOAD CURRENT/8 mA MAX OPERATING CURRENT AT 30 VDC SUPPLY VOLTAGE
		RATED VOLTAGE [V]	10-30 VDC
		OUTER JACKET MATERIAL/COLOR	PVC/GRAY
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	4x22 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

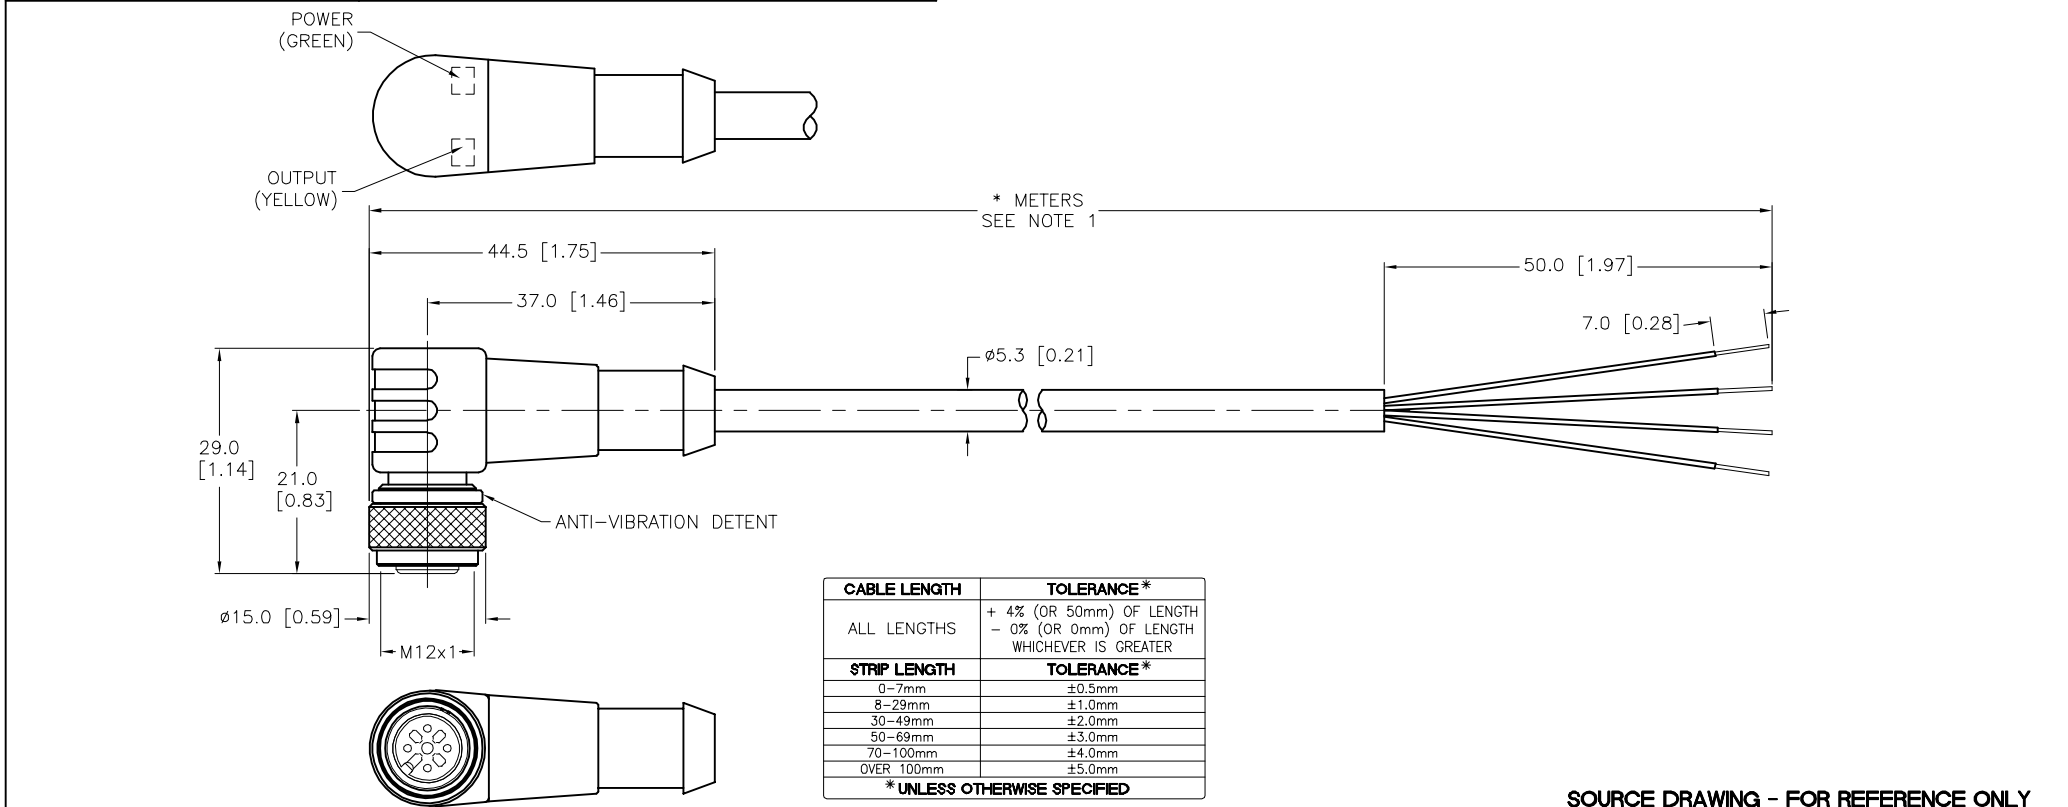

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. "/SV" DESIGNATES SPECIAL PACKAGING FOR VENDING MACHINES.
3. MAX. LENGTH FOR VENDING MACHINE: 6.0 METERS.


NOTES:

1. "∗" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/SV" DESIGNATES SPECIAL PACKAGING FOR VENDING MACHINES.

3. MAX. LENGTH FOR VENDING MACHINE: 6.0 METERS.

E	UPDATE WIRING DIAGRAM AND SPECS	LV	09/01/22	77912
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS	1.		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
	2.						
	3.						
	4.						
MATERIAL	SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	KMY	DATE	03/26/12	DESCRIPTION
			APVD	J.S.	SCALE	1=1.0	
FINISH	SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT			IDENTIFICATION NO.	REV
			MILLIMETER [INCH]				
			DO NOT SCALE THIS DRAWING			FILE:777017144	SHEET 1 OF 1