




MALE END VIEW	RJ45S CR END VIEW	SPECIFICATIONS	
 1 = WHITE/ORANGE (+TX) 2 = WHITE/GREEN (+RX) 3 = ORANGE (-TX) 4 = GREEN (-RX)	 12345678 1 = WHITE/GREEN (+RX) 2 = GREEN (-RX) 3 = WHITE/ORANGE (+TX) 4 = N/C 5 = N/C 6 = ORANGE (-TX) 7 = N/C 8 = N/C	CONTACT CARRIER MATERIAL/COLOR (P2)	POLYCARBONATE/CLEAR
		MOLDED HEAD MATERIAL/COLOR (P2)	TPU/BLACK
		CONTACT MATERIAL/PLATING (P2)	BRONZE/GOLD
		CONTACT CARRIER MATERIAL/COLOR (P1)	TPU/BLACK
		MOLDED HEAD MATERIAL/COLOR (P1)	TPU/BLUE-GRAY
		CONTACT MATERIAL/PLATING (P1)	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING (P1)	BRASS/NICKEL
		RATED CURRENT [A]	1.5 A
		RATED VOLTAGE [V]	42 V
		OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL
		CONDUCTOR INSULATION MATERIAL	HDPE
		NUMBER OF CONDUCTORS [AWG]	2UTP×24 AWG, STRANDED
		SHIELDING	ALUM. POLYESTER FOIL & T-C BRAIDED
		TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
		PROTECTION CLASS	IP67 (RJ45/IP20)

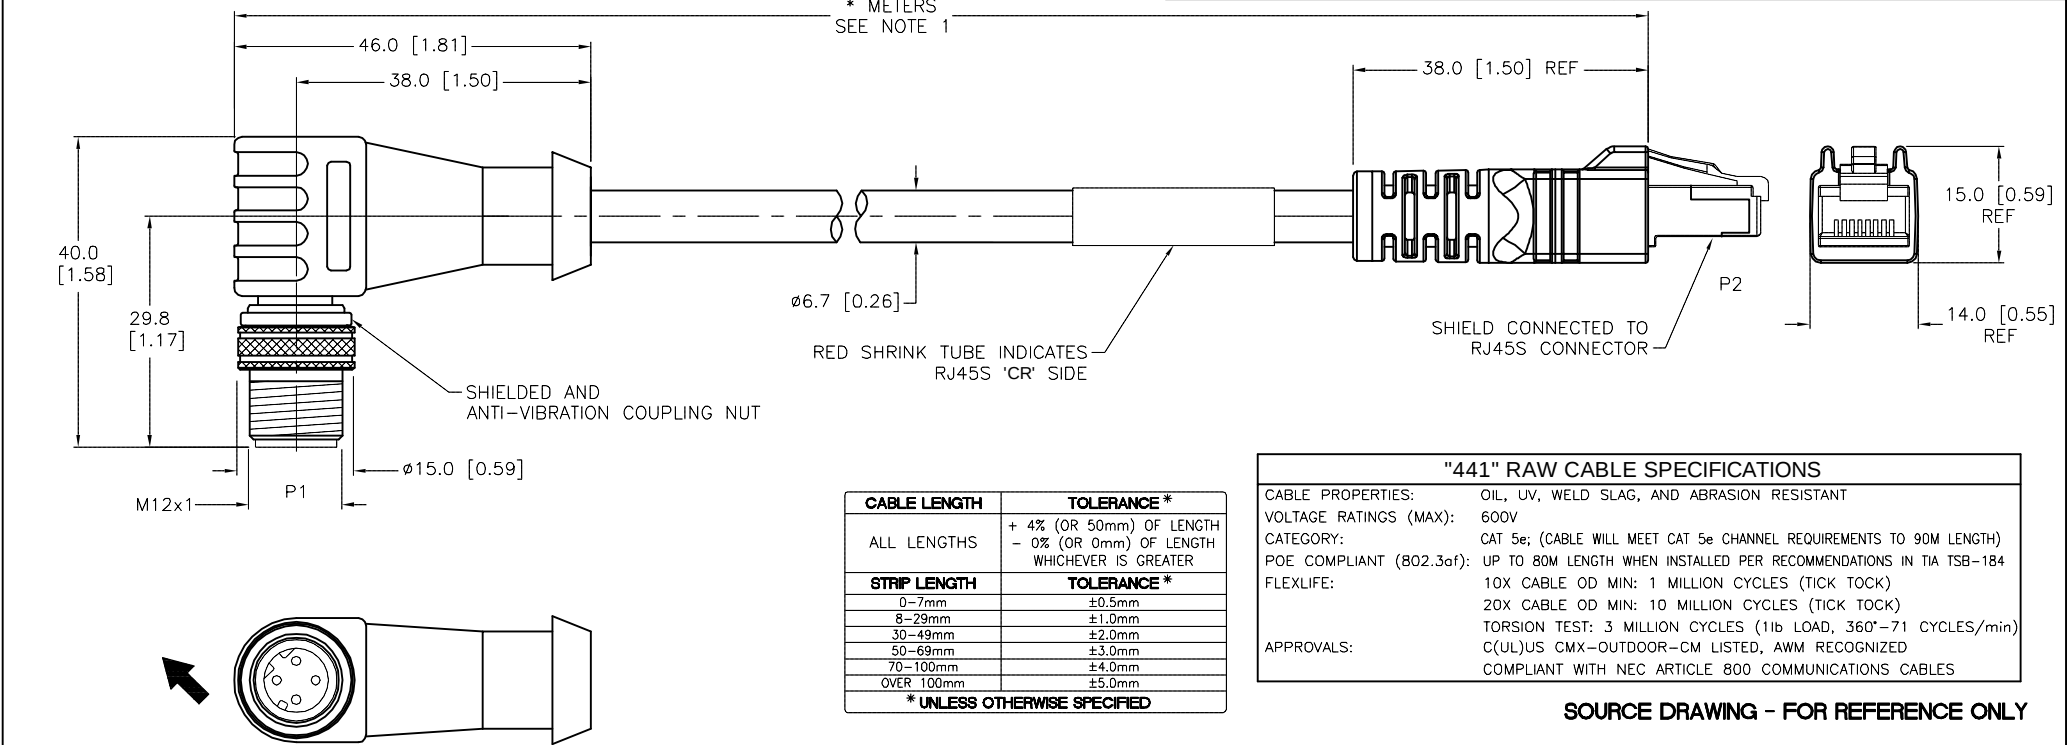

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

 - DESIGNATES PRIMARY KEYWAY DESIGNATION

H	UPDATE CABLE DIAMETER	KMY	11/14/14	47778		FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING		11
REV	DESCRIPTION	BY	DATE	ECO NO.				FILE: 777017611	SHEET 1 OF 1