


FEMALE END VIEW




1 = BROWN	15 = BLUE
2 = WHITE/GREY	16 = BLACK/GREY
3 = BLUE/GREY	17 = BROWN/ORANGE
4 = BROWN/GREY	18 = WHITE/ORANGE
5 = BLACK/YELLOW	19 = BLACK/ORANGE
6 = WHITE/YELLOW	20 = BLACK/GREEN
7 = BLUE/YELLOW	21 = WHITE/GREEN
8 = BROWN/YELLOW	22 = BLUE/GREEN
9 = BLACK/RED	23 = BROWN/GREEN
10 = WHITE/RED	24 = BLUE/ORANGE
11 = BLUE/RED	25 = GREEN/YELLOW
12 = BROWN/RED	26 = GRAY
13 = BLACK	27 = ORANGE
14 = WHITE	28 = N/C

DRAIN/SHIELD

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	27x22 AWG
DRAIN/SHIELD	22 AWG DRAIN/FOIL SHIELD
PROTECTION CLASS	IEC IP67
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)

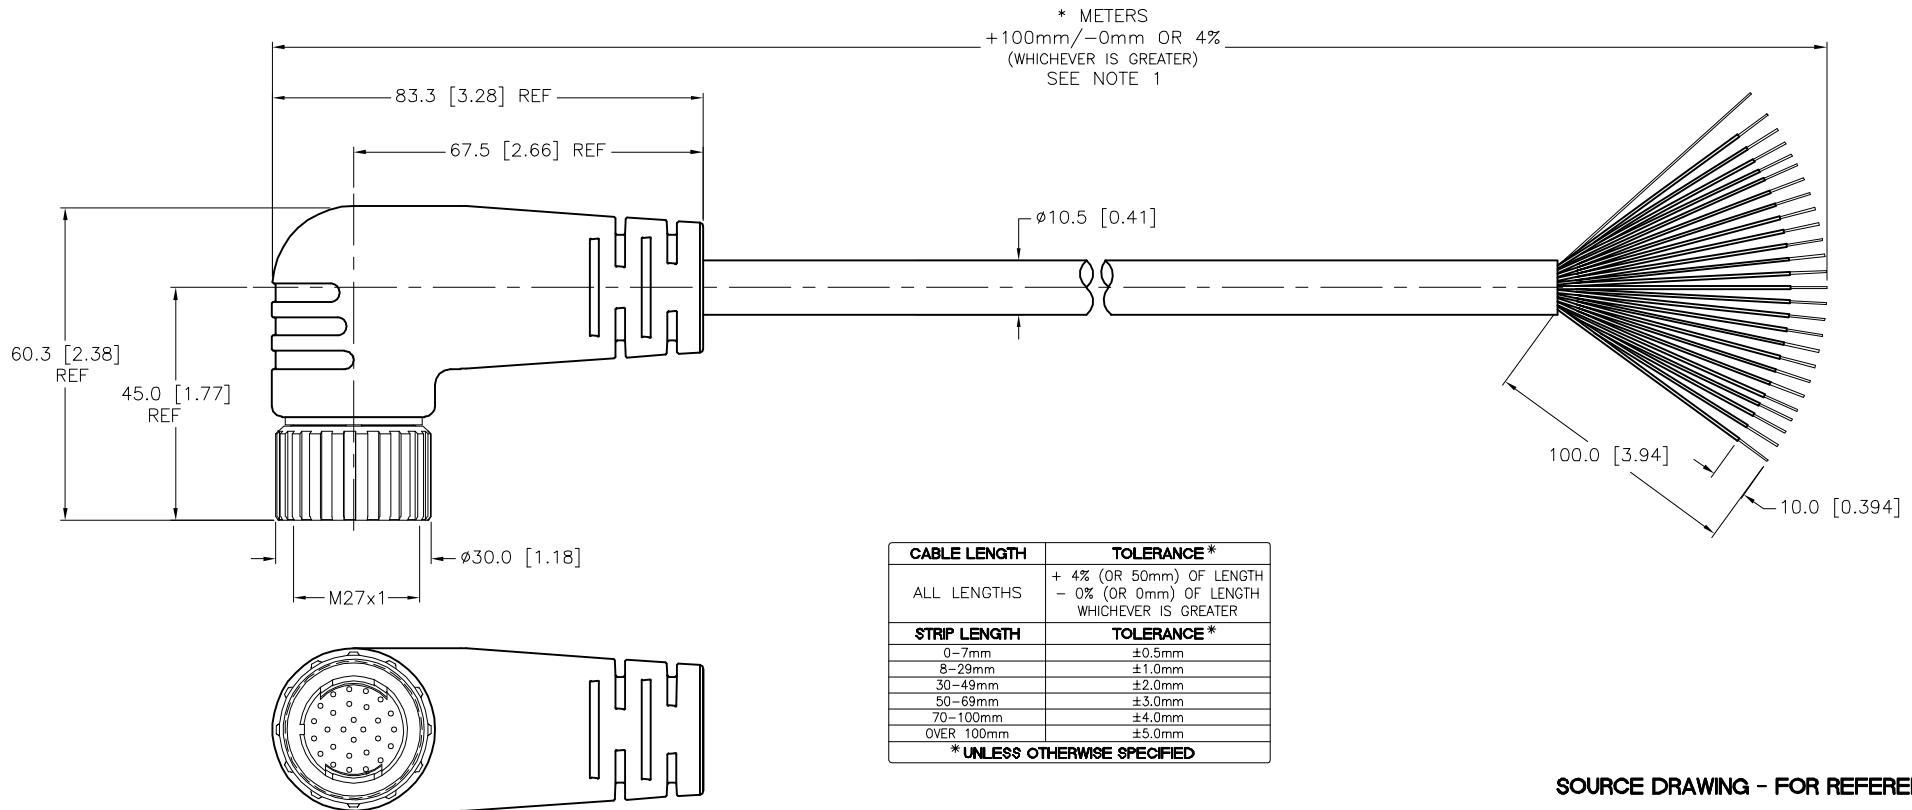

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
	MATERIAL SEE SPECIFICATIONS	DRFT RWC APVD	DATE 06/08/07 SCALE 1=1.5	DESCRIPTION DKWM 28-061-*	
FINISH SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	REV E
DO NOT SCALE THIS DRAWING		FILE: 777017649		SHEET 1 OF 1	

E	UPDATE RATED CURRENT SPECIFICATIONS	KMY	07/24/14	46464
REV	DESCRIPTION	BY	DATE	ECO NO.