


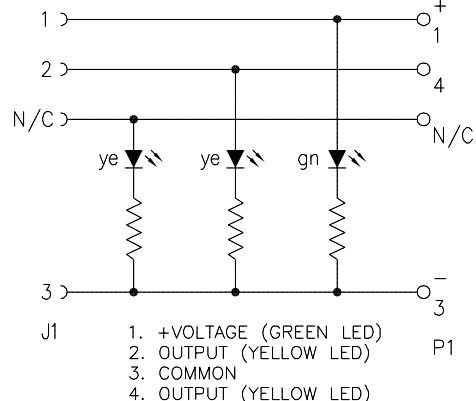


FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = N/C</p>	 <p>1 = BROWN 2 = N/C 3 = BLUE 4 = WHITE</p>	 <p>1. +VOLTAGE (GREEN LED) 2. OUTPUT (YELLOW LED) 3. COMMON 4. OUTPUT (YELLOW LED)</p>	CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/CLEAR (J1)
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW (P1)
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	10-30 V
			OUTER JACKET MATERIAL/COLOR	PVC/GRAY
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	4x22 AWG
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to 221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

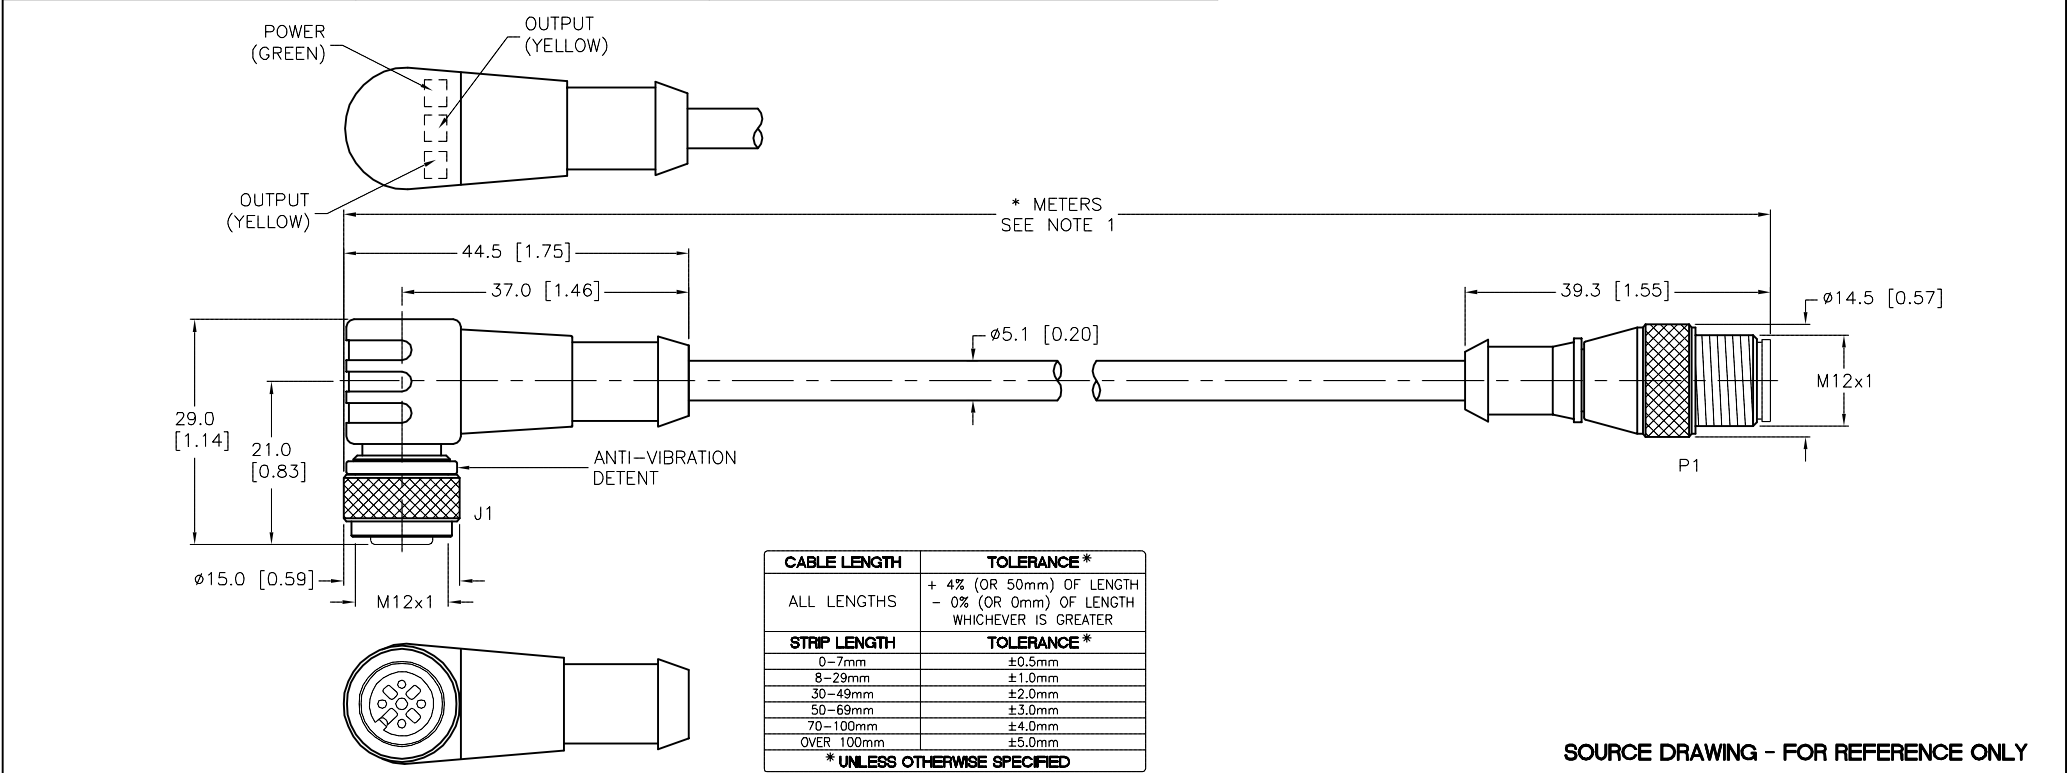


SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/CS10613" DESIGNATES CROSS WIRE EXTENSION CORD.

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT RWC		DATE 06/11/07	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.0	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION WK 4.4T-*--P7X3-RS 4.4T/CS10613	
									IDENTIFICATION NO.	
									REV H	
H UPDATE CONDUCTOR AWG					NF 05/18/17		60196		DO NOT SCALE THIS DRAWING	
REV DESCRIPTION					BY DATE ECO NO.				FILE: 777017768	
									SHEET 1 OF 1	