


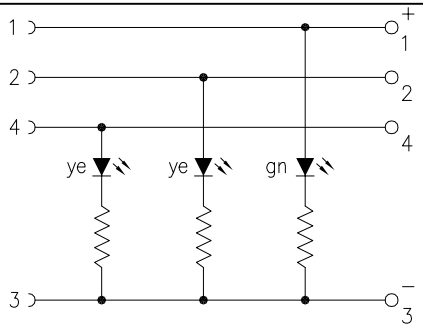


FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	 1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK	 1. +VOLTAGE (GREEN LED) 2. OUTPUT (YELLOW LED) 3. COMMON 4. OUTPUT (YELLOW LED)	CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/CLEAR (J1) TPU/YELLOW (P1)
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	10–30 V
			OUTER JACKET MATERIAL/COLOR	TPE/GRAY
			CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
			NUMBER OF CONDUCTORS [AWG]	4x18 AWG
			TEMPERATURE RANGE	–40°C to +105°C (–40°F to 221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

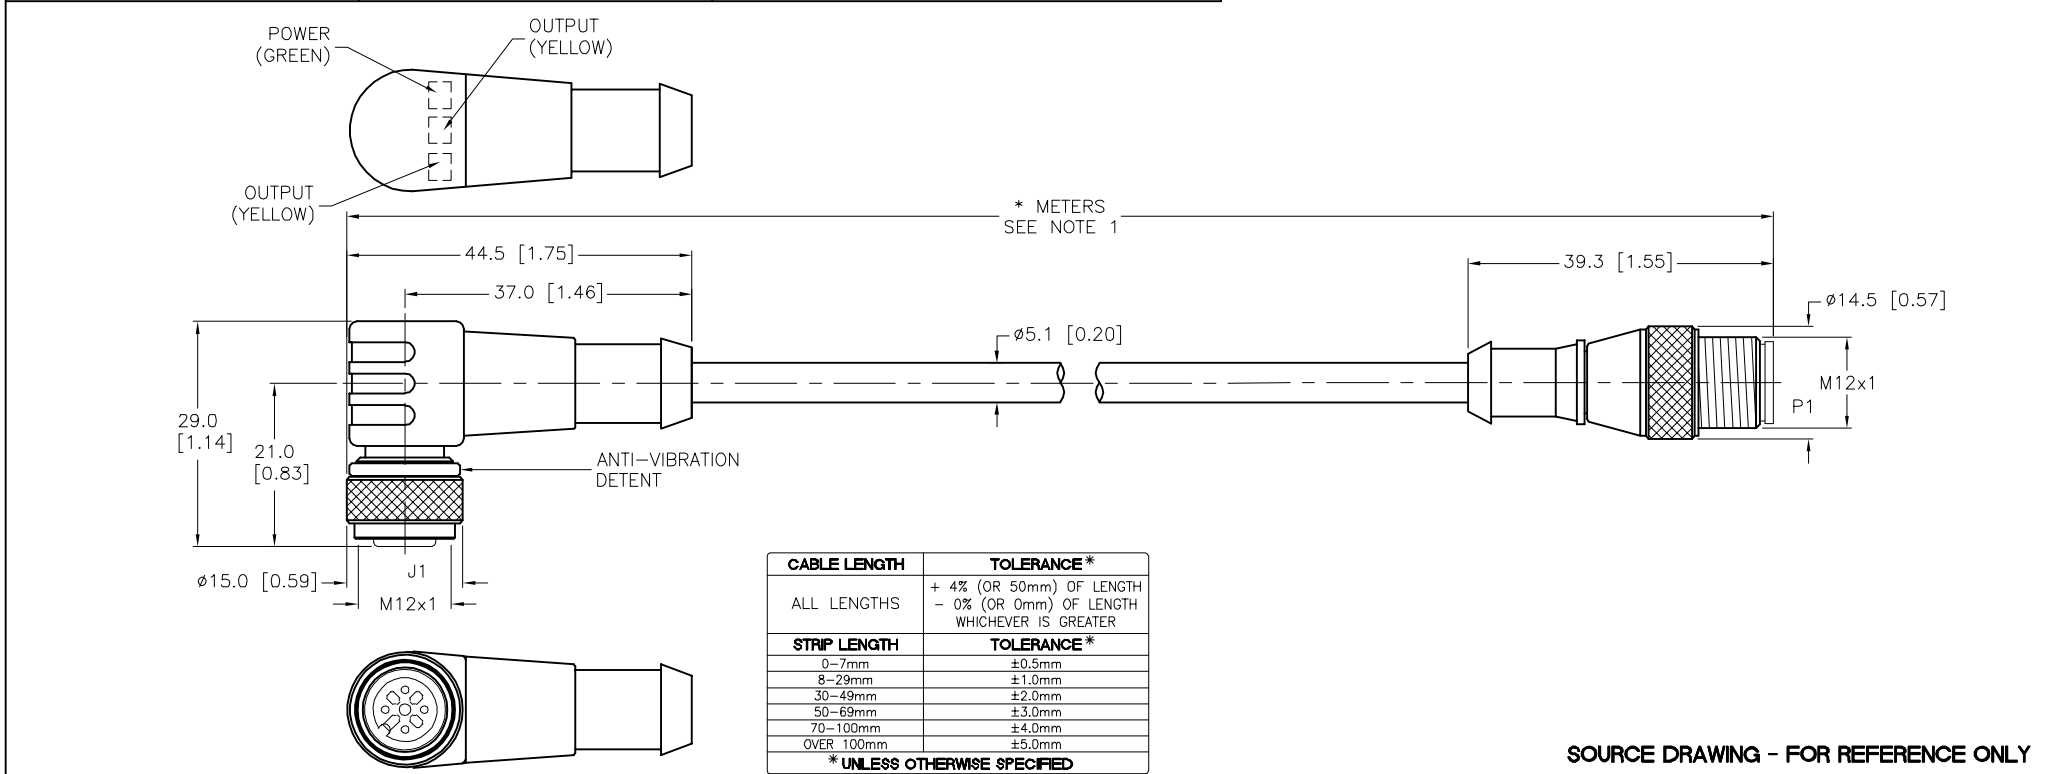

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S101" DESIGNATES FLEXLIFE-20 AND C-TRACK CABLE.


SOURCE DRAWING – FOR REFERENCE ONLY

NOTES:

1. "＊" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

2. "/S101" DESIGNATES FLEXLIFE-20 AND C-TRACK CABLE.

J	ADD CTRACK TO /S101 NOTE	CBM	02/18/14	44634
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
		DRFT	RWC			DATE	06/11/07
		APVD				SCALE	1=1.0
		UNIT OF MEASUREMENT				IDENTIFICATION NO.	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY			WK 4.4T-＊-P7X3-RS 4.4T/S101			
FINISH		CONTACT TURCK FOR MORE INFORMATION		REV J			
		MILLIMETER [INCH]		FILE: 777017774			
		DO NOT SCALE THIS DRAWING		SHEET 1 OF 1			

J	ADD CTRACK TO /S101 NOTE	CBM	02/18/14	44634
REV	DESCRIPTION	BY	DATE	ECO. NO.