
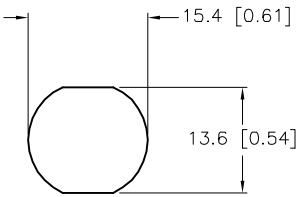

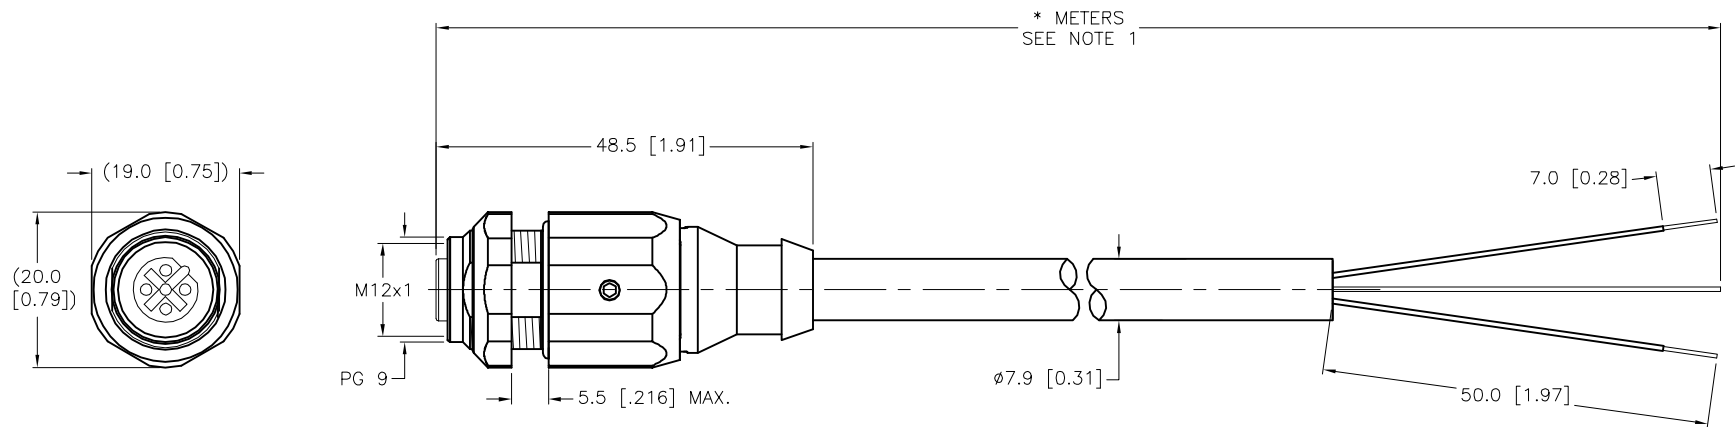


FEMALE END VIEW		MOUNTING HOLE		SPECIFICATIONS																											
<div><p>1 = N/C 2 = GREEN (BUS_A) 3 = N/C 4 = RED (BUS_B) 5 = BARE (SHIELD)</p></div>		<div></div>																													
<div></div>				<table><tr><td>CONTACT CARRIER MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>MOLDED HEAD MATERIAL/COLOR</td><td>TPU/BLACK</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>COUPLING NUT MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>RATED CURRENT [A]</td><td>4.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>250 V</td></tr><tr><td>OUTER JACKET MATERIAL/COLOR</td><td>TPU/VIOLET</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>POLYETHYLENE</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>2x22 AWG (SHIELDED DATA PAIR WITH 22 AWG DRAIN)</td></tr><tr><td>SHIELDING</td><td>ALUM. MYLAR PLUS TINNED COPPER BRAIDED</td></tr><tr><td>TEMPERATURE RANGE</td><td>-40°C to +80°C (-40°F to +176°F)</td></tr><tr><td>PROTECTION CLASS</td><td>IEC IP67</td></tr><tr><td>MAX. PANEL THICKNESS</td><td>5.5mm [0.216"]</td></tr></table>		CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK	MOLDED HEAD MATERIAL/COLOR	TPU/BLACK	CONTACT MATERIAL/PLATING	BRASS/GOLD	COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	RATED CURRENT [A]	4.0 A	RATED VOLTAGE [V]	250 V	OUTER JACKET MATERIAL/COLOR	TPU/VIOLET	CONDUCTOR INSULATION MATERIAL	POLYETHYLENE	NUMBER OF CONDUCTORS [AWG]	2x22 AWG (SHIELDED DATA PAIR WITH 22 AWG DRAIN)	SHIELDING	ALUM. MYLAR PLUS TINNED COPPER BRAIDED	TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)	PROTECTION CLASS	IEC IP67	MAX. PANEL THICKNESS	5.5mm [0.216"]
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK																														
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK																														
CONTACT MATERIAL/PLATING	BRASS/GOLD																														
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																														
RATED CURRENT [A]	4.0 A																														
RATED VOLTAGE [V]	250 V																														
OUTER JACKET MATERIAL/COLOR	TPU/VIOLET																														
CONDUCTOR INSULATION MATERIAL	POLYETHYLENE																														
NUMBER OF CONDUCTORS [AWG]	2x22 AWG (SHIELDED DATA PAIR WITH 22 AWG DRAIN)																														
SHIELDING	ALUM. MYLAR PLUS TINNED COPPER BRAIDED																														
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)																														
PROTECTION CLASS	IEC IP67																														
MAX. PANEL THICKNESS	5.5mm [0.216"]																														




CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

#### NOTE:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

#### SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL		DRFT RDS		DATE 06/28/07		DESCRIPTION FKSDWEV 456-*M	
FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		SCALE 1=1.0		IDENTIFICATION NO.	
CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT <b>MILLIMETER [ INCH ]</b>		DO NOT SCALE THIS DRAWING		REV F	
UPDATE PROTECTION CLASS		NF		10/04/23		79346	
DESCRIPTION		BY		DATE		ECO NO.	