





FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
					
1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK		1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK			
					
				CONTACT CARRIER MATERIAL TPU OR NYLON	
				MOLDED HEAD MATERIAL/COLOR TPU/YELLOW	
				CONTACT MATERIAL/PLATING BRASS/GOLD	
				COUPLING NUT MATERIAL/PLATING BRASS/NICKEL	
				RATED CURRENT [A] 4.0 A	
				RATED VOLTAGE [V] 250 VAC	
				OUTER CABLE JACKET MATERIAL/COLOR TPU/GRAY	
				CONDUCTOR INSULATION MATERIAL PVC	
				NUMBER OF CONDUCTORS [AWG] 4x22 AWG	
				DRAIN/SHIELD 22 AWG/ALUM.-POLYESTER FOIL	
				TEMPERATURE RANGE -40°C to +90°C (-40°F to +194°F)	
				PROTECTION CLASS MEETS NEMA 1,3,4,6P AND IEC IP68	

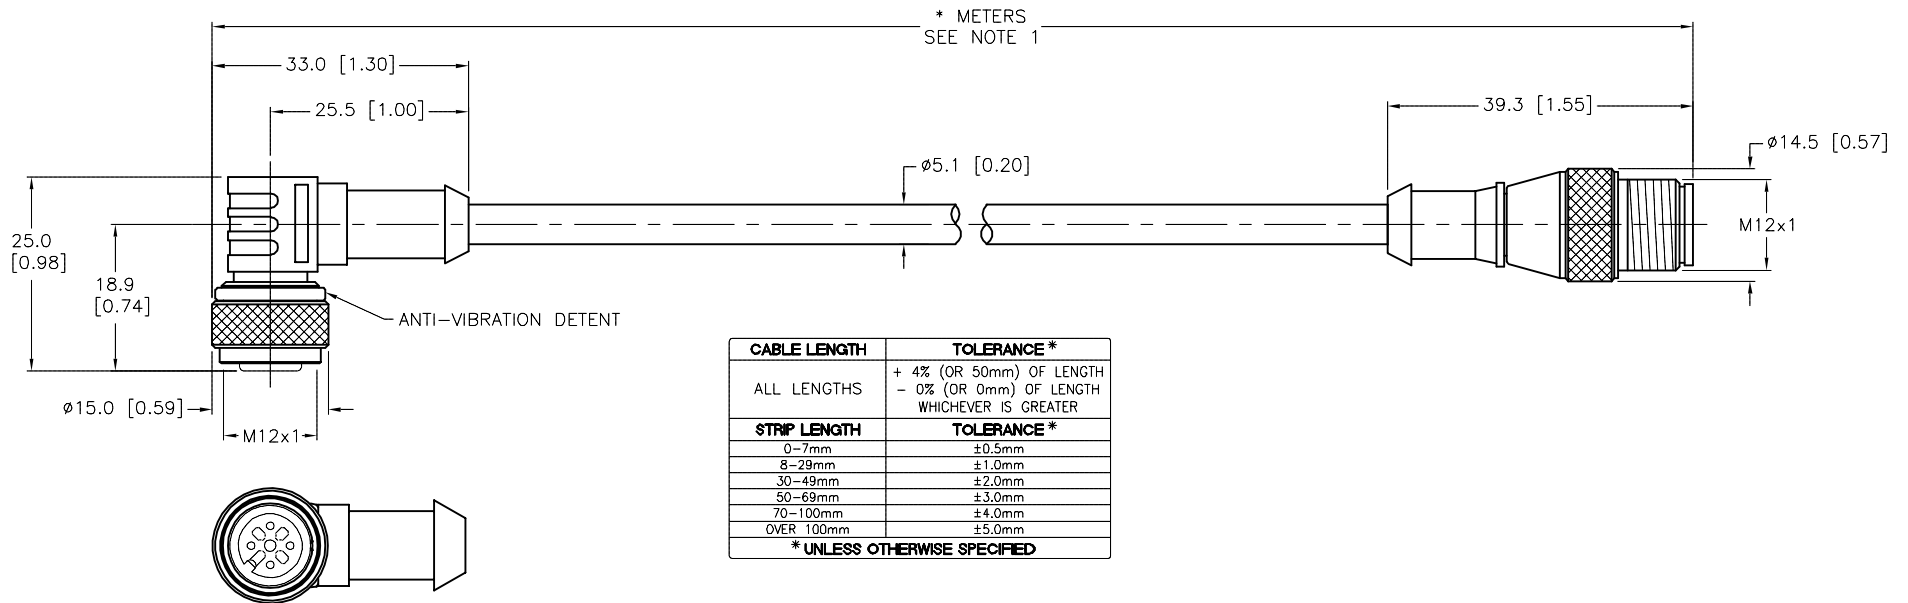

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S90" INDICATES THERMOPLASTIC POLYURETHANE (TPU) CABLE.
- "/S618" DESIGNATES CABLE WITH ALUMINIZED-POLYESTER SHIELD AND DRAIN WIRE. DRAIN IS NOT CONNECTED AT THE MOLDED END.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.						DRFT RDS		DATE 07/02/07	
MATERIAL				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DSGN		SCALE 1=1.0	
FINISH				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION WK 4.4T-*--RS 4.4T/S90/S618	
SEE SPECIFICATIONS				DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.		REV E	
SEE SPECIFICATIONS				FILE: 777018000		SHEET 1 OF 1			

E	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/06/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.