


MALE END VIEW



1 = BROWN

2 = WHITE/GREY

3 = BLUE/GREY

4 = BROWN/GREY

5 = BLACK/YELLOW

6 = WHITE/YELLOW

7 = BLUE/YELLOW

8 = BROWN/YELLOW

9 = BLACK/RED

10 = WHITE/RED

11 = BLUE/RED

12 = BROWN/RED

13 = BLACK

14 = WHITE

15 = BLUE

16 = BLACK/GREY

17 = BROWN/ORANGE

18 = WHITE/ORANGE

19 = BLACK/ORANGE

20 = BLACK/GREEN

21 = WHITE/GREEN

22 = BLUE/GREEN

23 = BROWN/GREEN

24 = BLUE/ORANGE

25 = GREEN/YELLOW


26 = GRAY

27 = ORANGE

28 = N/C

DRAIN/SHIELD

SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	27x22 AWG
DRAIN/SHIELD	22 AWG DRAIN/FOIL SHIELD
PROTECTION CLASS	IEC IP67
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)

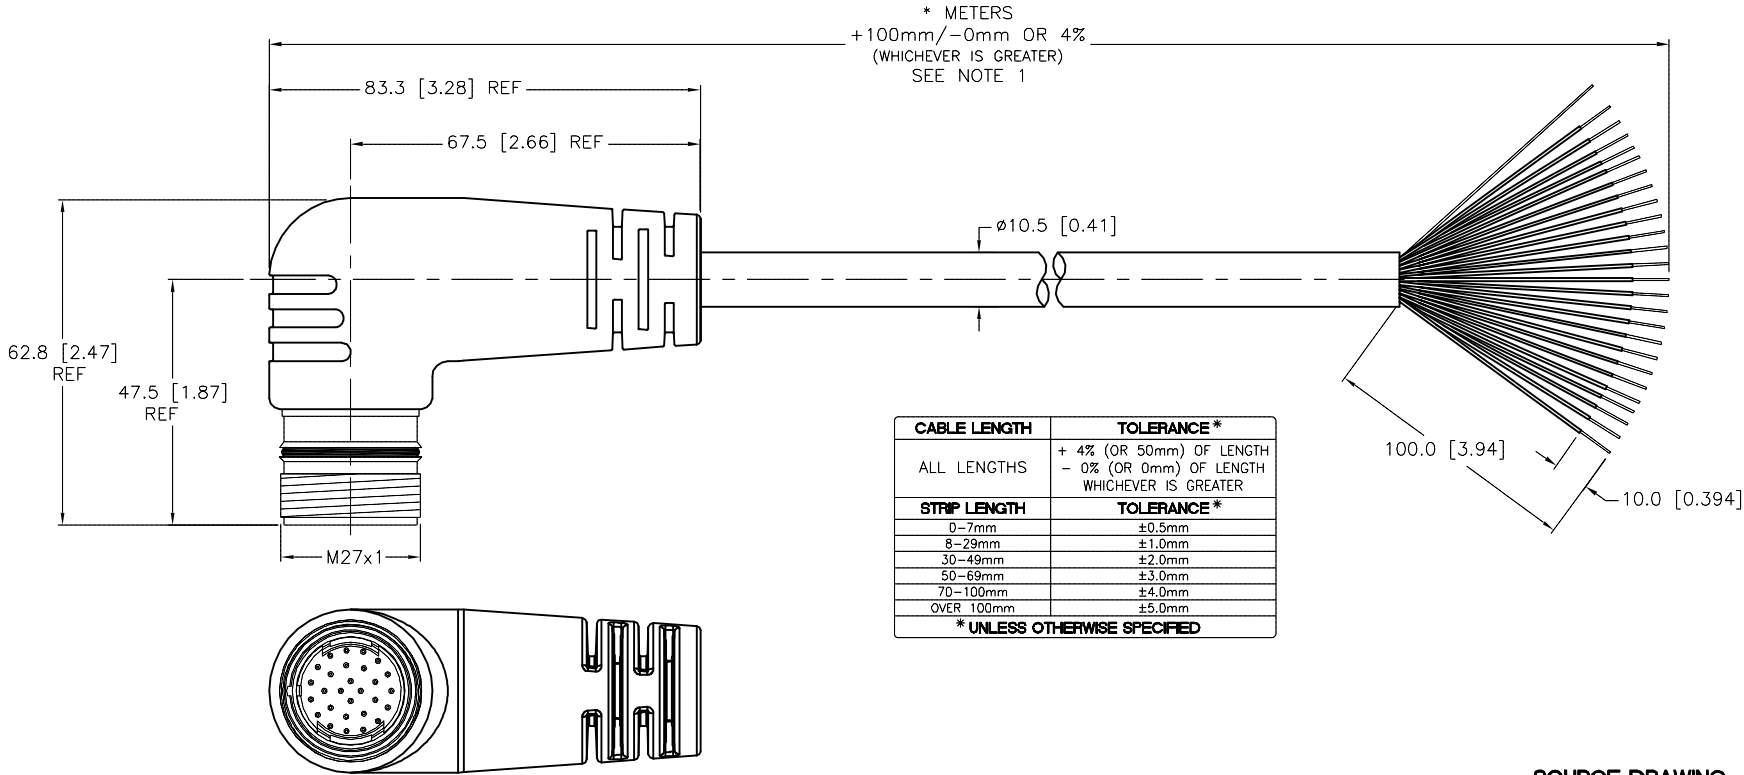

* METERS
+100mm/-0mm OR 4%
(WHICHEVER IS GREATER)
SEE NOTE 1

CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

RELATED DOCUMENTS

1.

2.

3.

4.


MATERIAL

SEE SPECIFICATIONS

FINISH

SEE SPECIFICATIONS

3RD ANGLE PROJECTION



ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT RDS

APVD

DATE 07/16/07

SCALE 1=1.5

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

TURCK INC

High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

DESCRIPTION

DSSWM 28-061-*

IDENTIFICATION NO.

777018360

REV

F

SHEET 1 OF 1

F	UPDATE RATED CURRENT SPECIFICATIONS	KMY	07/24/14	46464
REV	DESCRIPTION	BY	DATE	ECO NO.