


C UPDATE PROTECTION CLASS

REV DESCRIPTION

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	TPU/BLUE-GRAY
MOLDED HEAD MATERIAL/COLOR	TPU/BLUE-GRAY
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
CABLE JACKET/COLOR	TPE/GRAY
CONDUCTOR INSULATION MATERIAL	FOAMED HDPE (DATA), PVC (POWER)
NUMBER OF CONDUCTORS [AWG]	2x18 AWG, 2x15 AWG, 18 AWG DRAIN
SHIELDING	FOIL(PAIRS), ALUM. FOIL (OVERALL), T-C BRAIDED
TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K

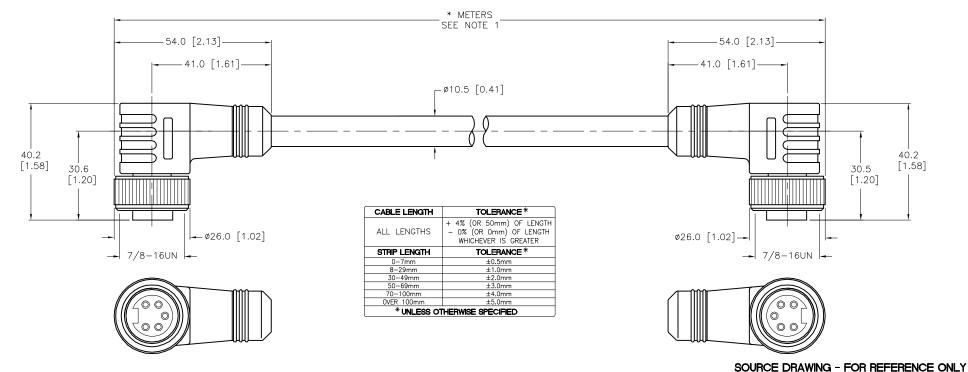

3RD ANGLE PROJECTION

INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK 2. INC. USE OF THIS DOCUMENT WITHOUT 3. WRITTEN PERMISSION IS PROHIBITED. NOTES: MATERIAL DATE 04/28/10 DRFT DESCRIPTION RDS 1. "\*" INDICATES CABLE LENGTH IN METERS, CONTACT TURCK TO ORDER SPECIFIC ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY SCALE 1=1.3 APVD LENGTHS. UNIT OF MEASUREMENT IDENTIFICATION NO. FINISH MILLIMETER [ INCH ] CONTACT TURCK FOR MORE

76628

ECO NO.

CBM 04/13/21

DATE

RELATED DOCUMENTS

DO NOT SCALE THIS DRAWING

WKM WKM 5730-\*M

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769

(763) 553-7300

www.turck.us

(763) 553-0708 fax

REV FILE: 777019046 SHEET 1 OF 1